

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

29288.4600

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5)

To be assigned **10/019418**

INTERNATIONAL APPLICATION NO.

PCT/JP00/04165

INTERNATIONAL FILING DATE

23 June 2000

PRIORITY DATE CLAIMED

24 June 1999

TITLE OF INVENTION

FLOWMETER

APPLICANT(S) FOR DO/EO/US

Yasuhiro UMEKAGE; Yukio NAGAOKA; Osamu EGUCHI; Shuji ABE; Yuji NAKABAYASHI; Kenzo OHJI;
Fumikazu SHIBA; Akihisa ADACHI; Masahiko HASHIMOTO; Toshiharu SATO; and Yuji FUJII

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☐ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

Return Postcard; Copy of Reply to Written Opinion; Article 34 Amendment filed 06/08/2001;
PLEASE CONSIDER THE PRELIMINARY AMENDMENT ATTACHED HERETO PRIOR TO CALCULATING
THE FILING FEE FOR THIS APPLICATION.

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5)

INTERNATIONAL APPLICATION NO.

ATTORNEY'S DOCKET NUMBER

10-6019418

PCT/JP00/04165

29288.4600

24. The following fees are submitted.

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =**CALCULATIONS PTO USE ONLY**Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☒ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	79 - 20 =	59	x \$18.00
Independent claims	9 - 3 =	6	x \$84.00
Multiple Dependent Claims (check if applicable).			<input type="checkbox"/>

TOTAL OF ABOVE CALCULATIONS =☐ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.**SUBTOTAL =**Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).**TOTAL NATIONAL FEE =**

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).

TOTAL FEES ENCLOSED =

Amount to be:	\$
refunded	
charged	\$

- a. ☒ A check in the amount of \$2,586.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 19-2814. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Michael K. Kelly
 SNELL & WILMER, LLP
 One Arizona Center
 400 E. Van Buren Street
 Phoenix, AZ 85004-2202
 P: (602) 382-6291
 F: (602) 382-6070

SIGNATURE

Michael K. Kelly

NAME

32,848

REGISTRATION NUMBER

December 21, 2001

DATE

IN THE UNITED STATES PATENT AND *PATENT*
TRADEMARK OFFICE

Inventor(s):	Yasuhiro UMEKAGE, et al.	Docket No:	29288.4600
Int'l Serial No:	PCT/JP00/04165	Int'l Filing Date:	June 23, 2000
Priority Date:	June 24, 1999	Serial No.:	To Be Assigned
Group Art Unit:	To Be Assigned	Examiner:	To Be Assigned
TITLE:	FLOWMETER		

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

Prior to calculating the filing fee and prior to examination of the above-identified application, please enter the following preliminary amendment:

In the Claims:

Please cancel claims 1-69 without prejudice or disclaimer.

Please add the following claims 70-148:

70. (NEW) A flowmeter, comprising:

transmission/reception means for transmitting/receiving a signal using a state change of fluid that flows in a flow path;

repetition means for repeating the transmission/reception of the signal by the transmission/reception means a predetermined number of times;

time measurement means for measuring a propagation time of a state change of the fluid during when the transmission/reception of the signal is repeated by the repetition means;

flow rate detection means for detecting a flow rate of the fluid based on the propagation time measured by the time measurement means;

frequency detection means for detecting a frequency at which the flow rate of the fluid varies; and

number-of-times change means for changing the predetermined number of repetition times according to the frequency detected by the frequency detection means.

71. (NEW) A flowmeter according to claim 70, wherein the transmission/reception means transmits/receives the signal by utilizing propagation of a sonic wave as the state change of the fluid.

72. (NEW) A flowmeter according to claim 70, wherein the transmission/reception means transmits/receives the signal by utilizing propagation of heat as the state change of the fluid.

73. (NEW) A flowmeter according to claim 70, further comprising elapsed time detection means for detecting an elapsed time for the state change of the fluid based on an output from the time measurement means,

wherein the frequency detection means detects the frequency based on the output from the elapsed time detection means.

74. (NEW) A flowmeter according to claim 70, wherein the number-of-times change means sets the predetermined number of repetition times so as to be substantially a multiple of a cycle of the frequency.

75. (NEW) A flowmeter according to claim 70, further comprising data holding means for holding the output from the elapsed time detection means,

wherein the frequency detection means detects the frequency based on a comparison between data held by the data holding means and data of the propagation time measured by the time measurement means.

76. (NEW) A flowmeter according to claim 70, wherein the number-of-times change means is operated when predetermined processing is performed.

77. (NEW) A flowmeter according to claim 76, wherein the number-of-times change means is operated every time the flow rate detection means performs flow rate measurement.

78. (NEW) A flowmeter according to claim 76, wherein the number-of-times change means changes the predetermined number of repetition times before the flow rate detection means performs the flow rate measurement.

79. (NEW) A flowmeter according to claim 76, wherein the predetermined processing includes: abnormality determining processing for determining whether the flow rate detected by the flow rate detection means is abnormal or not; and flow rate management processing for managing a use state of the flow rate.

80. (NEW) A flowmeter according to claim 70, wherein the predetermined number of repetition times is used when the flow rate detection means next detects the flow rate.

81. (NEW) A flowmeter according to claim 70, wherein the number-of-times change means is operated when the flow rate detected by the flow rate detection means is smaller than a predetermined flow rate.

82. (NEW) A flowmeter, comprising:

transmission/reception means for transmitting/receiving a signal using a state change of fluid that flows in a flow path;

time measurement means for measuring a propagation time of a state change of the fluid during when the signal is transmitted/received by the transmission/reception means;

flow rate detection means for detecting a flow rate of the fluid based on the propagation time measured by the time measurement means;

variation detection means for detecting a pressure variation in the flow path based on an output from the transmission/reception means; and

selection means which switches an output of the transmission/reception means so as to allow the output from the transmission/reception means to be used for detecting a flow rate of the fluid and for detecting a pressure variation in the flow path.

83. (NEW) A flowmeter according to claim 82, further comprising measurement control means for starting measurement in synchronization with a timing of the pressure variation detected by the variation detection means.

84. (NEW) A flowmeter according to claim 82, wherein the transmission/reception means transmits/receives the signal by utilizing propagation of a sonic wave as the state change of the fluid.

85. (NEW) A flowmeter according to claim 82, wherein the transmission/reception means transmits/receives the signal by utilizing propagation of heat as the state change of the fluid.

86. (NEW) A flowmeter according to claim 82, wherein:

the transmission/reception means includes first vibration means provided in an upstream side of the flow path for transmitting/receiving a sonic wave and second vibration means provided in a downstream side of the flow path for transmitting/receiving a sonic wave;

the variation detection means detects the pressure variation based on an output from at least one of the first vibration means and second vibration means;

the flowmeter further includes:

switching means for switching a transmission/reception operation of the signal by the first vibration means and second vibration means, and

measurement control means for controlling the time measurement means such that, when a predetermined pressure variation is detected by the variation detection means, a first measurement time T1 which is required for transmitting the state change of the fluid from the first vibration means to the second vibration means is measured, and when a pressure variation whose direction is opposite to that of the predetermined pressure variation is detected by the variation detection means, a second measurement time T2 which is required for transmitting the state change of the fluid from the second vibration means to the first vibration means is measured,

wherein the flow rate detection means detects the flow rate of the fluid by using the first measurement time T1 and the second measurement time T2.

87. (NEW) A flowmeter according to claim 86, wherein:

the measurement control means performs measurement control such that, when the predetermined pressure variation is detected by the variation detection means, the measurement of the first measurement time T1 is started, and when the pressure variation whose direction is opposite to that of the predetermined pressure variation is detected by the variation detection means, the measurement of the second measurement time T2 is started, and in a next measurement time, when the pressure variation whose direction is opposite to that of the predetermined pressure variation is detected by the variation detection means, next measurement of the first measurement time T1 is started, and when the predetermined pressure variation is detected by the variation detection means, next measurement of the second measurement time T2 is started; and

the flow rate detection means detects a first flow rate of the fluid using the first measurement time T1 and the second measurement time T2, detects a second flow rate of the fluid using the first measurement time T1 and the second measurement time T2 which are measured in the next measurement time, and detects a flow rate of the fluid by averaging the first flow rate and the second flow rate.

88. (NEW) A flowmeter according to claim 82, further comprising repetition means for repeating the transmission/reception of the signal by the transmission/reception means for a predetermined number of repetition times.

89. (NEW) A flowmeter according to claim 88, wherein the repetition means repeats the transmission/reception of the signal over a time period which is a multiple of a cycle of a frequency of the pressure variation.

90. (NEW) A flowmeter according to claim 88, wherein the repetition means starts the transmission/reception of the signal when a predetermined pressure variation is detected by the variation detection means, and repeats the transmission/reception of the signal until a pressure variation which is the same as the predetermined pressure variation is next detected by the variation detection means.

91. (NEW) A flowmeter according to claim 82, wherein the variation detection means detects a near-zero portion of an alternating component having a waveform which indicates a pressure variation in the flow path.

92. (NEW) A flowmeter according to claim 82, further comprising: a frequency detection means for detecting the frequency of the pressure variation detected by the variation detection means; and measurement control means for starting flow rate measurement when a frequency detected by the frequency detection means equals a predetermined frequency.

93. (NEW) A flowmeter according to claim 82, further comprising detection cancellation means for automatically starting flow rate measurement after a predetermine time period when the pressure variation cannot be detected by the variation detection means.

94. (NEW) A flowmeter according to claim 86, wherein each of the first vibration means and second vibration means includes a piezoelectric transducer.

95. (NEW) A flowmeter, comprising:

transmission/reception means for transmitting/receiving a signal using a state change of fluid that flows in a flow path;

repetition means for repeating the transmission/reception of the signal by the transmission/reception means a predetermined number of times;

time measurement means for measuring a propagation time of a state change of the fluid during when the transmission/reception of the signal is repeated by the repetition means;

flow rate detection means for detecting a flow rate of the fluid based on the propagation time measured by the time measurement means;

variation detection means for detecting a pressure variation in the flow path;

measurement control means for controlling each of the transmission/reception means, the repetition means, the time measurement means, the flow rate detection means, and the variation detection means; and

measurement monitoring means for monitoring a time signal relevant to a measurement timing of each of the transmission/reception means, the repetition means, the time measurement means, the flow rate detection means, and the variation detection means, or monitoring the number of times that the transmission/reception of the signal is repeated.

96. (NEW) A flowmeter according to claim 95, wherein the transmission/reception means transmits/receives the signal by utilizing propagation of a sonic wave as the state change of the fluid.

97. (NEW) A flowmeter according to claim 95, wherein the transmission/reception means transmits/receives the signal by utilizing propagation of heat as the state change of the fluid.

98. (NEW) A flowmeter according to claim 95, wherein:

the transmission/reception means includes a pair of vibration means for transmitting/receiving a sonic wave;

the measurement control means outputs a start signal which directs commencement of transmission of a sonic wave when a first output signal is output from the variation detection means, and outputs an end signal which directs conclusion of a repetition of transmission/reception of a sonic wave when a second output signal is output from the variation detection means; and

the measurement monitoring means monitors abnormality in measurement timings of the start signal and end signal.

99. (NEW) A flowmeter according to claim 98, wherein, at a measurement timing where the start signal is not issued within a predetermined time period after the direction of the measurement control means, the measurement monitoring means directs commencement of transmission of a sonic wave after a predetermined time has been passed.

100. (NEW) A flowmeter according to claim 98, wherein, at a measurement timing where the start signal is not issued within a predetermined time period after the direction of the measurement control means, the measurement monitoring means directs commencement of transmission of a sonic wave after a predetermined time has been passed, and directs repetition of the transmission/reception of the sonic wave for the predetermined numbers of repetition time.

101. (NEW) A flowmeter according to claim 98, wherein, at a measurement timing where the start signal is not issued within a predetermined time period after the direction of the measurement control means, the measurement monitoring means does not perform flow rate measurement until a next direction is issued by the measurement control means.

102. (NEW) A flowmeter according to claim 98, wherein, at a measurement timing where the end signal is not issued within a predetermined time period after the start signal is issued, the measurement monitoring means directs conclusion of reception of the sonic wave.

103. (NEW) A flowmeter according to claim 98, wherein, at a measurement timing where the end signal is not issued within a predetermined time period after the start signal is issued, the measurement monitoring means directs conclusion of reception of the sonic wave, and directs output of the start signal.

104. (NEW) A flowmeter according to claim 95, wherein the measurement monitoring means directs a stop in transmission/reception processing of the signal when the number of times that the transmission/reception of the signal is repeated is abnormal.

105. (NEW) A flowmeter according to claim 98, wherein the measurement monitoring means compares a first number of repetition times for measurement, where a sonic wave is transmitted from a first one of the pair of vibration means and received by the second vibration means, and a second number of repetition times for measurement, where a sonic wave is transmitted from the second vibration means and received by the first vibration means, and when the difference between the first number of repetition times and the second number of repetition times is equal to or greater than a predetermined number of times, the measurement monitoring means directs output of the start signal.

106. (NEW) A flowmeter according to claim 98, wherein a first number of repetition times for measurement where a sonic wave is transmitted from a first one of the pair of vibration means and received by the second vibration means is set so as to be equal to a second number of repetition times for measurement where a sonic wave is transmitted from the second vibration means and received by the first vibration means.

107. (NEW) A flowmeter according to claim 98, wherein the measurement monitoring means limits the number of times that the start signal is output to a predetermined number of times or less, such that the outputting of the start signal is not permanently repeated.

108. (NEW) A flowmeter according to claim 95, wherein the flow rate detection means detects a flow rate of the fluid based on a difference between inverse numbers of propagation times of the state change of the fluid when the transmission/reception of the signal is repeated.

109. (NEW) A flowmeter, comprising:

instantaneous flow rate detection means for detecting an instantaneous flow rate of fluid;

fluctuation determination means for determining whether the instantaneous flow rate of the fluid pulses or not; and

stable flow rate calculation means for calculating a stable flow rate of the fluid by using different flow rate calculation programs based on the instantaneous flow rate value measured by the instantaneous flow rate detection means according to a determination result of the fluctuation determination means.

110. (NEW) A flowmeter, comprising:

instantaneous flow rate detection means for detecting an instantaneous flow rate of fluid;

filter processing means for removing a pulse flow rate component of the instantaneous flow rate of the fluid by digital filter-processing the instantaneous flow rate of the fluid which is detected by the instantaneous flow rate detection means; and

stable flow rate calculation means for calculating a stable flow rate of the fluid based on an output from the filter processing means.

111. (NEW) A flow meter according to claim 110, further comprising fluctuation determination means for determining whether the instantaneous flow rate of the fluid pulses or not,

wherein, when the fluctuation determination means determines that the instantaneous flow rate of the fluid pulses, the stable flow rate calculation means calculates a stable flow rate of the fluid based on an output from the filter processing means.

112. (NEW) A flowmeter according to claim 109, wherein the fluctuation determination means determines whether the instantaneous flow rate of the fluid pulses or not, by determining whether or not a variation amplitude of the instantaneous flow rate of the fluid is equal to or greater than a predetermined value.

113. (NEW) A flowmeter according to claim 111, wherein the fluctuation determination means determines whether the instantaneous flow rate of the fluid pulses or not, by determining whether or not a variation amplitude of the instantaneous flow rate of the fluid is equal to or greater than a predetermined value.

114. (NEW) A flowmeter according to claim 110, wherein the filter processing means modifies a filter characteristic according to a variation amplitude of the instantaneous flow rate of the fluid.

115. (NEW) A flowmeter according to claim 110, wherein, when the instantaneous flow rate of the fluid which is detected by the instantaneous flow rate detection means is lower than a predetermined flow rate, the filter processing means removes a pulse component of the instantaneous flow rate of the fluid.

116. (NEW) A flowmeter according to claim 110, wherein the filter processing means modifies a filter characteristic according to the instantaneous flow rate of the fluid.

117. (NEW) A flowmeter according to claim 110, wherein the filter processing means modifies a filter characteristic according to an interval of measurement times of the instantaneous flow rate detection means.

118. (NEW) A flowmeter according to claim 117, wherein, when the flow rate is high, the filter processing means modifies a filter characteristic such that a cut-off frequency of the filter characteristic becomes high, and when the flow rate is low, the filter processing means modifies the filter characteristic such that the cut-off frequency of the filter characteristic becomes low.

119. (NEW) A flowmeter according to claim 110, wherein the filter processing means modifies a filter characteristic such that a variation amplitude of the stable flow rate calculated by the stable flow rate calculation means is within a predetermined value range.

120. (NEW) A flowmeter according to claim 109, wherein the instantaneous flow rate detection means detects the instantaneous flow rate by using an ultrasonic wave.

121. (NEW) A flowmeter according to claim 110, wherein the instantaneous flow rate detection means detects the instantaneous flow rate by using an ultrasonic wave.

122. (NEW) A flowmeter according to claim 109, wherein the instantaneous flow rate detection means detects the instantaneous flow rate by using heat.

123. (NEW) A flowmeter according to claim 110, wherein the instantaneous flow rate detection means detects the instantaneous flow rate by using heat.

124. (NEW) A flowmeter, comprising:
a flow rate measurement section through which fluid to be measured flows;

a pair of ultrasonic wave transducers provided in the flow rate measurement section for transmitting/receiving an ultrasonic wave;
a driver circuit for driving one of the ultrasonic wave transducers;
a reception detecting circuit connected to the other one of the ultrasonic wave transducers for detecting an ultrasonic wave pulse;
a timer for measuring a propagation time based on a receipt detection timing of the ultrasonic wave pulse;
a control section for controlling the driver circuit;
a calculation section for calculating a flow rate of the fluid to be measured based on an output from the timer; and
periodicity change means for sequentially changing a driving method of the driver circuit,
wherein the control section controls the periodicity change means such that the frequency of transmission/reception signal in flow rate measurement based on the propagation time of the ultrasonic wave pulse is sequentially changed.

125. (NEW) A flowmeter, comprising:

a flow rate measurement section through which fluid to be measured flows;
a pair of ultrasonic wave transducers provided in the flow rate measurement section for transmitting/receiving an ultrasonic wave;
a driver circuit for driving one of the ultrasonic wave transducers;
a reception detecting circuit connected to the other one of the ultrasonic wave transducers for detecting an ultrasonic wave pulse;
a control section for controlling the driver circuit for a predetermined number of times so as to drive the one of the ultrasonic wave transducers again based on an output from the reception detecting circuit;
a timer for measuring an elapsed time for the predetermined number of times;

a calculation section for calculating a flow rate of the fluid to be measured based on an output from the timer; and

periodicity change means for sequentially changing a driving method of the driver circuit,

wherein, the control section changes the driving method with the periodicity change means every time a receipt of the ultrasonic wave pulse is detected by the reception detecting circuit.

126. (NEW) A flowmeter according to claim 124, wherein:

the periodicity change means switchingly outputs a plurality of output signals having different frequencies; and

the control section changes a driving frequency of the driver circuit by changing a frequency setting of the periodicity change means at every flow rate measurement.

127. (NEW) A flowmeter according to claim 125, wherein:

the periodicity change means switchingly outputs a plurality of output signals having different frequencies; and

the control section changes a driving frequency of the driver circuit by changing a frequency setting of the periodicity change means at every flow rate measurement.

128. (NEW) A flowmeter according to claim 124, wherein:

the periodicity change means outputs output signals having the same frequency and a plurality of different phases; and

the control section changes a driving phase of the driver circuit by changing a phase setting of an output signal of the periodicity change means at every flow rate measurement.

129. (NEW) A flowmeter according to claim 125, wherein:

the periodicity change means outputs output signals having the same frequency and a plurality of different phases; and

the control section changes a driving phase of the driver circuit by changing a phase setting of an output signal of the periodicity change means at every flow rate measurement.

130. (NEW) A flowmeter according to claim 124, wherein:

the periodicity change means outputs a synthesized signal obtained by superposing a signal of a first frequency which is an operation frequency of the ultrasonic wave transducers and a signal of a second frequency which is different from the first frequency; and

the control section outputs, through the driver circuit, at every flow rate measurement, an output signal where the second frequency of the periodicity change means is changed.

131. (NEW) A flowmeter according to claim 125, wherein:

the periodicity change means outputs a synthesized signal obtained by superposing a signal of a first frequency which is an operation frequency of the ultrasonic wave transducers and a signal of a second frequency which is different from the first frequency; and

the control section outputs, through the driver circuit, at every flow rate measurement, an output signal where the second frequency of the periodicity change means is changed.

132. (NEW) A flowmeter according to claim 130, wherein the periodicity change means changes the setting between a case where there is a second frequency and a case where there is not a second frequency.

133. (NEW) A flowmeter according to claim 130, wherein the periodicity change means changes the phase setting of the second frequency.

134. (NEW) A flowmeter according to claim 130, wherein the periodicity change means changes the frequency setting of the second frequency.

135. (NEW) A flowmeter according to claim 125, wherein:
the periodicity change means includes a delay section in which different delay times can be set; and
the control section changes a delay time set in the delay section every time transmission or reception of an ultrasonic wave is detected.

136. (NEW) A flowmeter according to claim 124, wherein the width of a cycle of the frequency changed by the periodicity change means is a multiple of a value corresponding to a propagation time variation which is caused by a measurement error.

137. (NEW) A flowmeter according to claim 125, wherein the width of a cycle of the frequency changed by the periodicity change means is a multiple of a value corresponding to a propagation time variation which is caused by a measurement error.

138. (NEW) A flowmeter according to claim 124, wherein a width of a cycle of the frequency changed by the periodicity change means is equal to a cycle of a resonance frequency of the ultrasonic wave transducers.

139. (NEW) A flowmeter according to claim 125, wherein a width of a cycle of the frequency changed by the periodicity change means is equal to a cycle of a resonance frequency of the ultrasonic wave transducers.

140. (NEW) A flowmeter according to claim 124, wherein the order of patterns for changing the periodicity is the same for both measurement in an upstream direction and measurement in a downstream direction.

141. (NEW) A flowmeter according to claim 125, wherein the order of patterns for changing the periodicity is the same for both measurement in an upstream direction and measurement in a downstream direction.

142. (NEW) A flowmeter according to claim 125, wherein the predetermined number of times is a multiple of a change number of the periodicity change means.

143. (NEW) A flowmeter, comprising:

- a flow rate measurement section through which fluid to be measured flows;
- a pair of ultrasonic wave transducers provided in the flow rate measurement section for transmitting/receiving an ultrasonic wave;
- a driver circuit for driving one of the ultrasonic wave transducers;
- a reception detecting circuit connected to the other one of the ultrasonic wave transducers for detecting an ultrasonic wave pulse;
- a first timer for measuring a propagation time of the ultrasonic wave pulse;
- a second timer for measuring a time period from a time when the reception detecting circuit detects a receipt of the ultrasonic wave pulse to a time when a value of the first timer changes;
- a control section for controlling the driver circuit; and
- a calculation section for calculating a flow rate of the fluid to be measured, based on outputs from the first timer and second timer, wherein the second timer is corrected by the first timer.

144. (NEW) A flowmeter according to claim 143, further comprising a temperature sensor, wherein the second timer is corrected by the first timer when an output from the temperature sensor varies so as to be equal to or greater than a set value.

145. (NEW) A flowmeter according to claim 143, further comprising a voltage sensor, wherein the second timer is corrected by the first timer when an output from the voltage sensor varies so as to be equal to or greater than a set value.

146. (NEW) A flowmeter, comprising:

a flow rate measurement section through which fluid to be measured flows;

a pair of ultrasonic wave transducers provided in the flow rate measurement section for transmitting/receiving an ultrasonic wave;

a driver circuit for driving one of the ultrasonic wave transducers;

a reception detecting circuit connected to the other one of the ultrasonic wave transducers for detecting an ultrasonic wave pulse;

a control section for controlling the driver circuit for a predetermined number of times so as to drive the one of the ultrasonic wave transducers again based on an output from the reception detecting circuit;

a timer for measuring an elapsed time for the predetermined number of times;

a calculation section for calculating a flow rate of the fluid to be measured based on an output from the timer; and

periodicity stabilizing means for sequentially changing a driving method of the driver circuit,

wherein the control section controls the periodicity stabilizing means such that a measurement frequency is always maintained to be constant.

147. (NEW) A flowmeter according to claim 146, wherein: the periodicity stabilizing means includes a delay section in which different delay times can be set; and the control section changes an output timing of the driver circuit by switching the delay times set in the delay section.

148. (NEW) A flowmeter according to claim 146, wherein the control section controls the driver circuit such that a measurement time is maintained to be constant.

REMARKS

Applicant respectfully requests that the Examiner consider the foregoing claims contained in this amendment. No new matter is introduced by this Amendment. If the Examiner has any questions or comments regarding this Preliminary Amendment or the present application, then he or she is invited to telephone the undersigned attorney.

Respectfully submitted,

Dated: Dec. 21, 2001

By: Michael Kelly
Michael K. Kelly
Reg. No. 32,848

SNELL & WILMER, L.L.P.
One Arizona Center
400 East Van Buren Street
Phoenix, AZ 85004
Phone: (602) 382-6291
Fax: (602) 382-6070

65/pst

10/019418
JC13 Rec'd PCT/PTO 21 DEC 2001

- 1 -

P23328

DESCRIPTION

FLOWMETER

5

TECHNICAL FIELD

10 The present invention relates to a flowmeter for measuring the flow rate of liquid or air. The present invention relates to means for measuring a flow rate value in an accurate manner even when there is a variation in pressure or temperature.

BACKGROUND ART

15

20 Conventionally, such a type of flowmeter is known, for example, in Japanese Laid-Open Publication No. 9-15006. As shown in Figure 64, the flowmeter includes: a sampling program 2 for reading a measurement value, at an interval having a predetermined first sampling time, from an analog flow sensor 1 that measures the flow rate of gas; a consumed gas amount calculation program 3 for calculating the flow rate of consumed gas at a predetermined time; a mean value calculation program 4 for calculating the mean value of measurement values, which are read from the analog flow sensor at the first sampling time, at an interval of a second sampling time within a predetermined time period; a pressure variation frequency estimation program 5 for estimating the frequency of a pressure variation based on an output of the flow sensor; and a RAM 6 which functions as a memory. Herein, 25 reference numeral 7a denotes a CPU for executing the programs, and reference numeral 7b denotes a ROM for storing the programs. In such a structure, a measurement process is performed such that the predetermined measurement time 30

is equal to or longer than a single cycle of the vibration frequency of a pump or is a multiple of the cycle. Averaging is performed to suppress variation in the flow rate.

5 As another conventional example, the invention disclosed in Japanese Laid-Open Publication No. 10-197303 is known. As shown in Figure 65, the flowmeter includes: flow rate detection means 8 for detecting the flow rate; frequency detection means 9 for detecting the frequency of a variation of a flow; and measurement time set means 10 for setting the measurement time for flow rate detection to about a multiple of one cycle of the variation frequency. Herein, reference numeral 11 denotes flow rate calculation means; 12 denotes measurement start means; 13 denotes signal processing means; and 14 denotes a flow rate. With this structure, the flow rate is measured in accordance with the frequency of a variation waveform, whereby a correct flow rate measurement is achieved within a short time period.

20 As still another conventional example, the invention disclosed in Japanese Laid-Open Publication No. 11-44563 is known. As shown in Figure 66, the flowmeter includes: flow rate detection means 15 for detecting the flow rate; variation detection means 16 for detecting a variation waveform of the flow rate of fluid; pulse measurement means 17 for starting the measurement of the flow rate detection means when an alternating component of the variation waveform is in the vicinity of zero; and flow rate calculation means 18 for processing a signal from the flow rate detection means. Herein, reference numeral 19 denotes a signal processing circuit; 20 denotes a time measurement circuit; 21 denotes a trigger circuit; 22 denotes a transmission circuit; 23 denotes a comparison

circuit; 24 denotes an amplification circuit; 25 denotes a switch; 26 denotes a measurement start signal circuit; and 27 denotes start-up means; 28 denotes a flow path. In this structure, the flow rate near the average of the variation waveforms is measured, whereby a correct flow rate measurement is achieved within a short time period.

As yet another conventional example, the invention disclosed in Japanese Laid-Open Publication No. 8-271313 is known. As shown in Figure 67, whether or not a flow rate value has been detected in flow sensor measurement (29) is confirmed (30). Until a flow rate is confirmed to have been detected, the process does not proceed, and the measurement with the flow sensor is continued. Once a flow rate is found, it is determined whether or not the flow rate Q is equal to or higher than a predetermined value (31). When the flow rate Q is equal to or higher than the predetermined value, it is further determined whether or not the pressure variation surpasses a predetermined value C_f (32). When the pressure variation does not surpass a predetermined value C_f , measurement 34 is performed with a piezoelectric film sensor of a fluidic flowmeter. When the pressure variation surpasses a predetermined value C_f , it is confirmed if the pressure variation surpasses a second predetermined value (33). When the pressure variation surpasses the second predetermined value, the measurement (34) is performed with the piezoelectric film sensor of the fluidic flowmeter. When the pressure variation does not surpass the second predetermined value, the measurement (29) is performed with the flow sensor.

As shown in Figure 68, ultrasonic wave transducers 51 and 52 are provided in a flow rate

measurement section 50 so as to oppose the direction of a flow. A control section 53 starts a timer 54, and simultaneously, outputs a transmission signal to a driver circuit 55. An ultrasonic wave is transmitted from the ultrasonic wave transducer 51 which received an output of the driver circuit 55. The ultrasonic wave is received by the ultrasonic wave transducer 52. A reception detection circuit 56 which received an output of the ultrasonic wave transducer 52 detects the ultrasonic wave and stops the timer 54. By such an operation, a time (t_1) spent from a time when an ultrasonic wave is transmitted from the ultrasonic wave transducer 51 to a time when the wave is detected by the ultrasonic wave transducer 52 is measured. Next, a switching circuit 58 is operated based on a signal from the control section 53, such that the driver circuit 55 and the ultrasonic wave transducer 52 are connected, and the reception detection circuit 56 and the ultrasonic wave transducer 51 are connected. Under this state, transmission and reception of an ultrasonic wave is performed again to measure a time (t_2) spent from a time when an ultrasonic wave is transmitted from the ultrasonic wave transducer 52 to a time when the wave is detected by the ultrasonic wave transducer 51. Based on the two propagation times (t_1) and (t_2), a calculation section 57 calculates the flow rate from a difference between inverse numbers of the propagation times.

As a conventional example of this type of flowmeter, the invention disclosed in Japanese Laid-Open Publication No. 6-269528 is known.

However, in the first of the above conventional inventions, the gas flow rate is measured by using a mean

value. Therefore, measurement over a long time period is necessary in order to obtain a reliable mean value, and hence such flow rate measurement cannot be performed within a very short space of time. In the second of the above conventional inventions, measurement cannot deal with a variation in frequency. In the third and fourth conventional inventions, the method for measuring the flow rate must be changed according to the presence/absence of a pressure variation, and it is necessary to provide two means, pressure measurement means and flow rate measurement means. In the first to forth inventions, when any abnormality occurs, measurement either cannot be performed, or can be performed but with decreased accuracy.

Still further, in the above conventional structures, when receiving a signal, if noise which is in synchronization with the measurement frequency or transmission frequency of an ultrasonic wave is present, the noise is superposed on the signal always at the same phase when the propagation time is the same. The noise is counted as a measurement error, and accordingly, correct measurement cannot be performed. Moreover, when the propagation time is varied due to a variation in temperature or the like, the phase at which noise is superposed is varied, and accordingly, a measurement error is varied. As a result, a correction value cannot be stabilized. Furthermore, since the measurement resolution is determined based on the resolution of the timer 54, simply averaging the measurement values cannot increase the accuracy of measurement. Thus, it is necessary to increase the resolution of the timer 54 in order to perform measurement which requires the resolution. When the operation clock of the timer 54 is increased so as to have a high frequency, various problems occur, i.e., an

increase in current consumption, an increase in high-frequency noise, and an increase in size of circuitry. Thus, there exists an objective to increase the resolution of measurement with a timer which operates at a low frequency in order to increase the measurement accuracy.

In the fifth conventional invention, a delay means is inserted between a control section and a drive circuit, and the amount of delay is changed such that a reflected wave is avoided. In this way, an effect by the reflected wave is reduced. For example, the ultrasonic wave transducer at a receiving side is vibrated due to noise generated when the ultrasonic wave is transmitted. Thus, a variation in the signal-reception detecting time, which is caused by superposition of reverberation of this vibration on the ultrasonic wave signal, cannot be decreased.

The present invention seeks to solve the above problems. A first objective of the present invention is to set an optimum number of times that the measurement is repeated according to a variation of a flow by detecting a variation frequency using software but without using additional variation detecting device, and successively changing the number of repetition times. Further, it is sought to achieve a measurement flow rate in a reliable and accurate manner within a very short space of time even when there is a change in pressure variation and variation frequency. A second objective of the present invention is to instantaneously perform highly accurate flow-rate measurements by switching so as to detect a variation with transmission/reception means without using an additional variation detecting device and performing measurement

processing in synchronization with a variation. A third objective of the present invention is to perform highly accurate flow-rate measurement, even when any abnormality occurs in the measurement process, by quickly detecting the abnormality with measurement monitoring means and appropriately processing the measurement. A fourth objective of the present invention is to perform flow-rate measurement in a reliable and accurate manner within a very short space of time by using instantaneous flow rate measurement means and digital filter means. A fifth objective of the present invention is to measure a flow rate value with a high accuracy even when there is a variation in temperature.

DISCLOSURE OF THE INVENTION

In order to solve the above problems, a flowmeter of the present invention includes: transmission/reception means provided in a flow path for performing transmission/reception using a state change of fluid; repetition means for repeating the transmission/reception; time measurement means for measuring a time or propagation repeated by the repetition means; flow rate detection means for detecting a flow rate based on a value of the time measurement means; and number-of-times change means for changing to a predetermined number of repetition times. The number of repetition times is changed to a number suitable for a variation such that an influence of a variation of a flow can be suppressed. As a result, reliable flow rate measurement with a high accuracy can be achieved.

The flowmeter includes a pair of transmission/reception means which utilize propagation of

an ultrasonic wave as the state change of fluid. Thus, by using the sonic wave transmission/reception means, propagation of a sonic wave can be performed even when a state change occurs in the fluid. Moreover, by changing the number of repetition times to a number suitable for the variation, reliable flow rate measurement with a high accuracy can be achieved.

The flowmeter includes transmission/reception means which utilizes propagation of heat as the state change of fluid. Thus, by using the heat transmission/reception means, propagation of heat can be performed even when a state change occurs in the fluid. Moreover, by changing the number of repetition times to a number suitable for the variation, reliable flow rate measurement with a high accuracy can be achieved.

The flowmeter includes: elapsed time detection means for detecting halfway information for a propagation time which is repeatedly measured by the repetition means; frequency detection means for detecting a frequency of a flow rate variation from information of the elapsed time detection means; and number-of-times change means for setting a measurement time so as to be substantially a multiple of the frequency detected by the frequency detection means. Thus, it is not necessary to provide specific detection means. Before flow rate detection is performed, the frequency of a variation is detected from halfway information of the time measurement means, and the measurement time can be set so as to be a multiple of a cycle of the frequency. As a result, reliable flow rate measurement with a high accuracy can be achieved.

The flowmeter includes: data holding means for holding at least one or more propagation time of repeatedly-performed transmission/reception which is obtained by the elapsed time detection means; and frequency
5 detection means for detecting a frequency by comparing the data held by the data holding means and measured propagation time data. Time measurement information at each moment is held and compared by the data holding means, whereby the frequency can be detected.

10 The number-of-times change means is operated in predetermined processing. Since the number-of-times change means is operated only when predetermined processing is performed, the processing in the number-of-times change
15 means can be limited to the required minimum. Thus, the amount of consumed power can be considerably reduced.

20 The number-of-times change means is operated at each predetermined flow rate measurement. Thus, the number of repetition times is changed at every predetermined flow rate measurement, whereby the flow rate can be measured with a high accuracy in a stable manner even in a flow that varies greatly.

25 The number-of-times change means is performed before flow rate measurement processing. Since the number of repetition times is set to a predetermined number of times before flow rate measurement is performed, the flow rate measurement can be performed with a high accuracy in a
30 reliable manner.

Predetermined processing includes operations of abnormality determination means for determining

abnormality in flow rate from the measured flow rate; and flow rate management means for managing a use state for a flow rate from a measured flow rate. Since the number of repetition times is changed only when the abnormality determination processing and the flow rate management processing are performed, the processing of changing the number of repetition times is limited to the required minimum. Thus, the amount of consumed power can be decreased.

The number of repetition times which is adjusted the frequency obtained by the frequency detection means is used in next flow rate measurement. Since the number of repetition times is used in the next measurement, it is not necessary to perform repetitious measurement for frequency detection. Thus, the amount of consumed power can be decreased.

The number-of-times change means is operated when the measured flow rate is lower than a predetermined flow rate. Since the number of repetition times is changed only when the flow rate is equal to or lower than a predetermined flow rate, but this processing is not performed when the flow rate is high, the amount of consumed power can be decreased.

A flowmeter of the present invention includes: transmission/reception means provided in a flow path for performing transmission/reception using a state change of fluid; time measurement means for measuring a propagation time transmitted/received by the transmission/reception means; flow rate detection means for detecting a flow rate based on a value of the time measurement means; variation detection means for measuring a variation in the flow path

by the transmission/reception means; and measurement control means for starting measurement in synchronization with a timing of a variation of the variation detection means. Since a variation in the flow path is measured by transmission/reception means, it is not necessary to provide another sensor for detecting a variation. Thus, the size of the flowmeter can be decreased, and the structure of the flow path can be simplified. In addition, the flow rate can be measured with a high accuracy in a reliable manner within a short space of time even when a variation occurs.

The flowmeter includes a pair of transmission/reception means which utilize propagation of an ultrasonic wave as the state change of fluid. Thus, a state change of fluid can be detected by the sonic wave transmission/reception means. Accordingly, the measurement can be started in synchronization with a timing of variation. As a result, the flow rate can be measured with a high accuracy in a reliable manner.

The flowmeter includes transmission/reception means which utilizes propagation of heat as the state change of fluid. Thus, a state change of fluid can be detected by the heat transmission/reception means. Accordingly, the measurement can be started in synchronization with a timing of variation. As a result, the flow rate can be measured with a high accuracy in a reliable manner.

The flowmeter includes: first vibration means and second vibration means provided in a flow path for transmitting/receiving an sonic wave; switching means for switching an transmission/reception operation of the first vibration means and the second vibration means; variation

detection means for detecting a pressure variation in a flow path at at least one of the first vibration means and the second vibration means; time measurement means for measuring a propagation time of a sonic wave transmitted/received by the first vibration means and the second vibration means; measurement control means for performing control where, when an output of the variation detection means shows a predetermined change, the measurement means measures a first measurement time T1 of propagation from the first vibration means at an upstream side in the flow path to the second vibration means at a downstream side in the flow path, and when the output of the variation detection means shows a change opposite to the predetermined change, the measurement means measures a second measurement time T2 of propagation from the second vibration means at a downstream side in the flow path to the first vibration means at an upstream side in the flow path; flow rate detection means for calculating a flow rate using the first measurement time T1 and the second measurement time T2. Since the measurement is performed at a time when a change in a pressure variation is inverted, the phases of the pressure variation and the timing of the measurement can be shifted. As a result, a measurement error caused by a pressure variation can be offset.

The flowmeter includes: measurement control means for performing measurement control where measurement of the first measurement time T1 is started when an output of the variation detection means shows a predetermined change and measurement of the second measurement time T2 is started when the output of the variation detection means shows a change opposite to the predetermined change, and measurement control where, in a next measurement, measurement of the

first measurement time T1 is started when the output of the variation detection means shows a change opposite to the predetermined change and measurement of the second measurement time T2 is started when the output of the variation detection means shows the predetermined change; and flow rate calculation means for calculating the flow rate by successively averaging a first flow rate obtained by using the previous first measurement time T1 and previous second measurement time T2 while alternately changing start of measurement and a second flow rate obtained by using next first measurement time T1 and next second measurement time T2. Thus, the timing for measurement is changed as described above in order to perform measurement for the first measurement time T1 and the second measurement time T2. As a result, even when a pressure variation is asymmetrical between a high pressure side and a low pressure side, an influence of such a pressure variation can be offset.

The flowmeter includes repetition means for performing transmission/reception a plurality of times. Thus, averaging can be performed by increasing the number of times of measurement, and as a result, reliable flow rate measurement can be performed.

The flowmeter includes repetition means for performing transmission/reception a plurality of times over a time period which is a multiple of a variation cycle. Thus, a pressure variation can be averaged by measuring according to the variation frequency. As a result, a stable flow rate can be measured.

The flowmeter includes repetition means for starting transmission/reception measurement when an output

of the variation detection means shows a predetermined change and repeating the transmission/reception measurement with a sonic wave until the output of the variation detection means shows the same change as the predetermined change. Thus, the start and stop of the measurement can be made conformable to the frequency of a pressure variation. Therefore, a variation frequency can be measured, and a pressure variation is averaged. As a result, a stable flow rate can be measured.

The flowmeter includes selection means for switching a case where the first vibration means and second vibration means are used for transmission/reception of a sonic wave and a case where the first vibration means and second vibration means are used for detection of a pressure variation. Thus, at least one of the first vibration means and the second vibration means is used for pressure detection. As a result, both the flow rate measurement and the pressure measurement can be simultaneously achieved.

The flowmeter includes variation detection means for detecting a component of an alternating component of a variation waveform which is in the vicinity of zero. Thus, a variation is detected in the vicinity of a zero component of the variation, and hence the measurement can be started in the vicinity of zero variation within a time to perform flow rate measurement. Therefore, by performing the flow rate measurement within a time when a variation is small, the measurement can be stabilized even when a variation occurs in a fluid.

The flowmeter includes: frequency detection means for detecting the frequency of a signal of the variation

detection means; and measurement control means for starting measurement only when the frequency detected by the frequency detection means is a predetermined frequency. Thus, by starting the measurement only when the frequency is a predetermined frequency, measurement can be performed when a predetermined variation occurs. As a result, a stable flow rate can be measured.

The flowmeter includes detection cancellation means for automatically starting measurement after a predetermined time period when a signal of the variation detection means is not detected. Thus, even after a variation disappears, the flow rate can be automatically measured when a predetermined time arrives.

The transmission/reception means and the first and second vibration means include piezoelectric transducers. Thus, when the piezoelectric transducer is used, an ultrasonic wave is used for transmission/reception while a pressure variation can be detected.

A flowmeter of the present invention includes: transmission/reception means provided in a flow path for performing transmission/reception using a state change of fluid; repetition means for repeating signal propagation by the transmission/reception means; time measurement means for measuring a propagation time during repetition by the repetition means; flow rate detection means for detecting a flow rate based on a value of the time measurement means; variation detection means for detecting a fluid variation in a flow path; measurement control means for controlling each of the above means; and measurement monitoring means for monitoring abnormality in each of the above means. Thus,

when there is a variation in a flow in the flow path, the flow rate is measured according to the variation, while abnormality can be quickly detected by the measurement monitoring means. Accordingly, handling of abnormality can be correctly performed, and a measured value becomes stable. As a result, the flow rate can be measured with a high accuracy, and the reliability of the measurement can be improved.

The flowmeter includes a pair of transmission/reception means which utilize propagation of an ultrasonic wave as the state change of fluid. Since a sonic wave is used, the flow rate measurement can be performed even when there is a variation in fluid. Further, handling of abnormality can be correctly performed by the measurement monitoring means. As a result, the reliability of the measurement can be improved.

The flowmeter includes transmission/reception means which utilizes propagation of heat as the state change of fluid. Since heat propagation is used, the flow rate measurement can be performed even when there is a variation in fluid. Further, handling of abnormality can be correctly performed by the measurement monitoring means. As a result, the reliability of the measurement can be improved.

The flowmeter includes: a pair of transmission/reception means provided in a flow path for transmitting/receiving a sonic wave; repetition means for repeating signal propagation of the transmission/reception means; time measurement means for measuring a propagation time of a sonic wave during the repetition by the repetition means; flow rate detection means for detecting the flow rate based on a value of the time measurement means; variation

detection means for detecting a fluid variation in a flow path; measurement control means for controlling each of the above means; and measurement monitoring means for monitoring abnormality in a start signal which directs start of transmission of a sonic wave at a first output signal of the variation detection means after a direction signal of the measurement control means, and abnormality in an end signal which directs end of repetition of the transmission/reception of the sonic wave at second output signal of the variation detection means. Thus, when there is a variation in fluid in the flow path, the measurement can be performed in synchronization with the frequency of the variation, and abnormality can be detected by the measurement monitoring means. Therefore, a flow rate can be measured with a high accuracy, and a reliable measured value can be obtained. In addition, handling of abnormality can be correctly performed, and the reliability of the measured flow rate value can be improved.

The flowmeter includes measurement monitoring means for directing a start of transmission of a sonic wave after a predetermined time when a start signal is not generated within a predetermined time period after a direction of the measurement control means. Thus, even when there is no variation, and there is no start signal within a predetermined time period, the flow rate can be measured at every predetermined time, and loss of data can be prevented.

The flowmeter includes measurement monitoring means for directing start of transmission of a sonic wave after a predetermined time when a start signal is not generated within a predetermined time period after a direction of the

measurement control means, and for performing measurement a predetermined number of repetition times. Thus, even when there is no variation, and there is no start signal within a predetermined time period, the flow rate can be measured for a predetermined number of repetition times at every predetermined time, and loss of data can be prevented.

The flowmeter includes measurement monitoring means which does not perform measurement until a next direction of the measurement control means when a start signal is not generated within a predetermined time period after a direction of the measurement control means. By suspending the operation until a next measurement direction, unnecessary measurement is not performed, whereby the amount of consumed power can be decreased.

The flowmeter includes measurement monitoring means which terminates reception of a sonic wave when an end signal is not generated within a predetermined time after a start signal. Since the reception of the sonic wave is forcibly terminated, the measurement is not suspended while waiting for the end signal. Thus, the measurement can proceed to a next process, and a stable measurement operation can be performed.

The flowmeter includes measurement monitoring means which terminates reception of a sonic wave and outputs a start signal again, when an end signal is not generated within a predetermined time after a start signal. Since the reception of the sonic wave is forcibly terminated, the measurement is not suspended while waiting for the end signal. Further, a start signal is output again so as to perform re-measurement. Thus, a stable measurement operation can

be performed.

5 The flowmeter includes measurement monitoring means for stopping transmission/reception processing when abnormality occurs in the number of repetition times. Since the measurement is stopped when the number of repetition times is abnormal, only data with a high accuracy can be used to perform flow rate measurement.

10 The flowmeter includes measurement monitoring means which compares a first number of repetition times for measurement where a sonic wave is transmitted from a first one of the pair of transmission/reception means and received by the second transmission/reception means and a second
15 number of repetition times for measurement where a sonic wave is transmitted from the second transmission/reception means and received by the first transmission/reception means, and again outputs a start signal when the difference between the first and second numbers of repetition times is equal
20 to or greater than a predetermined number of times. Thus, re-measurement is performed when the number of repetition times is greatly different, whereby measurement with a high accuracy can be performed with a stable variation frequency.

25 The flowmeter includes repetition means for setting the number of repetition times such that a first number of repetition times for measurement where a sonic wave is transmitted from first one of the pair of
30 transmission/reception means and received by the second transmission/reception means is equal to a second number of repetition times for measurement where a sonic wave is transmitted from the second transmission/reception means and received by the first transmission/reception means.

Thus, by employing the same number of repetition times, a predetermined flow rate measurement can be performed even when a variation frequency is unstable.

5 The flowmeter includes measurement monitoring means
for monitoring the number of times that a start signal is
output again so as to be limited to a predetermined number
of times or less, such that the outputting of the start signal
is not permanently repeated. Thus, by limiting the number
10 of times of re-measurement, the processing is prevented from
continuing permanently. As a result, stable flow rate
measurement can be performed.

15 The flowmeter measures a flow rate from a difference
between inverse numbers of propagation times measured while
repeating transmission/reception of an ultrasonic wave a
plurality of number of times. Thus, when an ultrasonic wave
is used, transmission/reception can be performed without
being affected by a variation frequency in the flow path.
20 Further, the flow rate is measured from the difference of
inverse numbers of propagation times which are measured
while repeating the transmission/reception, whereby even
a variation of a long cycle can be measured by units of one
cycle. In addition, the difference of the propagation times
25 which is caused by a variation can be offset by using the
difference of inverse numbers.

30 A flowmeter of the present invention includes:
instantaneous flow rate detection means for detecting an
instantaneous flow rate; fluctuation determination means
for determining whether or not there is a pulse in a flow
rate value; and at least one or more stable flow rate
calculation means for calculating a flow rate value using

different means according to a determination result of the fluctuation determination means. Thus, by determining a variation in a measured flow rate and switching the flow rate calculation means, the flow rate can be calculated by one flow rate measurement means according to the amount of the variation in a reliable manner.

A flowmeter of the present invention includes: instantaneous flow rate detection means for detecting an instantaneous flow rate; filter processing means for performing digital-filter processing of a flow rate value; and stable flow rate calculation means for calculating a flow rate value using the filter processing means. Thus, when the digital filter processing is performed, a calculation equivalent to an averaging process can be performed without using a large number of memories for storing data. Moreover, the filter characteristic can be modified by changing one variable, i.e., a filter coefficient.

The flowmeter includes stable flow rate calculation means for calculating a stable flow rate value using the digital filter processing means when the fluctuation determination means determines that there is a pulse. Thus, when a pulse occurs, a sharp filter characteristic is selected so as to render a large pulse stable, and the filter processing can be performed only when a pulse occurs.

The fluctuation determination means determines whether or not a variation amplitude of a flow rate value is equal to or greater than a predetermined value. Thus, a pulse can be determined based on the variation amplitude of the pulse, whereby the filter processing can be modified

according to the variation amplitude of the pulse.

5 The filter processing means modifies a filter
characteristic according to a variation amplitude of a flow
rate value. Since the filter characteristic is changed
according to the variation amplitude of a flow rate value,
the filter characteristic can be quickly modified so as to
be a sufficiently relaxed filter characteristic that allows
a variation according to a variation in a flow rate when
10 the variation is small, and when the variation is large,
a sharp filter characteristic is selected such that a
variation of the flow rate due to a pulse can be significantly
suppressed.

15 The filter processing is performed only when a flow
rate value detected by the instantaneous flow rate detection
means is low. Since the filter processing is performed only
when the flow rate is low, a variation of the flow rate can
be quickly handled when the flow rate is high, and an
20 influence of fluctuation which is caused when the flow rate
is low can be significantly suppressed.

25 Filter processing means modifies a filter
characteristic according to a flow rate value. Since the
filter characteristic is changed according to the flow rate
value, filter processing is performed only when the flow
rate is low, a variation of the flow rate can be quickly
handled when the flow rate is high, and an influence of
fluctuation which is caused when the flow rate is low can
30 be significantly suppressed.

Filter processing means modifies a filter
characteristic according to an interval of a flow rate time

of the instantaneous flow rate detection means. Thus, by changing the filter characteristic according to an interval of the flow rate detection time, the variation can be suppressed with a relaxed filter characteristic when the measurement interval is short or with a sharp filter characteristic when the measurement interval is long.

The flowmeter includes filter processing means which modifies a filter characteristic such that a cut-off frequency of the filter characteristic becomes high when the flow rate is high, and which modifies a filter characteristic such that the filter characteristic has a low cut-off frequency when the flow rate is low. Thus, the response characteristic is increased when the flow rate is high, and the fluctuation is suppressed when the flow rate is low.

A filter characteristic is modified such that a variation amplitude of a flow rate value calculated by the stable flow rate calculation means is within a predetermined value range. Since the filter characteristic is modified such that the variation amplitude is within a predetermined value range, the flow rate variation can be suppressed so as to be always equal to or smaller than a predetermined value.

An ultrasonic wave flowmeter which detects a flow rate by using an ultrasonic wave is used as the instantaneous flow rate detection means. Thus, by using an ultrasonic wave flowmeter, an instantaneous flow rate can be measured even when a large flow rate variation occurs. Thus, from the flow rate value, a stable flow rate can be calculated.

A heat-based flowmeter is used as the instantaneous flow rate detection means. When the heat-based flowmeter is used, an instantaneous flow rate can be measured even when a large flow rate variation occurs. Thus, a stable flow rate can be calculated from the flow rate value.

A flowmeter of the present invention includes: a flow rate measurement section through which fluid to be measured flows; a pair of ultrasonic wave transducers provided in the flow rate measurement section for transmitting/receiving an ultrasonic wave; a driver circuit for driving one of the ultrasonic wave transducers; a reception detecting circuit connected to the other ultrasonic wave transducer for detecting an ultrasonic wave signal; a timer for measuring a propagation time of the ultrasonic wave signal; a control section for controlling the driver circuit; a calculation section for calculating a flow rate from an output of the timer; and periodicity change means for sequentially changing a driving method of the driver circuit, wherein the control section controls the periodicity change means such that the frequency of flow rate measurement is sequentially changed in order to prevent the frequency of the measurement from being constant. Thus, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

A flowmeter of the present invention includes: a flow rate measurement section through which fluid to be measured flows; a pair of ultrasonic wave transducers provided in the flow rate measurement section for

transmitting/receiving an ultrasonic wave; a driver circuit
for driving one of the ultrasonic wave transducers; a
reception detecting circuit connected to the other
ultrasonic wave transducer for detecting an ultrasonic wave
5 signal; a control section for controlling the driver circuit
for a predetermined number of times so as to drive the
ultrasonic wave transducers again in response to an output
of the reception detecting circuit; a timer for measuring
an elapsed time for the predetermined number of times; a
10 calculation section for calculating a flow rate from an
output of the timer; and periodicity change means for
sequentially changing a driving method of the driver circuit,
wherein, in response to receipt of an output of the reception
detecting circuit, the control section changes the
15 periodicity change means at every receipt detection of the
reception detecting circuit such that the frequency is not
kept constant. Thus, the periodicity change means can be
operated with a plurality of settings for measurement within
one flow rate measurement cycle. As a result, noise is
20 dispersively averaged in a measurement result, and a
reliable measurement result can be obtained.

The periodicity change means switchingly outputs a
plurality of output signals having different frequencies;
25 and the control section changes a frequency setting of the
periodicity change means at every measurement so as to change
a driving frequency of the driver circuit. Thus, by changing
the driving frequency, the reception detecting timing can
be changed by a time corresponding to a frequency variation
30 of a driving signal. Thus, noise which is in synchronization
with a measurement frequency or a transmission frequency
of an ultrasonic wave is never in the same phase but dispersed
when the ultrasonic wave is received. Therefore, a

measurement error can be decreased.

5 The periodicity change means outputs output signals
having the same frequency and a plurality of different
phases; and the control section operates such that a phase
10 setting for the output signal of the periodicity change means
is changed at every measurement and a driving phase of the
driver circuit is changed. Thus, by changing the driving
phase, the reception detecting timing can be changed by a
time corresponding to a phase variation of a driving signal.
15 Thus, noise which is in synchronization with a measurement
frequency or a transmission frequency of an ultrasonic wave
is never in the same phase but dispersed when the ultrasonic
wave is received. Therefore, a measurement error can be
decreased.

20 The frequency change means outputs a synthesized
signal obtained by superposing a signal of a first frequency
which is an operation frequency of the ultrasonic wave
transducers and a signal of a second frequency which is
different from the first frequency; and the control section
25 outputs, through the driver circuit, at every measurement,
an output signal where the second frequency of the
periodicity change means is changed. Thus, the periodicity
of the flow rate measurement can be disturbed. As a result,
noise which is in synchronization with a measurement
30 frequency or a transmission frequency of an ultrasonic wave
is never in the same phase but dispersed when the ultrasonic
wave is received. Therefore, a measurement error can be
decreased.

 The periodicity change means switches the setting
between a case where there is a second frequency and a case

where there is not a second frequency. Thus, since the reception detecting timing is changed by changing the vibration of the ultrasonic wave transducer that transmits an ultrasonic wave, the periodicity of the flow rate measurement can be disturbed. As a result, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

The periodicity change means changes the phase setting of the second frequency. Thus, since the reception detecting timing is changed by changing the vibration of the ultrasonic wave transducer that transmits an ultrasonic wave, the periodicity of the flow rate measurement can be disturbed. As a result, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed/averaged when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

The periodicity change means changes the frequency setting of the second frequency. Thus, since the reception detecting timing is changed by changing the vibration of the ultrasonic wave transducer that transmits an ultrasonic wave, the periodicity of the flow rate measurement can be disturbed. As a result, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

The periodicity change means includes a delay

section capable of setting different delay times; and the control section changes the setting of the delay at each transmission of an ultrasonic wave or at each receipt detection of an ultrasonic wave. Thus, in one measurement operation, reverberation of an ultrasonic wave transmitted in an immediately-previous measurement and an influence of tailing of the ultrasonic wave transducers can be dispersed, whereby a measurement error can be decreased.

The cycle width changed by the periodicity change means is a multiple of a value corresponding to a variation of a propagation time which is caused by a measurement error. Thus, when the measured values for all the settings are summed up and averaged, an error can be suppressed to a minimum.

The cycle width changed by the periodicity change means is equal to a cycle of a resonance frequency of the ultrasonic wave transducers. Thus, in a value obtained by summing up and averaging the measured values for all the settings, a measurement error which may be caused by reverberation of an ultrasonic wave or tailing of the ultrasonic wave transducers is minimum. Thus, the measurement error can be decreased.

The order of patterns for changing the periodicity is the same for both measurement in a upstream direction and measurement in a downstream direction. Thus, the measurement with an ultrasonic wave transmitted toward the upstream side and the measurement with an ultrasonic wave transmitted toward the downstream side are always performed under the same conditions. Hence, even when there is a variation in the flow rate, a reliable measurement result

can be obtained.

5 The predetermined number of times is a multiple of
a change number of the periodicity change means. Thus, all
the setting values of the periodicity change means are
uniformly set within a single flow rate measurement
operation. As a result, a reliable measurement result can
be obtained.

10 A flowmeter of the present invention includes: a
flow rate measurement section through which fluid to be
measured flows; a pair of ultrasonic wave transducers
provided in the flow rate measurement section for
transmitting/receiving an ultrasonic wave; a driver circuit
15 for driving one of the ultrasonic wave transducers; a
reception detecting circuit connected to the other
ultrasonic wave transducer for detecting an ultrasonic wave
signal; a first timer for measuring a propagation time of
the ultrasonic wave signal; a second timer for measuring
20 a time period from when the reception detecting circuit
detects a receipt to when a value of the first timer changes;
a control section for controlling the driver circuit; and
a calculation section for calculating a flow rate from
outputs of the first timer and second timer, wherein the
25 second timer is corrected by the first timer. Since the flow
rate calculation is performed using a value obtained by
subtracting a value of the second timer from a value of the
first timer, the time measurement resolution is equal to
that of the second timer. Further, since the operation time
30 of the second timer is very short, the amount of consumed
power can be decreased. Thus, a flowmeter with high
resolution which consumes a small amount of power can be
realized. Furthermore, a correct flow rate measurement can

be achieved so long as the second timer operates in a stable manner after the correction is made until flow rate measurement is performed. Therefore, a correct measurement can be performed even when the second timer lacks long-term stability. Thus, a flowmeter with a high accuracy can be realized with ordinarily-employed parts.

The flowmeter includes a temperature sensor, wherein the second timer is corrected by the first timer when an output of the temperature sensor varies so as to be equal to or greater than a set value. Thus, even when the second timer has a characteristic which varies according to a variation in the temperature, the second timer is corrected every time a temperature variation occurs, whereby correct measurement can be performed. Furthermore, such a correction is made only when it is necessary, the amount of consumed power can be decreased.

The flowmeter includes a voltage sensor for detecting the power supply voltage of the circuit, wherein the second timer is corrected by the first timer when an output of the voltage sensor varies so as to be equal to or greater than a set value. Thus, even when the second timer has a characteristic which varies according to a variation in the power supply voltage, the second timer is corrected every time a variation occurs in the power supply voltage, whereby correct measurement can be performed. Furthermore, it is not necessary to periodically make a correction, the amount of consumed power can be decreased.

A flowmeter of the present invention includes: a flow rate measurement section through which fluid to be measured flows; a pair of ultrasonic wave transducers

provided in the flow rate measurement section for transmitting/receiving an ultrasonic wave; a driver circuit for driving one of the ultrasonic wave transducers; a reception detecting circuit connected to the other
5 ultrasonic wave transducer for detecting an ultrasonic wave signal; a control section for controlling the driver circuit for a predetermined number of times so as to drive the ultrasonic wave transducers again in response to an output of the reception detecting circuit; a timer for measuring
10 an elapsed time for the predetermined number of times; a calculation section for calculating a flow rate from an output of the timer; and periodicity stabilizing means for sequentially changing a driving method of the driver circuit, wherein the control section controls the periodicity
15 stabilizing means such that a measurement frequency is always maintained to be constant. With this structure, the measurement frequency is always constant even when a propagation time varies. Thus, noise which is in synchronization with a measurement frequency or a
20 transmission frequency of an ultrasonic wave is always in the same phase when the ultrasonic wave is received regardless of a variation in the propagation time. Therefore, a measurement error can be maintained as a constant value. Accordingly, the flow rate measurement can
25 be stabilized even when the noise has a very long periodic noise.

The control section includes periodicity stabilizing means formed by a delay section capable of
30 setting different delay times; and the control section changes an output timing of the driver circuit by switching the delay times. Since the measurement frequency is maintained to be constant by changing the delay time, the

measurement frequency can be stabilized without giving an influence to driving of the ultrasonic wave transducers.

5 The control section controls the driver circuit such that a measurement time is maintained to be constant. Thus, the measurement frequency can be maintained to be constant with a simple calculation without calculating a propagation time for each ultrasonic wave transmission.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram showing a flowmeter according to embodiment 1 of the present invention.

15 Figure 2 is a timing chart illustrating an operation of the flowmeter of embodiment 1.

Figure 3 is a variation waveform graph for illustrating the operation of the flowmeter of embodiment 1.

20 Figure 4 is a flowchart showing an operation of the flowmeter of embodiment 1.

25 Figure 5 is a flowchart showing an operation of the flowmeter of embodiment 1.

Figure 6 is a flowchart showing an operation of a flowmeter according to embodiment 2 of the present invention.

30 Figure 7 is a block diagram showing a flowmeter according to embodiment 3 of the present invention.

Figure 8 is a flowchart showing an operation of the flowmeter of embodiment 3.

5 Figure 9 is another flowchart showing an operation of the flowmeter of embodiment 3.

Figure 10 is a block diagram showing a flowmeter according to embodiment 4 of the present invention.

10 Figure 11 is a flowchart showing an operation of the flowmeter of embodiment 4.

Figure 12 is a block diagram showing a flowmeter according to embodiment 5 of the present invention.

15 Figure 13 is a block diagram showing a flowmeter according to embodiment 6 of the present invention.

20 Figure 14 is a structure diagram of the flowmeter of embodiment 6.

Figure 15 is a timing chart showing an operation of the flowmeter of embodiment 6.

25 Figure 16 is another timing chart showing an operation of the flowmeter of embodiment 6.

Figure 17 is a flowchart showing an operation of the flowmeter of embodiment 6.

30 Figure 18 is another flowchart showing an operation of the flowmeter of embodiment 6.

Figure 19 is another block diagram of the flowmeter of embodiment 6.

5 Figure 20 is a timing chart showing an operation of a flowmeter according to embodiment 7 of the present invention.

10 Figure 21 is a flowchart showing an operation of the flowmeter according to embodiment 7.

Figure 22 is a timing chart showing an operation of a flowmeter of embodiment 8 of the present invention.

15 Figure 23 is a flowchart showing an operation of the flowmeter according to embodiment 8.

Figure 24 is a block diagram showing a flowmeter according to embodiment 9 of the present invention.

20 Figure 25 is a timing chart showing an operation of the flowmeter according to embodiment 9.

25 Figure 26 is a block diagram showing a flowmeter according to embodiment 10 of the present invention.

Figure 27 is a flowchart showing an operation of the flowmeter according to embodiment 10.

30 Figure 28 is a timing chart showing an operation of a flowmeter of embodiment 11 of the present invention.

Figure 29 is a timing chart showing an operation of a flowmeter of embodiment 12 of the present invention.

Figure 30 is a timing chart showing an operation of the flowmeter of embodiment 12.

5 Figure 31 is another timing chart showing an operation of the flowmeter of embodiment 12.

10 Figure 32 is a timing chart showing an operation of a flowmeter of embodiment 13 of the present invention.

15 Figure 33 is a timing chart showing an operation of a flowmeter of embodiment 14 of the present invention.

20 Figure 34 is a flowchart showing an operation of a flowmeter of embodiment 15 of the present invention.

25 Figure 35 is a flowchart showing an operation of a flowmeter of embodiment 16 of the present invention.

30 Figure 36 is a flowchart showing an operation of a flowmeter of embodiment 17 of the present invention.

 Figure 37 is a flowchart showing an operation of a flowmeter of embodiment 18 of the present invention.

 Figure 38 is a flowchart showing an operation of a flowmeter of embodiment 19 of the present invention.

 Figure 39 is a flowchart showing an operation of a flowmeter of embodiment 20 of the present invention.

 Figure 40 is a flowchart showing an operation of a flowmeter of embodiment 21 of the present invention.

Figure 41 is a block diagram showing a flowmeter according to embodiment 22 of the present invention.

5 Figure 42 is a block diagram showing a flowmeter according to embodiment 23 of the present invention.

10 Figure 43 is a flowchart showing an operation of the flowmeter according to embodiment 23.

15 Figure 44 is a flowchart showing a digital filter processing of the flowmeter of embodiment 23.

20 Figure 45 is a filter characteristic graph for illustrating an operation of the flowmeter of embodiment 23.

25 Figure 46 is a flowchart showing an operation of a flowmeter of embodiment 24 of the present invention.

30 Figure 47 is a flowchart showing an operation of a flowmeter of embodiment 25 of the present invention.

 Figure 48 is a flowchart showing an operation of a flowmeter of embodiment 26 of the present invention.

 Figure 49 is a flowchart showing an operation of a flowmeter of embodiment 27 of the present invention.

 Figure 50 is a flowchart showing an operation of a flowmeter of embodiment 28 of the present invention.

 Figure 51 is a block diagram showing a flowmeter according to embodiment 29 of the present invention.

Figure 52 is a block diagram showing a flowmeter according to embodiment 30 of the present invention.

5 Figure 53 is a block diagram of periodicity change means of the flowmeter of embodiment 30.

10 Figure 54 is a timing chart for showing a reception detection timing of the flowmeter of embodiment 30.

Figure 55 is a block diagram showing a flowmeter according to embodiment 31 of the present invention.

15 Figure 56 is a block diagram of periodicity change means of the flowmeter of embodiment 31.

20 Figure 57A is a block diagram of periodicity change means of the flowmeter of embodiment 32 of the present invention.

Figure 57B is a timing chart for showing a reception detection timing of the flowmeter of embodiment 32.

25 Figure 58 is a block diagram of periodicity change means of the flowmeter of embodiment 33 of the present invention.

30 Figure 59 is a block diagram of periodicity change means of the flowmeter of embodiment 34 of the present invention.

Figure 60 is a block diagram of periodicity change means of the flowmeter of embodiment 35 of the present

invention.

Figure 61 is a block diagram showing a flowmeter according to embodiment 36 of the present invention.

5

Figure 62 is a diagram showing operations of a first timer and a second timer according to embodiment 36 of the present invention.

10

Figure 63 is a block diagram showing a flowmeter according to embodiment 37 of the present invention.

Figure 64 is a block diagram showing a conventional flowmeter.

15

Figure 65 is a block diagram showing another conventional flowmeter.

20

Figure 66 is a block diagram showing still another conventional flowmeter.

Figure 67 is a flowchart showing an operation of still another conventional flowmeter.

25

Figure 68 is a block diagram showing a conventional flowmeter.

BEST MODE FOR CARRYING OUT THE INVENTION

30

Hereinafter, embodiments of the present invention will be described with reference to the drawings.

(Embodiment 1)

Figure 1 is a block diagram showing a flowmeter according to embodiment 1 of the present invention. In Figure 1, reference numeral 117 is first transmission/reception means which is provided in a flow path 116 and which functions as transmission/reception means for transmitting/receiving a signal by using propagation of a sonic wave as a state change in a fluid. Reference numeral 118 is second transmission/reception means as transmission/reception means. Reference numeral 119 is repetition means for repeating signal propagation between the first transmission/reception means 117 and the second transmission/reception means 118. Reference numeral 120 is time measurement means for measuring a propagation time of a sonic wave propagated during the repetition in the repetition means 119. Reference numeral 121 is flow rate detection means for detecting the flow rate based on a value from the time measurement means 120. Reference numeral 122 is number-of-times change means for successively making a change to a predetermined number of repetition times. Furthermore, an elapsed time detection means 123 for detecting halfway information concerning the propagation time of propagation repeated in the repetition section 119, frequency detection means 124 for detecting the frequency of a variation in flow rate from the information of the elapsed time detection means 123, and number-of-times change means 122 for making a change to a setting such that the measurement time is substantially a multiple of one cycle of the frequency detected in the frequency detection means 124, are included. Herein, data stored in data holding means 125 holds one propagation time of transmission/reception which has been obtained by elapsed time detection means 123. The

frequency is detected by the frequency detection means 124 by comparing data held by the data holding means 125 with data of a measured propagation time. Reference numeral 126 is switching means for switching operations of transmission/reception between the first transducer 117 and the second transducer 118. Reference numeral 127 is a transmitter for transmitting an ultrasonic signal. Reference numeral 128 is a receiver for receiving an ultrasonic signal.

10

Next, an operation and function of the flowmeter are described with reference to Figures 2 through 5. As shown in Figure 2, in a flowmeter of the present invention, measurement begins in response to a repetition start signal. An input signal is input to the first transducer, and the first transducer vibrates to transmit a sonic wave. The sonic wave is received by the second transducer. The propagation time of the sonic signal is measured by the time measurement means based on a predetermined clock count. The delay time in the drawing is a fixed waiting time which is provided for waiting for attenuation of the sound wave. After detecting a counted value of the delay time and propagation time as C_1 , an input signal is again input to the first transducer to transmit a sonic wave, and the sonic wave is received by the second transducer. This repetitive measurement is performed a predetermined number of times. The count number received by the second transducer, C_{i+1} , is compared with the previous count number C_i , so as to detect the frequency of repetitively occurring flow rate variation. For example, as shown in Figure 3, comparing points V5 and V6 of the flow rate variation, the difference between the count numbers, $C_5 - C_6$, is a negative value. However, comparing points V6 and V7 of the flow rate variation, the

15

20

25

30

difference between the count numbers, $C_6 - C_7$, is a positive value. That is, the sign is inverted. Then, again, the time when the difference between the count values, $C_i - C_{i+1}$, changes from a negative value to a positive value is determined for each repetition according to the processing shown in the flowchart of Figure 4, whereby the frequency is detected.

The flowchart of Figure 4 shows a flow of frequency detection. Specifically, Figure 4 shows that one time measurement counter is held for comparison with the next time measurement counter, whereby a change in a flow rate variation is detected. Furthermore, as shown in Figure 5, the processing ① and number-of-times change means are performed before every flow rate measurement. In this way, the frequency is detected, and in that cycle, measurement of a propagation time is repeatedly performed. Hence, the flow rate is measured without being affected by a variation because the measured flow rate is averaged by measuring at an interval of one cycle of the variation even when there is a variation in the flow. When measurement is performed not only within one cycle but also over a plurality of cycles, the flow rate measurement can be performed with a high accuracy in a more reliable manner.

The method for detecting the frequency by use of an inversion of the sign of the difference between the count values has been described. However, detection of the frequency may be achieved by detecting a point at which the difference is maximum, or by detecting a point at which a count value nearest to the held count value is counted again. Further, the detection method which utilizes a comparison with one held data has been described. However, the frequency may be detected by using an auto-correlation or

frequency analysis method with a plurality of held data, or by obtaining a difference among a plurality of held data as described above.

5 Thus, the flowmeter does not require means for detecting a variation in a flow, i.e., the structure thereof can be simplified. The frequency is detected from the halfway information of the time measurement means before the flow rate detection is performed such that the time for
10 the repetitive measurement is a multiple of one cycle of the variation frequency. Therefore, the flow rate measurement can be performed with a high accuracy in a reliable manner. Time measurement information at each moment is held and compared by the data holding means,
15 whereby the frequency can be detected at each occasion. Furthermore, by successively changing the number of repetition times, an influence caused due to a change in a variation of a flow can be suppressed, hence a reliable flow rate measurement can be achieved. Still further, the
20 number of repetition times is set so as to be a multiple of one cycle of the variation frequency before the flow rate measurement is performed. Thus, a variation in a flow is averaged, and as a result, the flow rate measurement can be performed with a high accuracy in a reliable manner.

25

(Embodiment 2)

Figure 6 is a flowchart showing an operation of a flowmeter according to embodiment 2 of the present invention. Embodiment 2 is different from embodiment 1 in that the
30 process of embodiment 2 is structured such that the number of repetition times which is determined according to a frequency obtained by the frequency detection means is used in the next flow rate measurement. The structure of the

flowmeter in embodiment 2 is the same as that shown in Figure 1.

As shown in Figure 6, measurement of propagation time T1 of an ultrasonic wave propagating from the first transducer is performed, while time measurement information C₁ of the measurement means at that time is held in the data holding means. Measurement of propagation time T2 of an ultrasonic wave propagating from the second transducer is then performed, and the flow velocity and flow rate are calculated from times T1 and T2. Then, the frequency of a flow variation is detected from the held time measurement information C₁ by using a method described in embodiment 1, and the number of repetition times for the next measurement is changed such that the detected frequency is reflected in the next measurement.

In this way, the detected frequency of a flow variation is used in the next measurement, whereby the flow rate measurement and the frequency can be simultaneously performed. It is not necessary to perform repetitive measurement of sonic wave propagation only for detecting the variation frequency, and accordingly, the current consumption can be decreased. The number of repetition times can be set according to the variation frequency, so that the variation is averaged, and the flow rate can be measured with a high accuracy in a reliable manner.

(Embodiment 3)

Figure 7 is a block diagram of a flowmeter according to embodiment 3 of the present invention. Embodiment 3 is different from embodiment 1 in that the flowmeter of embodiment 3 includes: flow rate variation identification

means 129 to determine the magnitude of a flow rate variation detected by the flow rate detection means 121; and number-of-times change means 122 for changing the number of repetition times such that the flow rate variation identified by the flow rate variation identification means 129 is decreased, and that the flow rate variation identification means 129 operates using a standard deviation of the flow rate.

10 As shown in the flowchart of Figure 8, the flow rate Q_i is first measured. When the flow rate is equal to or higher than a predetermined value Q_m (for example, 100 liter/hour), the number of repetition times is kept unchanged. When the flow rate is lower than a predetermined value Q_m , standard deviation H_i is obtained based on
15 n pieces of data before the measured flow rate Q_i . When the standard deviation H_i is equal to or greater than a predetermined value H_m (for example, 1 liter/hour), the number of repetition times is changed. At this time, the
20 number of repetition times is changed (increased) from an initial value K_0 by a predetermined value dK (for example, two times). When the number of repetition times is equal to or greater than a predetermined number of times, K_m , the number of repetition times is reset to the initial value
25 and changed again from the first.

 In this way, only when the measured flow rate is lower than a predetermined flow rate, the number of repetition times is changed, whereby the process is stopped when the
30 flow rate is high, and accordingly, the consumed power is decreased. When the standard deviation is equal to or greater than a predetermined value, the number of repetition times is changed such that the flow rate variation becomes

small, whereby the flow rate measurement can be achieved with a high accuracy in a reliable manner even when there is a variation in a flow. A flow rate variation is identified by using the standard deviation, whereby a variation can be correctly detected. Further, the number of repetition times is gradually changed in an incremental manner, whereby the necessary number of repetition times can be determined because the repetition number can be examined from a small number of times.

As shown in Figure 9, only when the measure flow rate is equal to or lower than a predetermined flow rate, and the standard deviation is equal to or higher than a predetermined value, the number-of-repetition-times change means operates, so that the number of times that the operation of changing the number of times is performed is further restricted, and accordingly, the consumed power can be decreased.

In the above-described method, the number of times is changed in a gradual incremental manner. However, if the standard deviation when the number of times is changed is increased, the number of times may be decrementally changed. In such a case, when the direction of change of the number of times, i.e., increment or decrement, is controlled according to a variation of the standard deviation, measurement can be performed in a more reliable manner. Further, when an electric battery cell is used as the power source of the flowmeter, the consumed power is decreased, and accordingly, the flowmeter can be used over a long time period.

(Embodiment 4)

Figure 10 is a block diagram of a flowmeter according to embodiment 4 of the present invention. Embodiment 4 is different from embodiment 1 in that the flowmeter of embodiment 4 includes abnormality identification means 130 and flow rate management means 131. The number-of-times change means operates during the execution of processing in the abnormality identification means 130 as predetermined processing and during the execution of processing in the flow rate management means 131.

As in the flowchart shown in Figure 11, the number of repetition times is changed during the execution of the processing in the abnormality identification means, and during the execution of processing in the flow rate management means. The number of repetition times can be changed only when it is necessary, so that the consumed power can be decreased. That is, in consideration of an urgency of executing abnormality identification, the flow rate should be measured within a short space of time. In a flow rate measurement method which is executed in accordance with a variation in a flow, abnormality identification is slow. When the number of repetition times is changed in accordance with the variation frequency before performing measurement, the measurement can be achieved within a short space of time. Furthermore, the flow rate management is performed for managing what load is used in the downstream side. It is necessary to detect and identify the flow rate within a short space of time. Similar to abnormality identification, the number of repetition times is changed so as to conform to the variation frequency before performing measurement, whereby the measurement can be achieved within a short space

of time.

(Embodiment 5)

5 Figure 12 is a block diagram of a flowmeter
according to embodiment 5 of the present invention.
Embodiment 5 is different from embodiment 1 in that the
transmission/reception means utilizes propagation of heat
for detecting a change in the state of fluid. Reference
numeral 132 denotes a heater for emitting heat, and
10 reference numeral 133 denotes a temperature sensor for
receiving the heat.

Also in the case where the transmission means and
the reception means utilize heat, the variation frequency
15 can be detected from the variation in a heat propagation
time, and accordingly, the structure can be simplified.
Further, the times to perform repetitive measurement can
be changed. When the number of repetition times is a
multiple of one cycle of the variation frequency, the flow
20 rate measurement can be performed with a high accuracy in
a reliable manner. Furthermore, the number of times of
successive repetition can be changed according to a change
in a flow variation, and an influence of variation can be
quickly suppressed, whereby the flow rate measurement can
25 be performed in a reliable manner. Further still,
immediately before performing flow rate measurement, the
number of repetition times is set to a multiple of one cycle
of the variation frequency, and accordingly, a variation
of a flow is averaged, so that the flow rate measurement
30 can be performed with a high accuracy in a reliable manner.

(Embodiment 6)

Figure 13 is a block diagram showing a flowmeter

according to embodiment 6 of the present invention. In Figure 13, reference numeral 223 denotes a first piezoelectric transducer, which is first vibration means of transmission/reception means that is provided in a flow path 224 and that performs transmission/reception using an ultrasonic wave as a state change of fluid. Reference numeral 225 denotes a second piezoelectric transducer, which is second vibration means of transmission/reception means that performs transmission/reception of an ultrasonic wave. Reference numeral 226 denotes a switch (switching means) for switching a transmission/reception operation of the first piezoelectric transducer and the second piezoelectric transducer. Reference numeral 227 denotes time measurement means for measuring by a sing-around method a propagation time of a sonic wave repeatedly transmitted/received between the first piezoelectric transducer 223 and the second piezoelectric transducer 225. Reference numeral 228 denotes flow rate detection means for detecting the flow rate based on a value of the time measurement means. Reference numeral 229 denotes variation detection means for measuring a pressure variation in the flow path by using the first piezoelectric transducer 223 and the second piezoelectric transducer 225. Reference numeral 230 denotes measurement control means for starting measurement in synchronization with a timing of the pressure variation detected by the variation detection means.

The measurement control means 230 performs measurement control such that measurement of a first measurement time T1 is started at a rising edge of an output of the variation detection means 229, and measurement of a second measurement time T2 is started at a falling edge

of the output of the variation detection means 229. The measurement control means 230 performs measurement start control such that, for the next measurement, measurement of a first measurement time T1 is performed at a falling edge of the output of the variation detection means, and measurement of a second measurement time T2 is performed at a rising edge of the output of the variation detection means. The flow rate measurement means 228 calculates the flow rate by successively averaging the first flow rate obtained using the previous first measurement time T1 and the second measurement time T2, while alternately changing the start of measurement, with the second flow rate obtained using the next first measurement time T1 and the second measurement time T2. Reference numeral 231 denotes a selection switch as selection means for switching between a transmission/reception operation of an ultrasonic wave by using the second piezoelectric transducer and a pressure variation detection operation. Reference numeral 232 denotes a transmitter of an ultrasonic signal. Reference numeral 233 denotes a receiver of an ultrasonic signal. Reference numeral 234 denotes repetition means for performing a sing-around measurement. Reference numeral 235 denotes operation check means for checking the operations of the first piezoelectric transducer and the second piezoelectric transducer.

Next, an operation and function are described with reference to Figures 14 through 19. In a flow path having a structure shown in Figure 14, propagation time T1 of an ultrasonic wave from the first piezoelectric transducer 223 to the second piezoelectric transducer 225 is $T1 = L/(C+V\cos\theta)$. Propagation time T2 of an ultrasonic wave from the second piezoelectric transducer 225 to the first

piezoelectric transducer 223 is $T_2 = L/(C-V\cos\theta)$. Herein, V denotes a flow velocity in the flow path, C denotes acoustic velocity, and θ denotes an angle of inclination. With the difference of inverse numbers of T_1 and T_2 , the flow velocity V is obtained from T_1 and T_2 as shown in the following expression:

$$\begin{aligned} 1/T_1 - 1/T_2 &= 2V\cos\theta/L \\ V &= (L/2\cos\theta) \cdot (1/T_1 - 1/T_2) \end{aligned}$$

If there is a pressure variation in the flow path, the flow velocity changes according to the pressure variation. Thus, T_1 and T_2 are expressed as follows:

$$\begin{aligned} T_1 &= L/(C+V\cos\theta+u \cdot \sin(2\pi ft)) \\ T_2 &= L/(C-V\cos\theta-u \cdot \sin(2\pi ft+\psi)) \end{aligned}$$

where f denotes variation frequency, u denotes variation flow velocity, and ψ denotes a difference between a start time of T_1 measurement and a start time of T_2 measurement (phase difference). The difference between the inverse numbers of T_1 and T_2 is expressed as follows:

$$\begin{aligned} 1/T_1 - 1/T_2 \\ = (2V\cos\theta + u \cdot (\sin(2\pi ft) + \sin(2\pi ft + \psi))) / L \end{aligned}$$

When $\psi = \pi$, $\sin(2\pi ft + \psi) = -\sin(2\pi ft)$. That is, an influence of the variation is cancelled. Thus,

$$V = (L/2\cos\theta) \cdot (1/T_1 - 1/T_2)$$

That is, the flow velocity V can be measured when there is a variation, and the flow rate can be measured in

consideration of the cross-sectional area of the flow path. In the above example, the measurement based on a single transmission/reception operation has been described. However, in the case where the integrated time is obtained by a sing-around method where the propagation time is repeatedly measured by the repetition means 234, T1 and T2 can be expressed similarly as shown in the following expressions:

$$\begin{aligned} T1 &= \Sigma [L / (C + V \cos \theta + u \cdot \sin(2\pi f t i))] \\ &= \Sigma L / (\Sigma (C + V \cos \theta) + \Sigma (u \cdot \sin(2\pi f t i))) \\ T2 &= \Sigma [L / (C - V \cos \theta - u \cdot \sin(2\pi f t i + \psi))] \\ &= \Sigma L / (\Sigma (C - V \cos \theta) - \Sigma (u \cdot \sin(2\pi f t i + \psi))) \end{aligned}$$

where i denotes the number of times of sing-around, and Σ denotes an integration from i=1 to N. The sing-around method is a method where transmission/reception of an ultrasonic wave is repeated, whereby a long total propagation time is obtained, and accordingly, the measurement accuracy is increased. Herein, the details of measurement processing of the sing-around method are omitted.

From the difference of the inverse numbers of T1 and T2, the following expression can be obtained:

$$\begin{aligned} &1/T1 - 1/T2 \\ &= (\Sigma [2V \cos \theta] + \Sigma [u \cdot (\sin(2\pi f t) - \sin(2\pi f t + \psi))]) / \Sigma L \end{aligned}$$

When $\psi = \pi$, $\sin(2\pi f t + \psi) = -\sin(2\pi f t)$. That is, an influence of the variation is cancelled when the sing-around method is used. Thus,

$$V = (L/2\cos\theta) \cdot (1/T_1 - 1/T_2)$$

That is, the flow velocity V can be measured when there is a variation, and the flow rate can be measured in consideration of the cross-sectional area of the flow path.

The start timing when the time difference ψ is π is described with reference with Figure 15. An output signal of the variation detection means 229 is achieved by comparing and detecting a zero-crossing point of an alternating component of the pressure variation by a comparator. That is, measurement of T1 is started at a rising edge of the output signal of the variation detection means, and integral time T1 is measured for a predetermined number of times of sing-around. On the other hand, measurement of T2 is started at a falling edge of the output signal of the variation detection means 29, and integral time T2 is measured for the same predetermined number of times of sing-around. As shown in Figure 15, T1 is measured within zones A, B, and C of the pressure waveform. T2 is measured within zones F, G, and H, which have an inverted amplitude of that within zones A, B, and C. Thus, the pressure variation is cancelled.

When the pressure variation exhibits a positive-negative (peak-to-peak) symmetry waveform as shown in Figure 15, the variation can be cancelled by a single measurement operation for each of T1 and T2. However, when the pressure variation exhibits a positive-negative (peak-to-peak) asymmetry waveform as shown in Figure 16, the variation can be cancelled by appropriately changing the time from which the measurement is started. That is, the measurement of T1 is started at a rising edge of the

output signal of the variation detection means 229, and integral time T1 is measured for a predetermined number of times of sing-around. On the other hand, measurement of T2 is started at a falling edge of the output signal of the variation detection means 229, and integral time T2 is measured for the same predetermined number of times of sing-around. Then, in the next measurement cycle, the measurement of T1 is started at a falling edge of the output signal of the variation detection means 229, and integral time T1 is measured for a predetermined number of times of sing-around. On the other hand, measurement of T2 is started at a rising edge of the output signal of the variation detection means 229, and integral time T2 is measured for the same predetermined number of times of sing-around. Referring to Figure 16, in the first measurement cycle, T1 is measured within zones A, B, and C, and T2 is measured within zones D, E, and F. After the first measurement cycle, the difference in the measured value between zones C and F, $C - (-F)$, is left as an error because the waveforms of zones C and F are different. In the second measurement cycle, T1 is measured within zones H, I, and J which have an opposite waveform, and T2 is measured within zones K, L, and M. After the second measurement cycle also, the difference in the measured value between zones J and M is left as an error because the waveforms of zones J and M are different. In the second measurement cycle, the measurement is performed for an ultrasonic wave transmitted from the upstream side within zone M, whereas the measurement is performed for an ultrasonic wave transmitted from the downstream side within zone J. Thus, the signs of the measured values are inverted. As a result, the difference in the measured value between zones J and M, $(-J - M)$, is left as an error. Hence, if considering that $C = M$ and $F = J$, when $C - (-F)$ and $(-J - M)$ are

added and averaged, a result of the operations is zero. That is, the pressure variation is cancelled. It is apparent that, when the direction in which an ultrasonic wave is transmitted is alternately changed at each measurement, the measurement can be started with a constant timing. In the above example, the measurement for two measurement cycles has been described. However, when the waveform of the pressure variation is asymmetrical and complicated, measurement is repeated while successively changing the time when the measurement is started according to the periodicity of a waveform, whereby the measured values are averaged, and accordingly, an error can be suppressed to a minimum value.

Next, a flow of the measurement is described with reference to the flowcharts of Figures 17 and 18. In the first step, whether or not the signal of the variation detection means is at a rising edge is determined. When a rising edge is not detected, the determination is repeated until the rising edge of the output signal of the variation detection means 229 arrives. If a rising edge does not appear after a predetermined time period, detection of a rising edge is discontinued by detection cancellation means, and it is determined that there is no pressure variation. Then, measurement of first measurement time T1 and second measurement time T2 are performed. When a rising edge is detected, the first measurement time T1 is measured. Then, whether or not the signal of the variation detection means 229 is at a falling edge is determined. When a falling edge is detected, measurement of second measurement time T2 is performed. If a falling edge does not appear after a predetermined time period, detection of a falling edge is discontinued by detection cancellation means, and it is determined that there is no pressure variation. Then,

measurement of second measurement time T2 is performed. From the first measurement time T1 and second measurement time T2, the flow rate $Q(j)$ is calculated.

5 In the next measurement cycle, as shown in Figure 18, the process is started with falling-edge detection. After the falling-edge detection step is performed, the first measurement time T1 is measured. Thereafter, after the rising-edge detection step is performed, the second measurement time T2 is measured. From the first measurement time T1 and second measurement time T2, the flow rate $Q(j+1)$ is calculated. The measurement is repeated while changing the time at which the measurement is started, and the first flow rate $Q(j)$ and second flow rate $Q(j+1)$ are measured and successively averaged, whereby the flow rate Q is calculated. Thus, the measure values are averaged, whereby an error can be removed in principle.

20 Since a pressure variation in the flow path can be measured with the second piezoelectric transducer 225, it is necessary to provide a pressure sensor. Thus, the size of a flowmeter can be decreased, and the structure of the flow path can be simplified. Further, the flow rate can be instantaneously measured with a high accuracy in a reliable manner even when a pressure variation occurs. The measurement is performed when a change in the pressure variation is inverted, whereby the phases of the pressure variation and the measurement timing can be shifted. Thus, a measurement error caused due to the pressure variation can be offset. Furthermore, at each measurement, the timing at which the measurement is performed is alternately changed between a positive point and a negative point, whereby an influence of the pressure variation can be offset even when

the pressure variation is asymmetrical between the high pressure side and the low pressure side. Furthermore, the measurement is repeated according to the sing-around method, whereby the measured values can be averaged within a single measurement cycle. Therefore, the flow rate measurement can be performed in a reliable manner. Furthermore, by the selection means, at least one of the first and second vibration means can be selected and used for pressure detection. Thus, both the flow rate measurement and the pressure measurement can be achieved. A variation is detected at a point in the vicinity where a pressure variation is zero, whereby the frequency of the variation can be correctly grasped, and the flow rate can be offset. Even when there is no variation, the flow rate can be automatically measured at a predetermined time. The piezoelectric transducers are used together with the variation detection means. Therefore, an ultrasonic wave is used for detecting a pressure variation while being used for transmission/reception. Moreover, it is not necessary to secure a place for installing pressure detection means which is exclusively used for pressure detection, and the number of parts which can cause leakage of fluid can be decreased.

It should be noted that, even when the detection of a pressure variation which has been described in this embodiment is performed with pressure detection means which is exclusively used for pressure detection, the same functional effects can be obtained. The example where the second piezoelectric transducers provided on the downstream side is used for pressure detection has been described. However, even when the first piezoelectric transducers provided on the upstream side is used for pressure detection,

the same effects can be obtained. Further, even when the first piezoelectric transducers on the upstream side and the second piezoelectric transducers on the downstream side are alternately used for pressure detection as shown in Figure 19, the same effects can be obtained. Moreover, by alternately using the piezoelectric transducers, the operation state of each piezoelectric transducer can be checked. That is, when the variation detection means detects the same signal frequency from both piezoelectric transducers, it can be determined that the both piezoelectric transducers are operating normally.

In the above-described example, the flowmeter is a general-purpose measuring device. However, when a flowmeter of the present invention is used in a gas meter, the flow meter can be provided in a pipeline in which fluctuation occurs, such as a pipeline system where a gas engine heat pump is used. Furthermore, this embodiment has been described in conjunction with a pressure variation. However, it is apparent that the same effects can be obtained for a flow rate variation.

(Embodiment 7)

Figure 20 is a timing chart showing an operation of a flowmeter according to embodiment 7 of the present invention. Embodiment 7 is different from embodiment 6 in that the flowmeter of embodiment 7 includes repetition means 234 for performing signal transmission/reception based on a sing-around method a plurality of times over a period which is a multiple of one cycle of a variation frequency. The structure of the flowmeter of embodiment 7 is shown in Figure 13.

In an example illustrated in Figure 21, measurement is started with an interval of a predetermined time period (e.g., 2 seconds). When a predetermined time arrives, the frequency of a variation is measured and detected by the variation detection means 229. Then, the number of times of a sing-around process is set so as to substantially conform with the variation frequency. For example, the time spent for a single propagation can be calculated by dividing the distance between the piezoelectric transducers, which transmit/receive an ultrasonic wave, by the velocity of sound. A required number of times of the sing-around process can be calculated by dividing the measured frequency by the calculated time spent for a single propagation. The measurement of the flow rate is repeated based on the number of times of the sing-around process. At step ⑦ in Figure 21, the process ⑦ of Figure 17 is performed.

In this way, the number of times of the sing-around process is changed so as to conform with a variation frequency, whereby one cycle of the variation frequency can be measured. Accordingly, the pressure variation can be averaged, and the flow rate can be measured in a reliable manner. The measurement is performed while the pressure synchronization and the number of times of the sing-around process conform with a multiple of one cycle of the variation frequency, whereby the flow rate measurement can be performed in a further reliable manner. Furthermore, since the pressure synchronization can be detected by utilizing a signal of the piezoelectric transducers, a synergistic effect can be obtained, i.e., the variation frequency can be detected, and the flow rate measurement can be performed in a reliable manner.

In Figure 20, the measurement for two cycles has been described. However, when the propagation distance is short, in order to increase the accuracy of the measurement, it is necessary to perform a sing-around process for more than a predetermined number of times. Therefore, when the number of times of the sing-around process which is obtained from the variation frequency is smaller than the predetermined number of times, the number of times of the sing-around process is determined so as to be a multiple of the variation frequency.

(Embodiment 8)

Figure 22 is a timing chart showing an operation of a flowmeter according to embodiment 8 of the present invention. Embodiment 8 is different from embodiment 6 in that a flowmeter of embodiment 8 includes repetition means 234 for performing measurement of a transmitted/received sonic wave such that, when an output of the variation detection means 229 makes a predetermined change (e.g., when the output falls), measurement of a transmitted/received sonic wave is started, and sing-around process is repeated until the output of the variation detection means makes a predetermined change (e.g., when the output falls). The flow meter of embodiment 8 has the structure shown in Figure 13.

As shown in Figure 23, a rising edge of a variation detection signal is detected at the start of the measurement, and the sing-around process is started. Then, when the variation detection signal rises again, the sing-around process is stopped, and a first measurement time T1 is measured. Next, a falling edge of the variation detection signal is detected at the start of the measurement, and the

5 sing-around process is started. Then, when the variation detection signal falls again, the sing-around process is stopped, and a second measurement time T2 is measured. From the measurement times T1 and T2, the flow rate is calculated.

10 In this way, the start and stop of the measurement can be conformed with the frequency of the pressure variation, and therefore, the measurement can be performed based on the variation frequency. Thus, the pressure variation is averaged, and the flow rate can be measured in a reliable manner.

(Embodiment 9)

15 Figure 24 shows a structure of a flowmeter according to embodiment 9 of the present invention. Embodiment 9 is different from embodiment 6 in that the flowmeter of embodiment 9 includes: two-bit count means 236 for counting a variation of an output signal of the variation detection means 229; and flow rate detection means 228 where measurement is performed such that a count value of the count means 236 is different between the first time measurement and the second time measurement, and the flow rate measurement is performed only when all the combinations of the two bits are achieved for the same number of times. The timing chart of the measurement is shown in Figure 25.

25 As shown in Figure 25, when a variation is repeated by units of two cycles, for example, measurement of T1 is started at a time when an output of the count means is (1,0), and an output of the variation detection means is at a rising edge. Measurement of T2 is started at a subsequent falling edge of the variation detection means. Such measurement can

30

be notionally expressed as $Q(i) = (A - B + C) - (-B + C - D) = A + D$. In the next measurement cycle, measurement of T1 is started at a time when an output of the count means is (1,1) and at a falling edge of the variation detection means.

5 Measurement of T2 is started at a subsequent rising edge of the variation detection means. Such measurement can be notionally expressed as $Q(i+1) = (-B + C - D) - (C - D + A) = -A - B$. Subsequent measurement can be notionally expressed as: $Q(i+2) = (C - D + A) - (-D + A - B) = C + B$; and $Q(i+3) = (-D + A - B) - (A - B + C) = -C - D$. Thus, $Q(i) + Q(i+1) + Q(i+2) + Q(i+3) = 0$. That is, a

10 pressure variation is cancelled.

In the above example, the measurement for four measurement cycles has been described. However, when the waveform of the pressure variation is asymmetrical and complicated,

15 measurement is repeated while successively changing the time when the measurement is started according to the periodicity of a waveform, whereby the measured values are averaged, and accordingly, an error can be suppressed to a minimum

20 value. Since the measurement can be performed at all the variation timings, averaging of the measured values is achieved, and the flow rate can be measured in a reliable manner.

25 (Embodiment 10)

Figure 26 shows a structure of a flowmeter according to embodiment 10 of the present invention. Embodiment 10 is different from embodiment 6 in that the flowmeter of embodiment 10 includes: frequency detection means 237 for

30 detecting the frequency of a signal of the variation detection means 229; and measurement control means 230 for starting measurement only when the frequency detected by the frequency detection means 237 is equal to a

predetermined frequency.

As shown in Figure 27, the measurement is started only when the signal of the variation detection means 229 is equal to a predetermined frequency T_m . With such an arrangement, the measurement can be performed at a predetermined variation frequency even when the frequency varies. Even with a pressure waveform shown in Figure 25, the flow rate can be measured only for a specific pressure variation so long as the frequency is detected. Thus, even when the frequency of the pressure variation varies, the flow rate can be measured within a short space of time in a reliable manner. The frequency is detected at a time interval (e.g., 2 milliseconds), whereby flexibility is given to the measurement, so that the measurement can be continued without interruption.

(Embodiment 11)

Figure 28 shows a structure of a flowmeter according to embodiment 11 of the present invention. Embodiment 11 is different from embodiment 6 in that the transmission/reception means utilizes propagation of heat for detecting a change in the state of fluid. Reference numeral 238 denotes a heater for emitting heat, reference numeral 239 denotes a first temperature sensor for receiving the heat, and reference numeral 240 denotes a second temperature sensor for receiving the heat. The second temperature sensor 240 itself can generate heat and detect a change in the state of fluid based on a change in its own resistance value.

Of course, the second temperature sensor is also used as heat transmission/reception means, whereby a change

in the state of fluid, i.e., a variation of the flow velocity, or a variation of pressure, can be detected. Furthermore, the measurement for one measurement cycle is performed in synchronization with the detected variation. Therefore,
5 the flow rate measurement can be performed with a high accuracy in a reliable manner similarly as described in previous embodiments.

(Embodiment 12)

10 Figure 29 is a block diagram showing a flowmeter according to embodiment 12 of the present invention. In Figure 29, reference numeral 323 denotes a first piezoelectric transducer, which is first vibration means of transmission/reception means that is provided in a flow
15 path 324 and that performs transmission/reception using an ultrasonic wave as a state change of fluid. Reference numeral 325 denotes a second piezoelectric transducer, which is second vibration means of transmission/reception means that performs transmission/reception of an ultrasonic
20 wave. Reference numeral 326 denotes a switch (switching means) for switching a transmission/reception operation of the first piezoelectric transducer and the second piezoelectric transducer. Reference numeral 327 denotes time measurement means for measuring a propagation time of
25 a sonic wave repeatedly transmitted/received between the first piezoelectric transducer 323 and the second piezoelectric transducer 325. Reference numeral 328 denotes flow rate detection means for detecting the flow rate based on a value of the time measurement means.
30 Reference numeral 329 denotes pressure variation detector which functions as variation detection means for detecting a pressure variation in the flow path 324. Reference numeral 330 denotes synchronization pulse output means

which functions as variation detection means for converting a pressure signal of the pressure variation detector 329 to a digital signal. Reference numeral 331 denotes measurement control means for directing measurement so as to be in synchronization with a timing of the pressure variation detected by the variation detected means. Reference numeral 332 denotes a transmitter for the transmission/reception means of an ultrasonic signal. Reference numeral 333 denotes a receiver for the transmission/reception means of an ultrasonic signal. Reference numeral 334 denotes repetition means for repeating transmission/reception of an ultrasonic wave. Reference numeral 335 denotes measurement monitoring means for monitoring abnormality of the measurement control means.

Next, an operation and function are described with reference to Figures 14, 30, and 31. In a flow path having a structure shown in Figure 14, propagation time T1 of an ultrasonic wave from the first piezoelectric transducer 323 to the second piezoelectric transducer 325 is $T1 = L/(C+V\cos\theta)$. Propagation time T2 of an ultrasonic wave from the second piezoelectric transducer 325 to the first piezoelectric transducer 323 is $T2 = L/(C-V\cos\theta)$. Herein, V denotes a flow velocity in the flow path, C denotes acoustic velocity, and θ denotes an angle of inclination. With the difference of inverse numbers of T1 and T2, the flow velocity V is obtained from T1 and T2, by changing the above expressions, as shown in the following expression:

$$V=(L/2\cos\theta) \cdot (1/T1-1/T2)$$

If there is a pressure variation in the flow path, the flow velocity changes according to the pressure

variation. Thus, T1 and T2 are expressed as follows:

$$T1=L/(C+V\cos\theta+u \cdot \sin(2\pi ft))$$

$$T2=L/(C-V\cos\theta-u \cdot \sin(2\pi ft+\psi))$$

5

where f denotes variation frequency of pressure, u denotes variation flow velocity, and ψ denotes difference between a start time of T1 measurement and a start time of T2 measurement (phase difference). The difference between the inverse numbers of T1 and T2 is expressed as follows:

10

$$1/T1-1/T2$$

$$=(2V\cos\theta+u \cdot (\sin(2\pi ft)+\sin(2\pi ft+\psi)))/L$$

15

When $\psi=\pi$, $\sin(2\pi ft+\psi)=-\sin(2\pi ft)$. That is, an influence of the variation is cancelled. Thus,

$$V=(L/2\cos\theta) \cdot (1/T1-1/T2)$$

20

That is, the flow velocity V can be measured when there is a variation, and the flow rate can be measured in consideration of the cross-sectional area of the flow path. Thus, when $\psi=\pi$, the measurement control means, which measures the flow rate while detecting a pressure variation, can measure the flow rate with a high accuracy in a reliable manner without being influenced by a pressure variation. In the above example, the measurement based on a single transmission/reception operation has been described. However, it is apparent that, also in the case where the integrated time is obtained by a method where the propagation time is repeatedly measured by the repetition means 234, flow rate can be similarly obtained.

25

30

As shown in Figure 30, the measurement control means 331 outputs a measurement start signal when a predetermined measurement time arrives (e.g., every two seconds), and waits for a change in an output signal of the synchronization pulse output means whose threshold value is a zero-crossing point of a pressure variation. Then, when a falling signal of an output signal of the synchronization pulse output means 330 is output as the first output signal, measurement of first measurement time T1 is started, and measurement of a propagation time is repeated until a rising signal of the output signal of the synchronization pulse output means 330 is output as the second output signal. In the next measurement cycle, measurement of second measurement time T2 is started when a rising signal of the output signal of the synchronization pulse output means 330 is output as the first output signal, and measurement of a propagation time is repeated until a falling signal of the output signal of the synchronization pulse output means 330 is output as the second output signal. Then, the measurement times T1 and T2 obtained by the time measurement means 327 is converted into the flow rate by the flow rate detection means 328, and the flow rate measurement is completed.

As shown in Figure 31, the measurement control means 331 outputs a measurement start signal when a predetermined measurement time arrives. However, when no change occurs in the output signal of the synchronization pulse output means 330 after a predetermined time period, the measurement control means 331 automatically outputs a measurement start signal, and measurement is performed according to a predetermined number of repetition times (e.g., 256 times). For example, in the case where

measurement is performed at an interval of 2 seconds, and a pressure variation occurs within a range from 10 Hz to 20 Hz, the predetermined period as a waiting time can be set within a range from 0.1 second to 2 seconds. However, in this case, it is preferable to select 1 second as an optimum value. Furthermore, the predetermined number of repetition times can be set within a range from 2 times to 512 times. However, in this case, it is preferable to select an optimum value according to the frequency of a pressure variation.

Thus, even when no variation occurs in pressure after a measurement start signal is output, the measurement is started after a predetermined period, whereby the flow rate measurement can be surely performed when it is necessary to perform the flow rate measurement. For example, in a flowmeter of a gas meter, whether or not there is a gas flow is measured when an earthquake occurs. Even when the flowmeter is waiting for occurrence of a pressure variation when the earthquake occurs, and a synchronization pulse output signal cannot be obtained due to abnormality in a pressure variation, the flow rate measurement can be automatically performed, and therefore, any abnormality can be dealt with.

In the above example, a variation in a flow has been described as a pressure variation in the flow path. However, it is apparent that the same effects can be obtained by using flow velocity variation detection means even when there is a variation in the flow velocity.

(Embodiment 13)

Figure 32 is a timing chart showing an operation of

a flowmeter according to embodiment 13 of the present invention. Embodiment 13 is different from embodiment 12 in that the flowmeter of embodiment 13 includes measurement monitoring means 335 wherein, when a start signal is not issued within a predetermined period after a direction from the measurement control means 331 is issued, measurement is not performed until a next direction from the measurement control means is issued. The structure of the flowmeter of embodiment 13 is shown in Figure 29.

As shown in Figure 32, the measurement control means 331 outputs a measurement start signal when a predetermined measurement time arrives. However, when no change occurs in the output signal of the synchronization pulse output means after waiting for such a change for a predetermined time period, the measurement monitoring means 335 directs the measurement control means 331 to stop waiting for a change in the synchronization pulse signal. The measurement control means 331 waits for a next measurement time (e.g., 2 seconds later). Herein, if measurement is performed at an interval of 2 seconds, and a pressure variation occurs within a range from 10 Hz to 20 Hz, the predetermined period as a waiting time can be set within a range from 0.1 second to 2 seconds. However, in this case, it is preferable to select 1 second as an optimum value.

As described above, when no change occurs in the pressure after a measurement start signal is issued, waiting for a change is stopped after a predetermined time period has elapsed, and flow rate measurement is not performed, whereby a low-accuracy measurement of flow rate can be avoided. In Figure 32, a time when the first propagation

time T1 is measured is shown. However, if a synchronization pulse does not occur when the second propagation time T2 is measured, an interval between the time when T1 is measured and the time when T2 is measured becomes considerably long, and accordingly, the measurement accuracy decreases. Such measurement with a decreased accuracy can be avoided. Furthermore, since the measurement operation is suspended until a next measurement direction is issued, unnecessary measurement is avoided, and consumed power can be reduced. For example, in a gas meter where a microcomputer for controlling a safety function is driven by an electric battery cell, the consumed power is reduced, and accordingly, a long lifetime can be obtained.

(Embodiment 14)

Figure 33 is a timing chart showing an operation of a flowmeter according to embodiment 14 of the present invention. Embodiment 14 is different from embodiment 12 in that the flowmeter of embodiment 14 includes measurement monitoring means 335 wherein, when an end signal is not issued within a predetermined period after a start signal is issued, reception of a sonic wave is ended, and a start signal is output again. The structure of the flowmeter of embodiment 14 is shown in Figure 29.

As shown in Figure 33, the measurement control means 331 outputs a measurement start signal when a predetermined measurement time arrives, and detects a first output signal at a falling edge of an output signal of the synchronization pulse output means so as to start measurement. Then, when a second output signal (falling edge) of the output signal of the synchronization pulse output means does not emerge after a predetermined time

period, waiting for the synchronization pulse signal is ended, and a start signal is output again for measurement. Herein, if measurement is performed at an interval of 2 seconds, and a pressure variation occurs within a range from 10 Hz to 20 Hz, the predetermined period as a waiting time can be set within a range from 0.1 second to 2 seconds. However, in this case, it is preferable to select 1 second as an optimum value. With 1 second, even if measurement is performed again (re-measurement), the measurement can be completed before a next measurement time arrives after 2 seconds. If no second output signal emerges in the re-measurement process, the operation waits for a next measurement time.

As described above, when no change occurs in the pressure after a measurement is started, waiting for a change is ended after a predetermined time period, and flow rate measurement is not performed, whereby an incorrect measurement of flow rate can be avoided. Furthermore, due to re-measurement, lack of certain periodic measurement data can be prevented, and measurement processing, such as averaging, can be smoothly performed, whereby the accuracy of a measured flow rate value can be improved. Furthermore, without a direction concerning the end of measurement, the time measurement means performs erroneous measurement, and the measurement accuracy decreases. Such measurement with a decreased accuracy can be avoided. Furthermore, the measurement is forcibly ended, whereby the measurement process does not stop due to a wait for an end direction. Thus, the process can proceed to a subsequent step. Therefore, a measurement operation can be achieved in a reliable manner.

(Embodiment 15)

Figure 34 is a flowchart showing an operation of a flowmeter according to embodiment 15 of the present invention. Embodiment 15 is different from embodiment 12 in that the flowmeter of embodiment 15 includes measurement monitoring means 335 wherein, when an end signal is not issued within a predetermined period T after a start signal is issued, reception of a sonic wave is ended, and measured data is abandoned. The structure of the flowmeter of embodiment 15 is shown in Figure 29.

As shown in Figure 34, after a first output signal is output, when a second output signal which indicates the end of one cycle is not issued after the predetermined time T (e.g., 0.5 second) has elapsed, repetition of transmission/reception of a ultrasonic wave is ended, and previously measured data are abandoned. Then, after being suspended for a predetermined time period, measurement is resumed.

As described above, when the measurement is not successful, the measured data is abandoned, whereby only data measured with a high accuracy can be used, and a measurement operation can be performed in a reliable manner. Further, it is not necessary to hold measured data, and accordingly, the amount of power consumed for measurement can be decreased. Furthermore, by monitoring whether or not the predetermined time T is longer than a periodical measurement cycle (e.g., 2 seconds), measurement can be performed such that measurement times do not overlap with each other. Even when a propagation time of an ultrasonic wave is varied due to a variation of temperature, the measurement operation can be managed by controlling the same

predetermined time T.

(Embodiment 16)

5 Figure 35 is a flowchart showing an operation of a
flowmeter according to embodiment 16 of the present
invention. Embodiment 16 is different from embodiment 12
in that the flowmeter of embodiment 16 includes measurement
monitoring means 335 wherein, when the number of repetition
10 times is equal to or more than a predetermined number of
times N1, reception of a sonic wave is ended, and measured
data is abandoned. The structure of the flowmeter of
embodiment 16 is shown in Figure 29.

15 As shown in Figure 35, after a first output signal
is output, if a second output signal which indicates the
end of one cycle is not issued when transmission/reception
of an ultrasonic wave is repeated for the predetermined
number of times N1 (e.g., 512 times) or more, repetition
of transmission/reception of the ultrasonic wave is ended,
20 and previously measured data are abandoned. Then, after
being suspended for a predetermined time period, measurement
is resumed.

25 As described above, when the measurement is not
successful, the measured data is abandoned, whereby only
data measured with a high accuracy can be used, and a
measurement operation can be performed in a reliable manner.
Further, it is not necessary to hold measured data, and
accordingly, the amount of power consumed for measurement
30 can be decreased. Furthermore, even when a propagation time
of an ultrasonic wave is varied due to a variation of
temperature, the measurement can be performed independently
of the propagation time until the limit of the number of

repetition times by controlling the number of repetition times.

(Embodiment 17)

5 Figure 36 is a flowchart showing an operation of a
flowmeter according to embodiment 17 of the present
invention. Embodiment 17 is different from embodiment 12
in that the flowmeter of embodiment 17 includes measurement
10 monitoring means 335 wherein, when the number of repetition
times is equal to or less than a predetermined number of
times N_2 , measured data is abandoned, and a start signal
is output again. The structure of the flowmeter of
embodiment 17 is shown in Figure 29.

15 As shown in Figure 36, in predetermined measurement
which is performed based on a variation frequency, when the
number of repetition times is equal to or less than a
predetermined number of times N_2 (e.g., 100 times),
previously measured data is abandoned. Then, after being
20 suspended for a predetermined time period, the measurement
is resumed.

25 Even when the measurement is correctly performed,
if the number of repetition times is equal to or less than
a predetermined number of times, it is probable that a
pressure variation is not correctly grasped. In such a case,
obtained data is abandoned and measurement is performed
again, which is possible because the measurement is
performed over more than one cycle. Therefore, a
30 measurement operation can be performed in a reliable manner.
Further, it is not necessary to hold measured data, and
accordingly, the amount of power consumed for measurement
can be decreased.

(Embodiment 18)

Figure 37 is a flowchart showing an operation of a flowmeter according to embodiment 18 of the present invention. Embodiment 18 is different from embodiment 12 in that the flowmeter of embodiment 18 includes measurement monitoring means 335 wherein, when the number of repetition times is equal to or less than a predetermined number of times N2, measured data is abandoned, and a start signal is output again. The synchronization pulse output means 330 which functions as variation detection means outputs a second output signal when a signal of the synchronization pulse output means 330 reaches a second cycle and continues the measurement until an end signal, indicating the end of the second cycle, is issued. The structure of the flowmeter of embodiment 18 is shown in Figure 29.

As shown in Figure 37, in predetermined measurement which is performed based on a variation frequency, when the number of repetition times is equal to or less than a predetermined number of times N2 (e.g., 100 times), previously measured data is abandoned. Then, after being suspended for a predetermined time period, a second output signal is output when a signal of the synchronization pulse output means 330 reaches a second cycle, and the measurement is resumed and continued until an end signal of the second cycle is issued.

Even when the measurement is correctly performed, if the number of repetition times is equal to or less than a predetermined number of times, it is probable that a pressure variation is not correctly grasped. In such a case,

obtained data is abandoned and measurement is performed again, which is possible because the measurement is performed over more than one cycle. Therefore, a measurement operation can be performed in a reliable manner. Further, since re-measurement is performed over two cycles, the measurement accuracy is improved due to such a long-time measurement.

(Embodiment 19)

Figure 38 is a flowchart showing an operation of a flowmeter according to embodiment 19 of the present invention. Embodiment 19 is different from embodiment 12 in that the flowmeter of embodiment 19 includes measurement monitoring means 335 wherein, when the difference between the first number of repetition times N3 of measurement, where an ultrasonic wave is transmitted from the first transmission/reception means among a pair of transmission/reception means to the second transmission/reception means, and the second number of repetition times N4 of measurement where an ultrasonic wave is transmitted from the second transmission/reception means to the first transmission/reception means, is equal to or more than a predetermined number of times, a start signal is output again. The structure of the flowmeter of embodiment 19 is shown in Figure 29.

As shown in Figure 38, in predetermined measurement which is performed based on a variation frequency, when the difference between the first number of repetition times N3 and the second number of repetition times N4 is equal to or more than a predetermined number of times M (e.g., 10 times), previously measured data is abandoned. Then, after being suspended for a predetermined time period, the

measurement is resumed.

Even when the measurement is correctly performed, if the difference between the first number of repetition times N3 and the second number of repetition times N4 is large, it is probable that a pressure variation is not correctly grasped, or that the frequency of a pressure variation is changed. If so, a result of the measurement is not correct. Thus, the obtained data is abandoned, and measurement is performed again, whereby a measurement operation can be performed in a reliable manner.

(Embodiment 20)

Figure 39 is a flowchart showing an operation of a flowmeter according to embodiment 20 of the present invention. Embodiment 20 is different from embodiment 12 in that the flowmeter of embodiment 20 includes repetition means 334 for setting the number of repetition times such that the first number of repetition times N3 of measurement, where an ultrasonic wave is transmitted from the first transmission/reception means among a pair of transmission/reception means to the second transmission/reception means, is equal to the second number of repetition times N4 of measurement, where an ultrasonic wave is transmitted from the second transmission/reception means to the first transmission/reception means. The structure of the flowmeter of embodiment 20 is shown in Figure 29.

As shown in Figure 39, in predetermined measurement which is performed based on a variation frequency, measurement is performed for the second number of repetition times which is equal to the first number of repetition

times N3. That is, the second measurement is performed for the first number of repetition times N3, whereby the measurement can be performed without causing a large difference between a true value and a measured value even when the frequency of a pressure variation varies sharply.

Thus, even when the frequency of a pressure variation sharply varies, flow rate measurement can be performed. For example, in the case of a gas meter, there is a time when it is necessary to perform flow rate measurement for securing safety. Even when the frequency of a pressure variation sharply varies, measurement is performed as described above, whereby it can be quickly determined whether or not the measured value is in the vicinity of a predetermined flow rate.

(Embodiment 21)

Figure 40 is a flowchart showing an operation of a flowmeter according to embodiment 21 of the present invention. Embodiment 21 is different from embodiment 12 in that the flowmeter of embodiment 21 includes measurement monitoring means 335 for monitoring a measurement operation such that the number of times that a start signal is output again is limited to a predetermined number of times C so as not to permanently repeat outputting of the start signal. The structure of the flowmeter of embodiment 21 is shown in Figure 29.

As shown in Figure 40, when measurement is performed again after measurement based on a pressure variation has failed, the number of times C for the re-measurement is limited (e.g., up to 2 times), whereby outputting of the start signal is prevented from being repeated permanently.

As a result, the flow rate measurement can be performed in a reliable manner.

(Embodiment 22)

5 Figure 41 is a block diagram showing a flowmeter according to embodiment 22 of the present invention. Embodiment 22 is different from embodiment 12 in that, in embodiment 22, propagation of heat is utilized for detecting a change in the state of fluid. Reference numeral 336
10 denotes a heater for emitting heat. Reference numeral 337 denotes a temperature sensor for receiving the heat.

 Even when a temperature sensor which is heat transmission/reception means is used, flow rate measurement
15 can be continuously performed with a high accuracy similarly to the above-described embodiments, because the measurement monitoring means detects each abnormality and perform various processing according to the detected abnormality.

20 (Embodiment 23)

 Figure 42 is a block diagram showing a flowmeter according to embodiment 23 of the present invention. In Figure 42, reference numeral 415 denotes ultrasonic wave flow rate detection means for detecting an instantaneous
25 flow rate; reference numeral 416 denotes fluctuation determination means for determining whether or not the flow rate value varies in a pulsed manner; reference numeral 417 denotes stable flow rate calculation means for calculating a flow rate value by using different means according to the
30 determination result of the fluctuation determination means; and reference numeral 418 denotes filter processing means for performing digital filter processing on a flow rate value.

Next, an operation and function are described with reference to Figures 43 through 45. As shown in Figure 43, in the flowmeter of the present invention, when the difference between an instantaneous flow rate $Q(i)$ measured by the ultrasonic wave flow rate detection means and a previously-measured instantaneous flow rate $Q(i-1)$ is equal to or greater than a predetermined value (e.g., 1 liter/hour), the fluctuation determination means determines that there is a pulse. When there is a pulse, the filter coefficient for filter processing is changed according to the magnitude of the pulse. When there is no pulse, the filter processing is not performed, and the instantaneous flow rate value is treated as a stable flow rate. Herein, the digital filter processing is performed based on the flow shown in Figure 3 and is expressed, for example, as the following expression: $D(i) = \alpha \cdot D(i-1) + (1-\alpha) \cdot Q(i)$, where α denotes the filter coefficient, $Q(i)$ denotes i -th instantaneous flow rate, and $D(i)$ denotes a stable flow rate to be obtained after the filter processing. Such a filter has a characteristic of a low-pass filter which is shown in Figure 45. As the filter coefficient is closer to 1 (generally, 0.999), the filter allows only a lower frequency component to pass therethrough. Thus, the filter can remove a varying value so as not to pass through the filter. When the variation amplitude is small, filter coefficient α_2 (generally, $\alpha_2=0.9$) is selected, and an improved response characteristic to a flow rate variation is obtained with such a relaxed filter characteristic, so that a flow rate variation can be quickly dealt with. Further, when the variation amplitude is large, filter coefficient α_1 (generally, $\alpha_1=0.9999$) is selected, and a variation in a flow rate value is suppressed with such an

extreme low pass filter characteristic.

Furthermore, a pulse component $A(i)$ can be obtained by expression, $A(i)=Q(i)-D(i)$, and $A(i)$ can be used as a variation amplitude.

Thus, the filter processing is performed when the amplitude of a pulse is equal to or greater than a predetermined value, whereby a variation component can be removed. Accordingly, even when a pulse occurs, stable flow rate measurement can be performed with one ultrasonic wave flow rate measurement means. Further, a calculation equivalent to averaging processing can be performed by filter processing without using a large number of memories for storing data. Moreover, the filter characteristic can be freely modified by changing one variable, i.e., a filter coefficient α . Thus, the filter characteristic can be modified according to the magnitude of a pulse. Furthermore, when a pulse occurs, a sharp filter characteristic is selected so as to render a large pulse stable, and the filter processing can be performed only when a pulse occurs. Furthermore, the determination is performed based on the variation amplitude of a pulse, whereby the filter processing can be modified based on the variation amplitude of a pulse. Furthermore, since the filter characteristic is modified based on the variation amplitude, a relaxed filter characteristic that allows a quick variation according to a variation in a flow rate is selected when the variation is small, and when the variation is large, a sharp filter characteristic is selected such that a variation of the flow rate due to a pulse is significantly suppressed.

In this embodiment, the digital filter processing method described is as shown in Figure 44. However, the same effects can be obtained by using other filter processing method.

5

In the above-described example, the flowmeter is a general-purpose measuring device. However, when the flowmeter of this embodiment is used in a gas meter, the flow meter can be provided to a flow-path pipe in which fluctuation occurs, such as a pipeline system where a gas engine heat pump is used.

10

(Embodiment 24)

Figure 46 is a flowchart showing an operation of a flowmeter according to embodiment 24 of the present invention. Embodiment 24 is different from embodiment 23 in that the flowmeter of embodiment 24 includes pulse amplitude detection means for detecting the variation amplitude of a pulse based on two flow rate values which have been subjected to filter processing while changing the filter coefficient α .

15

20

As shown in Figure 46, the difference between a first flow rate value which has been subjected to filter processing with a filter coefficient α_1 (e.g., $\alpha_1=0.999$) and a second flow rate value which has been subjected to filter processing with a filter coefficient α_2 (e.g., $\alpha_2=0.9$) is greater than a predetermined value (e.g., 1 liter/hour), the large filter coefficient α_1 is decreased little by little, such that the flow rate value after stable flow rate calculation quickly becomes stable. Such processing is performed when $1 > \alpha_1 > \alpha_2 > 0$.

25

30

When a stable flow rate which is subjected to filter processing with a large filter coefficient is used, a response characteristic to a flow rate variation is decreased when a pulse causes a variation in the flow rate. However, by processing using two filters, even if the flow rate varies sharply when fluctuation occurs, such a variation can be quickly handled by using a flow rate calculated with a smaller flow rate coefficient.

10 (Embodiment 25)

Figure 47 is a flowchart showing an operation of a flowmeter according to embodiment 25 of the present invention. Embodiment 25 is different from embodiment 23 in that filter processing is performed only when a flow rate value detected by the instantaneous flow rate detection means is low.

As shown in Figure 47, when an instantaneous flow rate measured by the ultrasonic wave flow rate measurement means is smaller than a predetermined flow rate (e.g., 120 liter/hour), a stable flow rate can be correctly measured by a filter process even when a pulse occurs. Furthermore, when the instantaneous flow rate measured by the ultrasonic wave flow rate measurement means is equal to or greater than the predetermined flow rate, the ratio of a variation amplitude of flow rate measurement due to fluctuation is small. Thus, flow rate measurement can be performed correctly without filter processing. Furthermore, since the flow rate is small, the filter processing is performed using a filter coefficient α of a large value (e.g., $\alpha=0.999$).

As described above, filter processing is performed

only when the flow rate is low. Accordingly, a variation of flow rate can be quickly handled when the flow rate is high, and an influence of fluctuation which may be caused when the flow rate is low can be significantly suppressed.

5

(Embodiment 26)

Figure 48 is a flowchart showing an operation of a flowmeter according to embodiment 26 of the present invention. Embodiment 26 is different from embodiment 23 in that the filter processing means modifies a filter characteristic according to the flow rate value.

10

As shown in Figure 48, filter coefficient α_1 (e.g., $\alpha_1=0.9$) is selected when an instantaneous flow rate measured by the ultrasonic wave flow rate measurement means is equal to or greater than a predetermined value (e.g., 120 liter/hour), and filter coefficient α_2 (e.g., $\alpha_2=0.999$) is selected when the instantaneous flow rate is smaller than the predetermined value. When the flow rate is low, filter coefficient α_2 is increased, such that a stable flow rate is mainly measured. For example, when the flowmeter is used in a gas meter, leakage detection, equipment determination, and pilot-burner registration are correctly performed. On the other hand, when the flow rate is high, filter coefficient α_1 is decreased, such that the measurement can be quickly modified according to a flow rate variation, whereby a response characteristic of an integrated flow rate is improved.

15

20

25

30

As described above, the filter characteristic is modified according to the flow rate value. Filter processing is performed when the flow rate is low, and when the flow rate is high, a flow rate variation can be quickly

handled. Besides, when the flow rate is low, an influence of fluctuation can be considerably suppressed. As a result, when the flow rate is high, a response characteristic is increased, and when the flow rate is low, fluctuation can be suppressed.

(Embodiment 27)

Figure 49 is a flowchart showing an operation of a flowmeter according to embodiment 27 of the present invention. Embodiment 27 is different from embodiment 23 in that the filter processing means modifies a filter characteristic at an interval of a flow rate measurement time of the ultrasonic wave flow rate measurement means.

As shown in Figure 49, when the time period for which the flow rate is measured by the ultrasonic wave flow rate measurement means is long (e.g., 12 seconds), a small value is used as filter coefficient α_1 (e.g., $\alpha_1=0.9$) for filter processing. When the time period for which the flow rate is measured by the ultrasonic wave flow rate measurement means is short, a large value is used as filter coefficient α_2 (e.g., $\alpha_2=0.999$) for filter processing.

The filter characteristic is modified according to the length of the time period for flow rate detection. When the measurement period is short, a relaxed filter characteristic is used, and when the measurement period is long, a sharp filter characteristic is used, whereby a variation in the filter characteristic can be suppressed.

(Embodiment 28)

Figure 50 is a flowchart showing an operation of a flowmeter according to embodiment 28 of the present

invention. Embodiment 28 is different from embodiment 23 in that the filter characteristic is modified such that a variation amplitude of a flow rate value calculated by the stable flow rate calculation means is within a predetermined range.

As shown in Figure 50, when a variation value of the flow rate which is obtained by stable flow rate calculation processing after the filter processing is equal to or greater than a predetermined value (e.g., 1 liter/hour), the filter coefficient α is increased so as to control the measurement such that the flow rate variation is suppressed. When the variation value of the flow rate is smaller than the predetermined value, the filter coefficient α is decreased, and the filter processing is performed under a state where a flow rate variation can be dealt with.

The filter characteristic is appropriately modified such that a variation value obtained after the stable flow rate calculation means is within a predetermined range, whereby the flow rate variation can always be suppressed to be equal to or smaller than a predetermined value.

The increased amount of the filter coefficient is changed according to the variation value of the flow rate. when the variation amplitude is large, the increased amount of the filter coefficient is increased. When the variation amplitude is small, the increased amount of the filter coefficient is decreased. With such an arrangement, a variation in the flow rate can be smoothly suppressed.

(Embodiment 29)

Figure 51 is a block diagram showing a flowmeter

according to embodiment 29 of the present invention. Embodiment 29 is different from embodiment 23 in that, in embodiment 29, heat-based flow rate detection means 419 is used in place of the instantaneous flow rate detection means.

5

As shown in Figure 51, even when the heat-based flow rate detection means 419 is used, a measured flow rate varies due to a pressure variation if it is present. However, the same effects can be obtained by using the methods described in embodiments 23-28, and the flow rate can be measured with a high accuracy in a reliable manner.

10

(Embodiment 30)

15

Figure 52 is a block diagram showing a flowmeter according to embodiment 30 of the present invention.

20

25

30

The flowmeter of embodiment 30 includes: a flow rate measurement section 500 through which a fluid to be measured flows; a pair of ultrasonic wave transducers 501 and 502 which are provided in the flow rate measurement section 500 and which transmit/receive an ultrasonic wave; a driver circuit 503 for driving the ultrasonic wave transducer 502; a reception detecting circuit 504 which is connected to the ultrasonic wave transducer 501 and which detects an ultrasonic wave signal; a timer 505 for measuring a propagation time of an ultrasonic wave signal; a control section 507 for controlling the driver circuit 503; a calculation section 506 for calculating the flow rate from an output of the timer; and periodicity change means 508 for sequentially changing a driving method of the driver circuit 503. Embodiment 30 is different from the conventional examples in that the flowmeter of embodiment 30 includes the periodicity change means 508. The details of

the periodicity change means 508 are shown in Figure 53. Reference numeral 510 denotes a first oscillator, which herein generates an oscillation signal of 500 kHz. Reference numeral 511 denotes a second oscillator which generates an oscillation signal of 520 kHz. Reference numeral 512 denotes a switching device which selects either an output of the first oscillator 510 or an output of the second oscillator 511 based on an output of the control section 507 so as to output the selected output to the driver circuit 503.

First, the control section 507 outputs a switching signal to the switching device 512 to select the first oscillator 510. Then, the timer 505 starts time measurement, and at the same time, the control section 507 outputs a transmission start signal to the driver circuit 503. Receiving the transmission start signal, the driver circuit 503 drives the ultrasonic wave transducer 502 with the oscillation signal of 500 kHz which is an input from the switching device 512. The operations performed thereafter are the same as those of the conventional examples. Next, the control section 507 outputs a switching signal to the switching device 512 to select the second oscillator 511. Then, similarly to the previous flow rate measurement, time measurement of the timer 505 is started, and at the same time, the control section 507 outputs a transmission start signal to the driver circuit 503. Receiving the transmission start signal, the driver circuit 503 drives the ultrasonic wave transducer 501 with the oscillation signal of 520 kHz which is an input from the switching device 512.

Thereafter, the above operations are alternately

continued so as to measure the flow rate. A reception detecting timing in such measurement is shown in Figure 54. As shown in this drawing, times when the 500 kHz signal and the 520 kHz signal are received are temporally shifted. Reception detecting timings for the signals temporally shift as shown in curves (A) and (B) of Figure 54. Thus, in this embodiment, the control section controls the periodicity change means such that the measurement frequency in the flow rate measurement is successively changed so as not to be kept constant. As a result, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

The periodicity change means is structured so as to switchingly output a plurality of output signals having different frequencies, and the control section operates such that the setting of frequency in the periodicity change means is changed for each measurement, and the driving frequency of the driver circuit is changed. Therefore, by changing the driving frequency, the reception detecting timing can be changed by a time corresponding to a periodic variation of a driving signal. Thus, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

In embodiment 30, the driving frequency is changed by switching two oscillators. However, the same effects can be obtained so long as an ultrasonic wave transducer is driven while changing the driving frequency. The present

invention can be achieved regardless of the number of oscillators, the driving frequency, and the structure of the switching device.

5 (Embodiment 31)

Figure 55 is a block diagram showing a flowmeter according to embodiment 31 of the present invention.

10 The flowmeter of embodiment 30 includes: a flow rate measurement section 500 through which a fluid to be measured flows; a pair of ultrasonic wave transducers 501 and 502 which are provided in the flow rate measurement section 500 and which transmit/receive an ultrasonic wave; a driver circuit 503 for driving one of the ultrasonic wave transducers; a reception detecting circuit 504 which is
15 connected to the other ultrasonic wave transducer and which detects an ultrasonic wave; a control section 507 for controlling the driver circuit 503 for a predetermined number of times such that the driver circuit 503 again drives
20 the ultrasonic wave transducers in response to an output of the reception detecting circuit 504; a timer 505 for measuring an elapsed time for a predetermined number of times; a calculation section 506 for calculating the flow rate from an output of the timer 505; and periodicity change
25 means 508 for sequentially changing a driving method of the driver circuit 503.

Figure 56 is a block diagram showing the details of the periodicity change means.

30

Reference numeral 513 denotes a first delay, which generates an output signal 150 μ s after receiving an input signal from the control section 507. Reference numeral 514

denotes a second delay, which generates an output signal 150.5 μ s after receiving an input signal from the control section 507. Reference numeral 515 denotes a third delay, which generates an output signal 151 μ s after receiving an input signal from the control section 507. Reference numeral 516 denotes a fourth delay, which generates an output signal 151.5 μ s after receiving an input signal from the control section 507. Reference numeral 517 denotes a switching device which selects one of first to fourth delay outputs according to an output of the control section 507 and outputs the selected output to the driver circuit 503.

Embodiment 31 is different from embodiment 1 in that the control section 507 receives an output of the reception detecting circuit 504 and drives the ultrasonic wave transducers again, and that this operation is repeated for a number of times which is a multiple of 4 (4 is the delay set number), and during the repetition, the delay times of the periodicity change means 508 are sequentially switched every time an ultrasonic wave is received.

In this structure, the control section 507 changes the setting of the delay every time reception of an ultrasonic wave is detected. Thus, in one measurement operation, reverberation of an ultrasonic wave transmitted in an immediately-previous measurement and an influence of tailing of the ultrasonic wave transducers can be dispersed/averaged, whereby a measurement error can be decreased.

The cycle width which is changed by the periodicity change means has a value which is an equational division of 2 μ s which is a positional period of a resonance frequency

of the ultrasonic transducer (500 kHz). Thus, in an averaged value of the sum of values for all the settings, an error which may be caused due to reverberation of an ultrasonic wave and tailing of an ultrasonic wave sensor (i.e., noise having a cycle of 2 μ s) can be minimized.

Furthermore, the number of times that measurement is repeated is a multiple of 4 (4 is a change number of the periodicity change means). Thus, within a single flow rate measurement cycle, measurement with each of the predetermined values of the periodicity change means is performed the same number of times. As a result, a variation of the measurement result is suppressed, and accordingly, a reliable measurement result can be obtained.

Furthermore, the order of patterns for changing the periodicity is the same for both measurement with an ultrasonic wave transmitted toward the upstream side and measurement with an ultrasonic wave transmitted toward the downstream side. Specifically, in the measurement with an ultrasonic wave transmitted from upstream to downstream, the first delay, second delay, third delay, and fourth delay are selected in this order, and then, the first delay is selected again; this cycle is repeated. The measurement with an ultrasonic wave transmitted from downstream to upstream is performed such that the delays are necessarily selected in the same order. With such an arrangement, the flow rate measurement with an ultrasonic wave transmitted toward the upstream side and the flow rate measurement with an ultrasonic wave transmitted toward the downstream side are always performed under the same conditions. Especially, even when there is a variation in the flow rate, a reliable measurement result can be obtained.

5 In embodiment 31, the delay time is changed by switching the four delays. The same effects can also be obtained so long as the ultrasonic wave transducers can be driven by changing the driving timing. The present invention can be achieved regardless of the delay time, the number of delays, and the structure of the switching device.

10 In the above example, the delay times are inserted between the control section 507 and the driver circuit 503. However, the same effects can also be obtained when the delay times are inserted between the reception detecting circuit 504 and the control section 507.

15 In the above example, the width by which the delay is changed is 2 μ s, the set number to be changed is 4, and the difference between the adjacent settings is 0.5 μ s, which is a quarter of 2 μ s. The present invention is not limited to these values. Each of these values may be a value
20 obtained by uniformly dividing a multiple of one cycle.

(Embodiment 32)

25 Figure 57A is a block diagram showing the periodicity change means of the flowmeter according to embodiment 32 of the present invention.

30 Reference numeral 518 denotes an oscillator, and 519 denotes a phase converter. The oscillator outputs a signal at a frequency of 500 kHz. The phase converter hastens or delays the phase of a signal of the oscillator according to a phase conversion signal from the control section 507, and outputs the signal with hastened or delayed phase. For example, when a phase control signal is Hi (high),

the phase converter outputs an output of the oscillator 518 as it is. When a phase control signal is Lo (low), the phase converter hastens the output signal of the oscillator 518 by 180° and outputs the hastened signal. The reception signals and reception detecting timings in these operations are shown in Figure 57B.

As shown in this drawing, reception points are shifted by a 1/2 cycle. That is, the shift time is 1 μ s.

In this way, the reception detecting timing can be changed by a time period which is obtained by converting a phase variation of a driving signal into time by driving phase conversion. Thus, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

In embodiment 32, the phase of a driving signal is changed by switching between two phases. However, the same effects can be obtained so long as the ultrasonic wave transducers can be driven by changing the driving phase. The present invention can be achieved regardless of the phase to be changed and the structure of the switching device.

(Embodiment 33)

Figure 58 is a block diagram showing the periodicity change means of the flowmeter according to embodiment 33.

Reference numeral 520 denotes a first oscillator which outputs an oscillation signal of 500 kHz, which is a resonance frequency of an ultrasonic wave transducer.

Reference numeral 521 denotes a second oscillator which outputs an oscillation signal of 200 kHz. Reference numeral 522 denotes an ON/OFF circuit which determines whether or not an output of the second oscillator is output to a waveform adding section 523 according to an ON/OFF switching signal from the control section 507. The waveform adding section 523 synthesizes input waveforms to output the synthesized waveform to the driver circuit 503.

When the ultrasonic wave transducer is driven at a frequency of about 500 kHz, an ultrasonic wave signal having a large amplitude can be received. When the ultrasonic wave transducer is driven with only a signal component of 200 kHz, an ultrasonic wave signal can rarely be received. However, an oscillation signal of about 200 kHz is sometimes added or sometimes not added to an oscillation frequency of about 500 kHz. Such an irregular operation can cause a slight change in the frequency of an ultrasonic wave signal to be received. As a result, the reception detecting timing can be changed. Thus, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

(Embodiment 34)

Figure 59 is a block diagram showing the periodicity change means of the flowmeter according to embodiment 34.

Reference numeral 520 denotes a first oscillator which outputs an oscillation signal of 500 kHz, which is a resonance frequency of an ultrasonic wave transducer. Reference numeral 521 denotes a second oscillator which

outputs an oscillation signal of 200 kHz. Reference numeral 524 denotes a phase conversion section which converts the phase of an output signal of the second oscillator 521 by 180° according to an output of the control section 507, and outputs the signal with the converted phase. Reference numeral 523 denotes a waveform adding section for synthesizing input waveforms and outputting the synthesized waveform to the driver circuit 503.

When the ultrasonic wave transducer is driven at a frequency of about 500 kHz, an ultrasonic wave signal having a large amplitude can be received. When the ultrasonic wave transducer is driven with only a signal component of 200 kHz, an ultrasonic wave signal can rarely be received. However, the frequency of an ultrasonic wave signal, which is received by the ultrasonic wave transducer driven based on an addition signal that is obtained by adding the phase of an oscillation signal of about 200 kHz which is changed by 180° in each measurement to an oscillation frequency of about 500 kHz, slightly changes. As a result, the reception detecting timing can be changed. Thus, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

(Embodiment 35)

Figure 60 is a block diagram showing the periodicity change means of the flowmeter according to embodiment 35.

Reference numeral 525 denotes a first oscillator which outputs an oscillation signal of 500 kHz, which is a resonance frequency of an ultrasonic wave transducer.

Reference numeral 526 denotes a second oscillator which outputs an oscillation signal of 200 kHz. Reference numeral 527 denotes a frequency conversion section which converts the frequency of a signal input into the frequency converter, and outputs the signal with the converted frequency. Herein, the frequency conversion section 527 converts the frequency of the input signal to a 1/2, i.e., 100 kHz. Reference numeral 523 denotes a waveform adding section for synthesizing input waveforms and outputting the synthesized waveform to the driver circuit 503.

When the ultrasonic wave transducer is driven at a frequency of about 500 kHz, an ultrasonic wave signal having a large amplitude can be received. When the ultrasonic wave transducer is driven with only a signal component of 200 kHz or 100 kHz, an ultrasonic wave signal can rarely be received. However, the frequency of a received ultrasonic wave signal, which is received by the ultrasonic wave transducer driven based on an addition signal that is obtained by adding about 200 kHz to an oscillation frequency of about 500 kHz and an addition signal that is obtained by adding 100 kHz to an oscillation frequency of 500 kHz, slightly changes. As a result, the reception detecting timing can be changed. Thus, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

(Embodiment 36)

Figure 61 is a block diagram showing a flowmeter according to embodiment 36 of the present invention.

The flowmeter of embodiment 36 includes: a flow rate measurement section 500 through which a fluid to be measured flows; a pair of ultrasonic wave transducers 501 and 502 which are provided in the flow rate measurement section 500 and which transmit/receive an ultrasonic wave; a driver circuit 503 for driving the ultrasonic wave transducer 502; a reception detecting circuit 504 which is connected to the ultrasonic wave transducer 501 and which detects an ultrasonic wave signal; a first timer 527 for measuring a propagation time of an ultrasonic wave signal; a second timer 528 for measuring a time period from when the reception detecting circuit 504 receives a signal to when a value of the first timer 527 is changed; a control section 530 for controlling the driver circuit 503; a calculation section 506 for calculating the flow rate from outputs of the first timer 527 and the second timer 528; a switching circuit 509 for switching connections between the ultrasonic wave transducers 501 and 502 and the driver circuit 503 and the reception detecting circuit 504; a temperature sensor 531 for measuring the temperature of the flowmeter and outputting the measured temperature to the control section 530; and a voltage sensor 532 for measuring the voltage of a power supply which powers the flowmeter.

The control section 530 outputs a measurement start signal to the driving circuit 503 and, simultaneously, starts the time measurement of the first timer 527. The driving circuit 503 drives the ultrasonic wave transducer 502 in response to a signal input so as to emit an ultrasonic wave. The emitted ultrasonic wave propagates in fluid and is received by the ultrasonic wave transducer 501. The reception detecting circuit 504 outputs the received ultrasonic wave signal to the first

timer 527 and the second timer 528. The first timer 527 receives an input signal from the reception detecting circuit 504 to stop the time measurement. The second timer 528 receives an output of the reception detecting circuit 504 to start time measurement, and then stops the time measurement in synchronization with a count-up timing output from the first timer 527. The calculation section 506 receives time measurement results of the first timer 527 and the second timer 528 and calculates the flow rate.

Figure 62 shows operation timings of the first timer 527 and the second timer 528. As shown in Figure 62, since the first timer 527 changes its state at a rising edge of a clock, an extra measurement corresponding to portion A is performed. Since the measurement resolution of the first timer 527 is an interval B in Figure 62, portion A which is counted as a measurement error is generated in each measurement. The extra portion A is measured by the second timer 528 and subtracted in the calculation section 506, whereby a propagation time of an ultrasonic wave with high resolution is obtained, and a correct flow rate value is obtained.

Furthermore, the control section 530 starts the first timer 527 and, simultaneously, outputs a start signal to the second timer 528 so as to start the second timer 528. At a time when the first timer 527 counts up, an output signal, which is in synchronization with the count-up timing, is output from the first timer 527 to the second timer 528 so as to stop the second timer 528. At this time, the value of the second timer 528 is equal to a time measured within one clock time of the first timer 527. This time is

processed in the calculation section 506, a time
corresponding to one clock of the second timer 528 is
obtained, and the time corresponding to the one clock of
the second timer 528, which is used in calculation, is
5 corrected.

This operation is performed when an output of the
temperature sensor 531 or the power supply voltage
sensor 532 varies so as to reach or exceed a set value. With
10 such an arrangement, the second timer 528 does not need to
possess stability to the temperature and power supply
voltage. As a result, inexpensive parts can be used.
Furthermore, it is not necessary to busily make corrections,
and the amount of consumed power can be suppressed to a low
15 level.

Since the flow rate calculation is performed using
a value obtained by subtracting a value of the second
timer 528 from a value of the first timer 527, the time
20 measurement resolution is equal to that of the second
timer 528. Further, since the operation time of the second
timer 528 is very short, the amount of consumed power can
be decreased. Thus, a flowmeter with high resolution which
consumes a small amount of power can be realized.
25 Furthermore, a correct flow rate measurement can be achieved
so long as the second timer 528 operates in a stable manner
after the correction is made until flow rate measurement
is performed. Therefore, a correct measurement can be
performed even when the second timer 528 lacks long-term
30 stability. Thus, a flowmeter with a high accuracy can be
realized with ordinarily-employed parts.

Furthermore, the temperature sensor 531 is provided.

When an output of the temperature sensor 531 varies so as to reach or exceed a set value, the second timer 528 is corrected by the first timer 527. Thus, even when the second timer 528 has a characteristic which varies according to a variation in the temperature, the second timer 528 is corrected every time a temperature variation occurs, whereby correct measurement can be performed. Furthermore, such a correction is made only when it is necessary, the amount of consumed power can be decreased.

Furthermore, the voltage sensor 532 is provided. When an output of the voltage sensor 532 varies so as to reach or exceed a set value, the second timer 528 is corrected by the first timer 527. Thus, even when the second timer 528 has a characteristic which varies according to a variation in the power supply voltage, the second timer 528 is corrected every time a variation occurs in power supply voltage, whereby correct measurement can be performed. Furthermore, such a correction is made only when it is necessary, the amount of consumed power can be decreased.

Furthermore, since such a correction is made, a crystal oscillator is used in a clock of the first timer 527, and a CR oscillation circuit is used in a clock of the second timer 528. A clock using a crystal oscillator operates in a very stable manner. However, in such a clock, a long time is consumed from when an operation is started to when the operation becomes stable. Further, although a long-term stability cannot be secured with a CR oscillation circuit, a timer whose operation quickly becomes stable and which quickly operates in a non-synchronous mode can be readily realized with the CR oscillation circuit. A crystal oscillator is used in a clock of the first timer 527, and

a CR oscillation circuit is used in a clock of the second timer 528, whereby a stable timer with high resolution can be readily realized.

5 In Figure 62 of embodiment 36, the second timer stops at a time when a clock of the first timer falls after the second timer starts to operate. However, the present invention is not limited to this timing because a correct time can be obtained by a calculation to be performed later
10 so long as the timing is in synchronization with the first timer.

(Embodiment 37)

15 Figure 63 is a block diagram showing a flowmeter according to embodiment 37 of the present invention.

20 The flowmeter of embodiment 37 includes: a flow rate measurement section 500; a pair of ultrasonic wave transducers 501 and 502 which are provided in the flow rate measurement section 500 and which transmit/receive an ultrasonic wave; a driver circuit 503 for driving the ultrasonic wave transducer 502; a reception detecting circuit 504 which is connected to the ultrasonic wave transducer 501 and which detects a received ultrasonic wave
25 signal; a control section 507 for controlling the driver circuit 503 a predetermined number of times such that the driver circuit 503 again drives the ultrasonic wave transducer 502 in response to an output of the reception detecting circuit 504; a timer 505 for measuring an elapsed
30 time, a predetermined number of times; a calculation section 506 for calculating the flow rate from an output of the timer 505; and a delay section 533 which is frequency stabilizing means for sequentially changing a driving method

of the driver circuit 503.

5 The control section 507 outputs a measurement start
signal to the delay section 533 and, simultaneously, starts
time measurement of the timer 505. The delay section 533
10 outputs a signal to the driver circuit 503 after a delay
time which is set based on a setting signal from the control
section. In response to the signal input, the driver
circuit 503 drives the ultrasonic wave transducer 502 to
15 emit an ultrasonic wave. The emitted ultrasonic wave
propagates in fluid and is received by the ultrasonic wave
transducer 501. The reception detecting circuit 504
outputs the received ultrasonic wave signal to the delay
20 section 533, such that the driver circuit operates in a
similar manner to that in a previous cycle and transmit an
ultrasonic wave signal again. The control section 507,
which has received an output signal from the reception
detecting circuit 504, counts such repetitious operation,
and when the count reaches a predetermined number of times,
25 the control section 507 stops the timer 505. The
calculation section 506 receives a time measurement result
of the timer 505 and calculates the flow rate.

25 The control section 507 receives a value of the
timer 505 and sets the delay time of the delay section 533
so as to always be constant. In this way, the control
section 507 controls the measurement such that the
measurement frequency is always constant. With such a
30 structure, the measurement frequency is always constant even
when a variation occurs in the propagation time. As a result,
noise which is in synchronization with a measurement
frequency or a transmission frequency of an ultrasonic wave
is always in the same phase when the ultrasonic wave is

received regardless of a variation in the propagation time. Therefore, a measurement error can be maintained as a constant value. Accordingly, the flow rate measurement can be stabilized even when the noise has a very long periodic noise.

The control section 507 controls the delay section 533 so as to maintain the measurement time to be constant. Therefore, the measurement frequency can be maintained to be constant with a simple calculation without calculating a propagation time for each ultrasonic wave transmission.

In embodiment 37, the measurement frequency is maintained to be constant by changing the delay time. However, the same effects can be obtained so long as the measurement frequency is constant. Specifically, the same effects can be obtained by using a different method, e.g., by changing the distance between the ultrasonic wave transducers.

Since a propagation time of an ultrasonic wave from upstream to downstream is different from a propagation time of an ultrasonic wave from downstream to upstream when there is a flow, a different delay can be set for stabilizing the measurement frequency.

Furthermore, when a flow rate is large, and an error caused by periodic noise is negligible, an operation of the periodicity stabilizing means is stopped, whereby the amount of consumed electric power can be reduced.

Furthermore, at an initial stage of measurement, the

flow rate is measured while changing the setting of the measurement frequency stabilizing means, whereby a measurement frequency with which a smallest variation is caused in a measurement result by a measurement frequency variation is set as a target measurement frequency. With such an arrangement, a further stable measurement result can be obtained.

INDUSTRIAL APPLICABILITY

As described above, according to a flowmeter of the present invention, the following effect can be obtained.

In order to solve the above problems, a flowmeter of the present invention includes: transmission/reception means provided in a flow path for performing transmission/reception using a state change of fluid; repetition means for repeating the transmission/reception; time measurement means for measuring a time or propagation repeated by the repetition means; flow rate detection means for detecting a flow rate based on a value of the time measurement means; and number-of-times change means for changing to a predetermined number of repetition times. The number of repetition times is changed to an optimum number such that an influence of a variation of a flow can be suppressed. As a result, reliable flow rate measurement with a high accuracy can be achieved.

The flowmeter includes a pair of transmission/reception means which utilize propagation of an ultrasonic wave as the state change of fluid. Thus, by using the sonic wave transmission/reception means, propagation of a sonic wave can be performed even when a

state change occurs in the fluid. Moreover, by changing the number of repetition times to an optimum number for the variation, reliable flow rate measurement with a high accuracy can be achieved.

5

The flowmeter includes transmission/reception means which utilizes propagation of heat as the state change of fluid. Thus, by using the heat transmission/reception means, propagation of heat can be performed even when a state change occurs in the fluid. Moreover, by changing the number of repetition times to an optimum number for the variation, reliable flow rate measurement with a high accuracy can be achieved.

15

The flowmeter includes: elapsed time detection means for detecting halfway information for a propagation time which is repeatedly measured by the repetition means; frequency detection means for detecting a frequency of a flow rate variation from information of the elapsed time detection means; and number-of-times change means for setting a measurement time so as to be substantially a multiple of the frequency detected by the frequency detection means. Thus, it is not necessary to provide specific detection means. Before flow rate detection is performed, the frequency of a variation is detected from halfway information of the time measurement means, and the measurement time can be set so as to be a multiple of a cycle of the frequency. As a result, reliable flow rate measurement with a high accuracy can be achieved.

30

The flowmeter includes: data holding means for holding at least one or more propagation time of repeatedly-performed transmission/reception which is

obtained by the elapsed time detection means; and frequency detection means for detecting a frequency by comparing the data held by the data holding means and measured propagation time data. Time measurement information at each moment is held and compared by the data holding means, whereby the frequency can be detected.

The number-of-times change means is operated in predetermined processing. Since the number-of-times change means is operated only when predetermined processing is performed, the processing in the number-of-times change means can be limited to the required minimum. Thus, the amount of consumed power can be considerably reduced.

The number-of-times change means is operated at each predetermined flow rate measurement. Thus, the number of repetition times is changed at every predetermined flow rate measurement, whereby the flow rate can be measured with a high accuracy in a stable manner even in a flow that varies greatly.

The number-of-times change means is performed before flow rate measurement processing. Since the number of repetition times is set to a predetermined number of times before flow rate measurement is performed, the flow rate measurement can be performed with a high accuracy in a reliable manner.

Predetermined processing includes operations of abnormality determination means for determining abnormality in flow rate from the measured flow rate; and flow rate management means for managing a use state for a flow rate from a measured flow rate. Since the number of

repetition times is changed only when the abnormality determination processing and the flow rate management processing are performed, the processing of changing the number of repetition times is limited to the required minimum.

5 Thus, the amount of consumed power can be decreased.

The number of repetition times which is adjusted the frequency obtained by the frequency detection means is used in next flow rate measurement. Since the number of repetition times is used in the next measurement, it is not necessary to perform repetitious measurement for frequency detection. Thus, the amount of consumed power can be decreased.

10

The number-of-times change means is operated when the measured flow rate is lower than a predetermined flow rate. Since the number of repetition times is changed only when the flow rate is equal to or lower than a predetermined flow rate, but this processing is not performed when the flow rate is high, the amount of consumed power can be decreased.

15

20

A flowmeter of the present invention includes: transmission/reception means provided in a flow path for performing transmission/reception using a state change of fluid; time measurement means for measuring a propagation time transmitted/received by the transmission/reception means; flow rate detection means for detecting a flow rate based on a value of the time measurement means; variation detection means for measuring a variation in the flow path by the transmission/reception means; and measurement control means for starting measurement in synchronization with a timing of a variation of the variation detection means.

25

30

Since a variation in the flow path is measured by transmission/reception means, it is not necessary to provide another sensor for detecting a variation. Thus, the size of the flowmeter can be decreased, and the structure of the flow path can be simplified. In addition, the flow rate can be measured with a high accuracy in a reliable manner within a short space of time even when a variation occurs.

The flowmeter includes a pair of transmission/reception means which utilize propagation of an ultrasonic wave as the state change of fluid. Thus, a state change of fluid can be detected by the sonic wave transmission/reception means. Accordingly, the measurement can be started in synchronization with a timing of variation. As a result, the flow rate can be measured with a high accuracy in a reliable manner.

The flowmeter includes transmission/reception means which utilizes propagation of heat as the state change of fluid. Thus, a state change of fluid can be detected by the heat transmission/reception means. Accordingly, the measurement can be started in synchronization with a timing of variation. As a result, the flow rate can be measured with a high accuracy in a reliable manner.

The flowmeter includes: first vibration means and second vibration means provided in a flow path for transmitting/receiving an sonic wave; switching means for switching an transmission/reception operation of the first vibration means and the second vibration means; variation detection means for detecting a pressure variation in a flow path at at least one of the first vibration means and the second vibration means; time measurement means for measuring

a propagation time of a sonic wave transmitted/received by the first vibration means and the second vibration means; measurement control means for performing synchronous control where, when an output of the variation detection means shows a predetermined change, the measurement means measures a first measurement time T1 of propagation from the first vibration means at an upstream side in the flow path to the second vibration means at a downstream side in the flow path, and when the output of the variation detection means shows a change opposite to the predetermined change, the measurement means measures a second measurement time T2 of propagation from the second vibration means at a downstream side in the flow path to the first vibration means at an upstream side in the flow path; flow rate detection means for calculating a flow rate using the first measurement time T1 and the second measurement time T2. Since the measurement is performed at a time when a change in a pressure variation is inverted, the phases of the pressure variation and the timing of the measurement can be shifted. As a result, a measurement error caused by a pressure variation can be offset.

The flowmeter includes: measurement control means for performing measurement control where measurement of the first measurement time T1 is started when an output of the variation detection means shows a predetermined change and measurement of the second measurement time T2 is started when the output of the variation detection means shows a change opposite to the predetermined change, and measurement control where, in a next measurement, measurement of the first measurement time T1 is started when the output of the variation detection means shows a change opposite to the predetermined change and measurement of the second

measurement time T2 is started when the output of the variation detection means shows the predetermined change; and flow rate calculation means for calculating the flow rate by successively averaging a first flow rate obtained by using the previous first measurement time T1 and previous second measurement time T2 while alternately changing start of measurement and a second flow rate obtained by using next first measurement time T1 and next second measurement time T2. Thus, the timing for measurement is changed as described above in order to perform measurement for the first measurement time T1 and the second measurement time T2. As a result, even when a pressure variation is asymmetrical between a high pressure side and a low pressure side, an influence of such a pressure variation can be offset.

The flowmeter includes repetition means for performing transmission/reception a plurality of times. Thus, averaging can be performed by increasing the number of times of measurement, and as a result, reliable flow rate measurement can be performed.

The flowmeter includes repetition means for performing transmission/reception a plurality of times over a time period which is a multiple of a variation cycle. Thus, a pressure variation can be averaged by measuring according to the variation frequency. As a result, a stable flow rate can be measured.

The flowmeter includes repetition means for starting transmission/reception measurement when an output of the variation detection means shows a predetermined change and repeating the transmission/reception measurement with a sonic wave until the output of the

variation detection means shows the same change as the predetermined change. Thus, the start and stop of the measurement can be made conformable to the frequency of a pressure variation. Therefore, a variation frequency can
5 be measured, and a pressure variation is averaged. As a result, a stable flow rate can be measured.

The flowmeter includes selection means for switching a case where the first vibration means and second vibration means are used for transmission/reception of a
10 sonic wave and a case where the first vibration means and second vibration means are used for detection of a pressure variation. Thus, at least one of the first vibration means and the second vibration means is used for pressure detection.
15 As a result, both the flow rate measurement and the pressure measurement can be simultaneously achieved.

The flowmeter includes variation detection means for detecting a component of an alternating component of a variation waveform which is in the vicinity of zero. Thus,
20 a variation is detected in the vicinity of a zero component of the variation, and hence the measurement can be started in the vicinity of zero variation within a time to perform flow rate measurement. Therefore, by performing the flow
25 rate measurement within a time when a variation is small, the measurement can be stabilized even when a variation occurs in a fluid.

The flowmeter includes: frequency detection means
30 for detecting the frequency of a signal of the variation detection means; and measurement control means for starting measurement only when the frequency detected by the frequency detection means is a predetermined frequency.

Thus, by starting the measurement only when the frequency is a predetermined frequency, measurement can be performed when a predetermined variation occurs. As a result, a stable flow rate can be measured.

5

The flowmeter includes detection cancellation means for automatically starting measurement after a predetermined time period when a signal of the variation detection means is not detected. Thus, even after a variation disappears, the flow rate can be automatically measured when a predetermined time arrives.

10

The transmission/reception means and the first and second vibration means include piezoelectric transducers. Thus, when the piezoelectric transducer is used, an ultrasonic wave is used for transmission/reception while a pressure variation can be detected.

15

A flowmeter of the present invention includes: transmission/reception means provided in a flow path for performing transmission/reception using a state change of fluid; repetition means for repeating signal propagation by the transmission/reception means; time measurement means for measuring a propagation time during repetition by the repetition means; flow rate detection means for detecting a flow rate based on a value of the time measurement means; variation detection means for detecting a fluid variation in a flow path; measurement control means for controlling each of the above means; and measurement monitoring means for monitoring abnormality in each of the above means. Thus, when there is a variation in a flow in the flow path, the flow rate is measured according to the variation, while abnormality can be quickly detected by the measurement

20

25

30

2025 RELEASE UNDER E.O. 14176

monitoring means. Accordingly, handling of abnormality can be correctly performed, and a measured value becomes stable. As a result, the flow rate can be measured with a high accuracy, and the reliability of the measurement can be improved.

5

The flowmeter includes a pair of transmission/reception means which utilize propagation of an ultrasonic wave as the state change of fluid. Since a sonic wave is used, the flow rate measurement can be performed even when there is a variation in fluid. Further, handling of abnormality can be correctly performed by the measurement monitoring means. As a result, the reliability of the measurement can be improved.

15

The flowmeter includes transmission/reception means which utilizes propagation of heat as the state change of fluid. Since heat propagation is used, the flow rate measurement can be performed even when there is a variation in fluid. Further, handling of abnormality can be correctly performed by the measurement monitoring means. As a result, the reliability of the measurement can be improved.

20

The flowmeter includes: a pair of transmission/reception means provided in a flow path for transmitting/receiving a sonic wave; repetition means for repeating signal propagation of the transmission/reception means; time measurement means for measuring a propagation time of a sonic wave during the repetition by the repetition means; flow rate detection means for detecting the flow rate based on a value of the time measurement means; variation detection means for detecting a fluid variation in a flow path; measurement control means for controlling each of the above means; and measurement monitoring means for monitoring

30

abnormality in a start signal which directs start of transmission of a sonic wave at a first output signal of the variation detection means after a measurement direction signal of the measurement control means, and abnormality in an end signal which directs end of repetition of the transmission/reception of the sonic wave at second output signal of the variation detection means. Thus, when there is a variation in fluid in the flow path, the measurement can be performed in synchronization with the frequency of the variation, and abnormality can be detected by the measurement monitoring means. Therefore, a flow rate can be measured with a high accuracy, and a reliable measured value can be obtained. In addition, handling of abnormality can be correctly performed, and the reliability of the measured flow rate value can be improved.

The flowmeter includes measurement monitoring means for directing a start of transmission of a sonic wave after a predetermined time when a start signal is not generated within a predetermined time period after a direction of the measurement control means. Thus, even when there is no variation, and there is no start signal within a predetermined time period, the flow rate can be measured at every predetermined time, and loss of data can be prevented.

The flowmeter includes measurement monitoring means for directing start of transmission of a sonic wave after a predetermined time when a start signal is not generated within a predetermined time period after a direction of the measurement control means, and for performing measurement a predetermined number of repetition times. Thus, even when there is no variation, and there is no start signal within

a predetermined time period, the flow rate can be measured for a predetermined number of repetition times at every predetermined time, and loss of data can be prevented.

5 The flowmeter includes measurement monitoring means which does not perform measurement until a next direction of the measurement control means when a start signal is not generated within a predetermined time period after a direction of the measurement control means. By suspending
10 the operation until a next measurement direction, unnecessary measurement is not performed, whereby the amount of consumed power can be decreased.

15 The flowmeter includes measurement monitoring means which terminates reception of a sonic wave when an end signal is not generated within a predetermined time after a start signal. Since the reception of the sonic wave is forcibly terminated, the measurement is not suspended while waiting for the end signal. Thus, the measurement can proceed to
20 a next process, and a stable measurement operation can be performed.

25 The flowmeter includes measurement monitoring means which terminates reception of a sonic wave and outputs a start signal again, when an end signal is not generated within a predetermined time after a start signal. Since the reception of the sonic wave is forcibly terminated, the measurement is not suspended while waiting for the end signal. Further, a start signal is output again so as to perform
30 re-measurement. Thus, a stable measurement operation can be performed.

 The flowmeter includes measurement monitoring means

for stopping transmission/reception processing when abnormality occurs in the number of repetition times. Since the measurement is stopped when the number of repetition times is abnormal, only data with a high accuracy can be
5 used to perform flow rate measurement.

The flowmeter includes measurement monitoring means which compares a first number of repetition times for measurement where a sonic wave is transmitted from a first
10 one of the pair of transmission/reception means and received by the second transmission/reception means and a second number of repetition times for measurement where a sonic wave is transmitted from the second transmission/reception means and received by the first transmission/reception means,
15 and again outputs a start signal when the difference between the first and second numbers of repetition times is equal to or greater than a predetermined number of times. Thus, re-measurement is performed when the number of repetition times is greatly different, whereby measurement with a high
20 accuracy can be performed with a stable variation frequency.

The flowmeter includes repetition means for setting the number of repetition times such that a first number of repetition times for measurement where a sonic wave is
25 transmitted from first one of the pair of transmission/reception means and received by the second transmission/reception means is equal to a second number of repetition times for measurement where a sonic wave is transmitted from the second transmission/reception means
30 and received by the first transmission/reception means. Thus, by employing the same number of repetition times, a predetermined flow rate measurement can be performed even when a variation frequency is unstable.

5 The flowmeter includes measurement monitoring means for monitoring the number of times that a start signal is output again so as to be limited to a predetermined number of times or less, such that the outputting of the start signal is not permanently repeated. Thus, by limiting the number of times of re-measurement, the processing is prevented from continuing permanently. As a result, stable flow rate measurement can be performed.

10 The flowmeter measures a flow rate from a difference between inverse numbers of propagation times measured while repeating transmission/reception of an ultrasonic wave a plurality of number of times. Thus, when an ultrasonic wave is used, transmission/reception can be performed without being affected by a variation frequency in the flow path. Further, the flow rate is measured from the difference of inverse numbers of propagation times which are measured while repeating the transmission/reception, whereby even a variation of a long cycle can be measured by units of one cycle. In addition, the difference of the propagation times which is caused by a variation can be offset by using the difference of inverse numbers.

25 A flowmeter of the present invention includes: instantaneous flow rate detection means for detecting an instantaneous flow rate; fluctuation determination means for determining whether or not there is a pulse in a flow rate value; and at least one or more stable flow rate calculation means for calculating a flow rate value using different means according to a determination result of the fluctuation determination means. Thus, by determining a variation in a measured flow rate and switching the flow

30

rate calculation means, the flow rate can be calculated by one flow rate measurement means according to the amount of the variation in a reliable manner.

5 A flowmeter of the present invention includes:
instantaneous flow rate detection means for detecting an
instantaneous flow rate; filter processing means for
performing digital-filter processing of a flow rate value;
and stable flow rate calculation means for calculating a
10 flow rate value using the filter processing means. Thus,
when the digital filter processing is performed, a
calculation equivalent to an averaging process can be
performed without using a large number of memories for
storing data. Moreover, the filter characteristic can be
15 modified by changing one variable, i.e., a filter
coefficient.

 The flowmeter includes stable flow rate calculation
means for calculating a stable flow rate value using the
20 digital filter processing means when the fluctuation
determination means determines that there is a pulse. Thus,
when a pulse occurs, a sharp filter characteristic is
selected so as to render a large pulse stable, and the filter
processing can be performed only when a pulse occurs.

25 The fluctuation determination means determines
whether or not a variation amplitude of a flow rate value
is equal to or greater than a predetermined value. Thus,
a pulse can be determined based on the variation amplitude
30 of the pulse, whereby the filter processing can be modified
according to the variation amplitude of the pulse.

 The filter processing means modifies a filter

characteristic according to a variation amplitude of a flow rate value. Since the filter characteristic is changed according to the variation amplitude of a flow rate value, the filter characteristic can be quickly modified so as to be a sufficiently relaxed filter characteristic that allows a variation according to a variation in a flow rate when the variation is small, and when the variation is large, a sharp filter characteristic is selected such that a variation of the flow rate due to a pulse can be significantly suppressed.

The filter processing is performed only when a flow rate value detected by the instantaneous flow rate detection means is low. Since the filter processing is performed only when the flow rate is low, a variation of the flow rate can be quickly handled when the flow rate is high, and an influence of fluctuation which is caused when the flow rate is low can be significantly suppressed.

Filter processing means modifies a filter characteristic according to a flow rate value. Since the filter characteristic is changed according to the flow rate value, filter processing is performed only when the flow rate is low, a variation of the flow rate can be quickly handled when the flow rate is high, and an influence of fluctuation which is caused when the flow rate is low can be significantly suppressed.

Filter processing means modifies a filter characteristic according to an interval of a measurement time of the instantaneous flow rate detection means. Thus, by changing the filter characteristic according to an interval of the flow rate detection time, the variation can

be suppressed with a relaxed filter characteristic when the measurement interval is short or with a sharp filter characteristic when the measurement interval is long.

5 The flowmeter includes filter processing means which modifies a filter characteristic such that a cut-off frequency of the filter characteristic becomes high when the flow rate is high, and which modifies a filter characteristic such that the filter characteristic has a
10 low cut-off frequency when the flow rate is low. Thus, the response characteristic is increased when the flow rate is high, and the fluctuation is suppressed when the flow rate is low.

15 A filter characteristic is modified such that a variation amplitude of a flow rate value calculated by the stable flow rate calculation means is within a predetermined value range. Since the filter characteristic is modified such that the variation amplitude is within a predetermined
20 value range, the flow rate variation can be suppressed so as to be always equal to or smaller than a predetermined value.

25 An ultrasonic wave flowmeter which detects a flow rate by using an ultrasonic wave is used as the instantaneous flow rate detection means. Thus, by using an ultrasonic wave flowmeter, an instantaneous flow rate can be measured even when a large flow rate variation occurs. Thus, from the flow rate value, a stable flow rate can be calculated.

30 A heat-based flowmeter is used as the instantaneous flow rate detection means. When the heat-based flowmeter is used, an instantaneous flow rate can be measured even

when a large flow rate variation occurs. Thus, a stable flow rate can be calculated from the flow rate value.

Further, the control section controls the
5 periodicity change means so as to sequentially change the frequency of the measurement in the flow rate measurement such that the frequency of the measurement is not kept constant. Thus, noise which is in synchronization with a measurement frequency or a transmission frequency of an
10 ultrasonic wave is never in the same phase but dispersed when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

Furthermore, the flowmeter of the present invention
15 includes periodicity change means for sequentially changing the driving method of the driver circuit. In response to receipt of an output of the reception detecting circuit, the control section modifies the periodicity change means every time the reception detecting circuit detects a receipt
20 of an ultrasonic wave such that the frequency of the measurement is not kept constant. Thus, the periodicity change means can be operated with a plurality of settings for measurement within one flow rate measurement cycle. As a result, noise is dispersively averaged in a measurement
25 result, and a reliable measurement result can be obtained.

The periodicity change means switchingly outputs a plurality of output signals having different frequencies; and the control section changes a frequency setting of the
30 periodicity change means at every measurement so as to change a driving frequency of the driver circuit. Thus, by changing the driving frequency, the reception detecting timing can be changed by a time corresponding to a frequency variation

of a driving signal. Thus, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

The periodicity change means outputs output signals having the same frequency and a plurality of different phases; and the control section operates such that a phase setting for the output signal of the periodicity change means is changed at every measurement and a driving phase of the driver circuit is changed. Thus, by changing the driving phase, the reception detecting timing can be changed by a time corresponding to a phase variation of a driving signal. Thus, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

The periodicity change means outputs a synthesized signal obtained by superposing a signal of a first frequency which is an operation frequency of the ultrasonic wave transducers and a signal of a second frequency which is different from the first frequency; and the control section outputs, through the driver circuit, at every measurement, an output signal where the second frequency of the periodicity change means is changed. Thus, the periodicity of the flow rate measurement can be disturbed. As a result, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed when the ultrasonic wave is received. Therefore, a measurement error can be

decreased.

The periodicity change means switches the setting between a case where there is a second frequency and a case where there is not a second frequency. Thus, since the reception detecting timing is changed by changing the vibration of the ultrasonic wave transducer that transmits an ultrasonic wave, the periodicity of the flow rate measurement can be disturbed. As a result, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

The periodicity change means changes the phase setting of the second frequency. Thus, since the reception detecting timing is changed by changing the vibration of the ultrasonic wave transducer that transmits an ultrasonic wave, the periodicity of the flow rate measurement can be disturbed. As a result, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed/averaged when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

The periodicity change means changes the frequency setting of the second frequency. Thus, since the reception detecting timing is changed by changing the vibration of the ultrasonic wave transducer that transmits an ultrasonic wave, the periodicity of the flow rate measurement can be disturbed. As a result, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is never in the same phase but dispersed

when the ultrasonic wave is received. Therefore, a measurement error can be decreased.

5 The periodicity change means includes a delay
section capable of setting different delay times; and the
control section changes the setting of the delay at each
transmission of an ultrasonic wave or at each receipt
detection of an ultrasonic wave. Thus, in one measurement
operation, reverberation of an ultrasonic wave transmitted
10 in an immediately-previous measurement and an influence of
tailing of the ultrasonic wave transducers can be dispersed,
whereby a measurement error can be decreased.

15 The cycle width changed by the periodicity change
means is a multiple of a value corresponding to a variation
of a propagation time which is caused by a measurement error.
Thus, when the measured values for all the settings are
summed up and averaged, an error can be suppressed to a
minimum.

20 The cycle width changed by the periodicity change
means is equal to a cycle of a resonance frequency of the
ultrasonic wave transducers. Thus, in a value obtained by
summing up and averaging the measured values for all the
25 settings, a measurement error which may be caused by
reverberation of an ultrasonic wave or tailing of the
ultrasonic wave transducers is minimum. Thus, the
measurement error can be decreased.

30 The order of patterns for changing the periodicity
is the same for both measurement in a upstream direction
and measurement in a downstream direction. Thus, the
measurement with an ultrasonic wave transmitted toward the

upstream side and the measurement with an ultrasonic wave transmitted toward the downstream side are always performed under the same conditions. Hence, even when there is a variation in the flow rate, a reliable measurement result can be obtained.

The predetermined number of times is a multiple of a change number of the periodicity change means. Thus, all the setting values of the periodicity change means are uniformly set within a single flow rate measurement operation. As a result, a reliable measurement result can be obtained.

Further, a time period from receipt detection to a next count-up time is measured by a second timer, whereby measurement can be performed with a resolution higher than that of a first timer. Furthermore, the amount of consumed power can be decreased in comparison to a flowmeter having the same resolution, because it is necessary to operate the second timer for only a short time period after the receipt detection.

Furthermore, since the second timer is corrected by the first timer, the second timer only needs to possess a short-term stability. Thus, it is not necessary to use a special part. Therefore, a flowmeter with high resolution can be readily realized.

Furthermore, since the second timer is corrected by the first timer when an output of a temperature sensor varies so as to be equal to or greater than a set value, the flowmeter of the present invention can be used even when the second timer has a characteristic which varies according to a

variation of temperature.

Further still, since the second timer is corrected by the first timer when an output of a voltage sensor varies so as to be equal to or greater than a set value, the flowmeter of the present invention can be used even when the second timer has a characteristic which varies according to a variation of voltage.

A flowmeter of the present invention includes: a flow rate measurement section through which fluid to be measured flows; a pair of ultrasonic wave transducers provided in the flow rate measurement section for transmitting/receiving an ultrasonic wave; a driver circuit for driving one of the ultrasonic wave transducers; a reception detecting circuit connected to the other ultrasonic wave transducer for detecting an ultrasonic wave signal; a control section for controlling the driver circuit for a predetermined number of times so as to drive the ultrasonic wave transducers again in response to an output of the reception detecting circuit; a timer for measuring an elapsed time for the predetermined number of times; a calculation section for calculating a flow rate from an output of the timer; and periodicity stabilizing means for sequentially changing a driving method of the driver circuit, wherein the control section controls the periodicity stabilizing means such that a measurement frequency is always maintained to be constant. With this structure, the measurement frequency is always constant even when a propagation time varies. Thus, noise which is in synchronization with a measurement frequency or a transmission frequency of an ultrasonic wave is always in the same phase when the ultrasonic wave is received

regardless of a variation in the propagation time. Therefore, a measurement error can be maintained as a constant value. Accordingly, the flow rate measurement can be stabilized even when the noise has a very long periodic noise.

The control section includes periodicity stabilizing means formed by a delay section capable of setting different delay times; and the control section changes an output timing of the driver circuit by switching the delay times. Since the measurement frequency is maintained to be constant by changing the delay time, the measurement frequency can be stabilized without giving an influence to driving of the ultrasonic wave transducers.

The control section controls the driver circuit such that a measurement time is maintained to be constant. Thus, the measurement frequency can be maintained to be constant with a simple calculation without calculating a propagation time for each ultrasonic wave transmission.

CLAIMS

1. A flowmeter, comprising: transmission/reception means provided in a flow path for performing
5 transmission/reception using a state change of fluid; repetition means for repeating signal propagation with the transmission/reception means; time measurement means for measuring a propagation time of a state change during repetition by the repetition means; flow rate detection
10 means for detecting a flow rate based on a value of the time measurement means; and number-of-times change means for changing to a predetermined number of repetition times.
2. A flowmeter according to claim 1, comprising a pair of
15 transmission/reception means which utilize propagation of an ultrasonic wave as the state change of fluid.
3. A flowmeter according to claim 1, comprising
20 transmission/reception means which utilizes propagation of heat as the state change of fluid.
4. A flowmeter according to any of claims 1-3, comprising
25 elapsed time detection means for detecting halfway information for a time of propagation repeated by the repetition means; frequency detection means for detecting a frequency of a flow rate variation from information of the elapsed time detection means; and number-of-times change
30 means for setting a measurement time so as to be substantially a multiple of the frequency detected by the frequency detection means.
5. A flowmeter according to claim 4, comprising data holding means for holding at least one or more propagation time of

transmission/reception which is obtained by the elapsed time detection means; and frequency detection means for detecting a frequency by comparing the data held by the data holding means and measured propagation time data.

5

6. A flowmeter according to any of claims 1-5, wherein the number-of-times change means is operated in predetermined processing.

10

7. A flowmeter according to claim 6, wherein the number-of-times change means is operated at each predetermined flow rate measurement.

15

8. A flowmeter according to claim 6, wherein the number-of-times change means is performed before flow rate measurement processing.

20

9. A flowmeter according to claim 6, wherein predetermined processing includes operations of abnormality determination means for determining abnormality in flow rate from flow rate measurement; and flow rate management means for managing a use state for a flow rate from a measured flow rate.

25

10. A flowmeter according to any of claims 4-9, wherein the number of repetition times which is adjusted to the frequency obtained by the frequency detection means is used in next flow rate measurement.

30

11. A flowmeter according to any of claims 1-5, wherein the number-of-times change means is operated when the measured flow rate is lower than a predetermined flow rate.

12. A flowmeter, comprising: transmission/reception means provided in a flow path for performing transmission/reception using a state change of fluid; time measurement means for measuring a propagation time of a state change transmitted/received by the transmission/reception means; flow rate detection means for detecting a flow rate based on a value of the time measurement means; variation detection means for measuring a variation in the flow path by the transmission/reception means; and measurement control means for starting measurement in synchronization with a timing of a variation of the variation detection means.

13. A flowmeter according to claim 12, comprising a pair of transmission/reception means which utilize propagation of an ultrasonic wave as the state change of fluid.

14. A flowmeter according to claim 12, comprising transmission/reception means which utilizes propagation of heat as the state change of fluid.

15. A flowmeter according to claim 13, comprising: first vibration means and second vibration means provided in a flow path for transmitting/receiving an sonic wave; switching means for switching an transmission/reception operation of the first vibration means and the second vibration means; variation detection means for detecting a pressure variation in a flow path at at least one of the first vibration means and the second vibration means; time measurement means for measuring a propagation time of a sonic wave transmitted/received by the first vibration means and the second vibration means; measurement control means for performing synchronous control where, when an output of the

variation detection means shows a predetermined change, the measurement means measures a first measurement time T1 of propagation from the first vibration means at an upstream side in the flow path to the second vibration means at a downstream side in the flow path, and when the output of the variation detection means shows a change opposite to the predetermined change, the measurement means measures a second measurement time T2 of propagation from the second vibration means at a downstream side in the flow path to the first vibration means at an upstream side in the flow path; flow rate detection means for calculating a flow rate using the first measurement time T1 and the second measurement time T2.

16. A flowmeter according to claim 15, comprising: measurement control means for performing measurement control where measurement of the first measurement time T1 is started when an output of the variation detection means shows a predetermined change and measurement of the second measurement time T2 is started when the output of the variation detection means shows a change opposite to the predetermined change, and measurement control where, in a next measurement, measurement of the first measurement time T1 is started when the output of the variation detection means shows a change opposite to the predetermined change and measurement of the second measurement time T2 is started when the output of the variation detection means shows the predetermined change; and flow rate calculation means for calculating the flow rate by successively averaging a first flow rate obtained by using the previous first measurement time T1 and previous second measurement time T2 while alternately changing start of measurement and a second flow rate obtained by using next first measurement time T1 and

next second measurement time T2.

17. A flowmeter according to any one of claims 12-16,
comprising repetition means for performing
5 transmission/reception a plurality of times.

18. A flowmeter according to claim 17, comprising
repetition means for performing transmission/reception a
plurality of times over a time period which is a multiple
10 of a variation cycle.

19. A flowmeter according to claim 18, comprising
repetition means for starting transmission/reception
measurement when an output of the variation detection means
15 shows a predetermined change and repeating the
transmission/reception measurement until the output of the
variation detection means shows the same change as the
predetermined change.

20. A flowmeter according to any one of claims 12 and 15-19,
comprising selection means for switching a case where the
first vibration means and second vibration means are used
for transmission/reception of a sonic wave and a case where
the first vibration means and second vibration means are
25 used for detection of a pressure variation.

21. A flowmeter according to any one of claims 15-20,
comprising variation detection means for detecting a
component of an alternating component of a variation
30 waveform which is in the vicinity of zero.

22. A flowmeter according to any one of claims 15-21,
comprising: frequency detection means for detecting the

frequency of a signal of the variation detection means; and measurement control means for starting measurement only when the frequency detected by the frequency detection means is a predetermined frequency.

5

23. A flowmeter according to any one of claims 15-22, comprising detection cancellation means for automatically starting measurement after a predetermined time period when a signal of the variation detection means is not detected.

10

24. A flowmeter according to any one of claims 15-23, wherein the transmission/reception means and the first and second vibration means include piezoelectric transducers.

15

25. A flowmeter, comprising: transmission/reception means provided in a flow path for performing transmission/reception using a state change of fluid; repetition means for repeating the transmission/reception; time measurement means for measuring a propagation time during repetition by the repetition means; flow rate detection means for detecting a flow rate based on a value of the time measurement means; variation detection means for detecting a fluid variation in a flow path; measurement control means for controlling each of the above means; and measurement monitoring means for monitoring abnormality in each of the above means.

20

25

30

26. A flowmeter according to claim 25, comprising a pair of transmission/reception means which utilize propagation of an ultrasonic wave as the state change of fluid.

27. A flowmeter according to claim 25, comprising transmission/reception means which utilizes propagation of

heat as the state change of fluid.

5 28. A flowmeter according to claim 26, comprising: a pair
of transmission/reception means provided in a flow path for
transmitting/receiving a sonic wave; repetition means for
repeating signal propagation of the transmission/reception
means; time measurement means for measuring a propagation
10 time of a sonic wave during the repetition by the repetition
means; flow rate detection means for detecting the flow rate
based on a value of the time measurement means; variation
detection means for detecting a fluid variation in a flow
path; measurement control means for controlling each of the
above means; and measurement monitoring means for monitoring
15 abnormality in a start signal which directs start of
transmission of a sonic wave at a first output signal of
the variation detection means after a measurement direction
signal of the measurement control means, and abnormality
in an end signal which directs end of repetition of the
transmission/reception of the sonic wave at second output
20 signal of the variation detection means.

29. A flowmeter according to claim 28, comprising
measurement monitoring means for directing a start of
transmission of a sonic wave after a predetermined time when
25 a start signal is not generated within a predetermined time
period after a direction of the measurement control means.

30. A flowmeter according to claim 29, comprising
measurement monitoring means for directing start of
transmission of a sonic wave after a predetermined time when
30 a start signal is not generated within a predetermined time
period after a direction of the measurement control means,
and for performing measurement a predetermined number of

repetition times.

31. A flowmeter according to claim 28, comprising measurement monitoring means which does not perform measurement until a next direction of the measurement control means when a start signal is not generated within a predetermined time period after a direction of the measurement control means.

32. A flowmeter according to claim 28, comprising measurement monitoring means which terminates reception of a sonic wave when an end signal is not generated within a predetermined time after a start signal.

33. A flowmeter according to one of claims 28 and 32, comprising measurement monitoring means which terminates reception of a sonic wave and outputs a start signal again, when an end signal is not generated within a predetermined time after a start signal.

34. A flowmeter according to claim 28, comprising measurement monitoring means for stopping transmission/reception processing when abnormality occurs in the number of repetition times.

35. A flowmeter according to claim 28, comprising measurement monitoring means which compares a first number of repetition times for measurement where a sonic wave is transmitted from a first one of the pair of transmission/reception means and received by the second transmission/reception means and a second number of repetition times for measurement where a sonic wave is transmitted from the second transmission/reception means

and received by the first transmission/reception means, and again outputs a start signal when the difference between the first and second numbers of repetition times is equal to or greater than a predetermined number of times.

5

36. A flowmeter according to claim 28, comprising repetition means for setting the number of repetition times such that a first number of repetition times for measurement where a sonic wave is transmitted from first one of the pair of transmission/reception means and received by the second transmission/reception means is equal to a second number of repetition times for measurement where a sonic wave is transmitted from the second transmission/reception means and received by the first transmission/reception means.

10
15

37. A flowmeter according to claim 28, comprising measurement monitoring means for monitoring the number of times that a start signal is output again so as to be limited to a predetermined number of times or less, such that the outputting of the start signal is not permanently repeated.

20

38. A flowmeter according to any one of claims 28-37, wherein the flowmeter measures a flow rate from a difference between inverse numbers of propagation times measured while repeating transmission/reception of an ultrasonic wave a plurality of number of times.

25

39. A flowmeter, comprising: instantaneous flow rate detection means for detecting an instantaneous flow rate; fluctuation determination means for determining whether or not there is a pulse in a flow rate value; and at least one or more stable flow rate calculation means for calculating a flow rate value using different means according to a

30

determination result of the fluctuation determination means.

5 40. A flowmeter, comprising: instantaneous flow rate detection means for detecting an instantaneous flow rate; filter processing means for performing digital-filter processing of a flow rate value; and stable flow rate calculation means for calculating a flow rate value using the filter processing means.

10 41. A flowmeter according to any one of claims 39 and 40, comprising stable flow rate calculation means for calculating a stable flow rate value using the digital filter processing means when the fluctuation determination means determines that there is a pulse.

15 42. A flowmeter according to any one of claims 38-41, wherein the fluctuation determination means determines whether or not a variation amplitude of a flow rate value is equal to or greater than a predetermined value.

20 43. A flowmeter according to any one of claims 39-42, wherein the filter processing means modifies a filter characteristic according to a variation amplitude of a flow rate value.

25 44. A flowmeter according to any one of claims 39-43, wherein the filter processing is performed only when a flow rate value detected by the instantaneous flow rate detection means is low.

30 45. A flowmeter according to any one of claims 39-44, wherein filter processing means modifies a filter

characteristic according to a flow rate value.

5 46. A flowmeter according to any one of claims 39-45,
wherein filter processing means modifies a filter
characteristic according to an interval of a measurement
time of the instantaneous flow rate detection means.

10 47. A flowmeter according to claim 46, comprising filter
processing means which modifies a filter characteristic such
that a cut-off frequency of the filter characteristic
becomes high when the flow rate is high, and which modifies
a filter characteristic such that the filter characteristic
has a low cut-off frequency when the flow rate is low.

15 48. A flowmeter according to any one of claims 39-47,
wherein a filter characteristic is modified such that a
variation amplitude of a flow rate value calculated by the
stable flow rate calculation means is within a predetermined
value range.

20 49. A flowmeter according to any one of claims 38-48,
wherein an ultrasonic wave flowmeter which detects a flow
rate by using an ultrasonic wave is used as the instantaneous
flow rate detection means.

25 50. A flowmeter according to any one of claims 38-48,
wherein a heat-based flowmeter is used as the instantaneous
flow rate detection means.

30 51. A flowmeter, comprising: a flow rate measurement section
through which fluid to be measured flows; a pair of
ultrasonic wave transducers provided in the flow rate
measurement section for transmitting/receiving an

ultrasonic wave; a driver circuit for driving one of the ultrasonic wave transducers; a reception detecting circuit connected to the other ultrasonic wave transducer for detecting an ultrasonic wave pulse; a timer for measuring a propagation time of the ultrasonic wave pulse; a control section for controlling the driver circuit; a calculation section for calculating a flow rate from an output of the timer; and periodicity change means for sequentially changing a driving method of the driver circuit, wherein the control section controls the periodicity change means such that the frequency of flow rate measurement is sequentially changed.

52. A flowmeter, comprising: a flow rate measurement section through which fluid to be measured flows; a pair of ultrasonic wave transducers provided in the flow rate measurement section for transmitting/receiving an ultrasonic wave; a driver circuit for driving one of the ultrasonic wave transducers; a reception detecting circuit connected to the other ultrasonic wave transducer for detecting an ultrasonic wave pulse; a control section for controlling the driver circuit for a predetermined number of times so as to drive the ultrasonic wave transducers again in response to an output of the reception detecting circuit; a timer for measuring an elapsed time for the predetermined number of times; a calculation section for calculating a flow rate from an output of the timer; and periodicity change means for sequentially changing a driving method of the driver circuit, wherein, in response to receipt of an output of the reception detecting circuit, the control section changes the periodicity change means at every receipt detection of the reception detecting circuit.

53. A flowmeter according to claims 51 and 52, wherein: the periodicity change means switchingly outputs a plurality of output signals having different frequencies; and the control section changes a frequency setting of the periodicity change means at every measurement so as to change a driving frequency of the driver circuit.

54. A flowmeter according to claims 51 and 52, wherein: the periodicity change means outputs output signals having the same frequency and a plurality of different phases; and the control section operates such that a phase setting for the output signal of the periodicity change means is changed at every measurement and a driving phase of the driver circuit is changed.

55. A flowmeter according to claims 51 and 52, wherein: the periodicity change means outputs a synthesized signal obtained by superposing a signal of a first frequency which is an operation frequency of the ultrasonic wave transducers and a signal of a second frequency which is different from the first frequency; and the control section outputs, through the driver circuit, at every measurement, an output signal where the second frequency of the periodicity change means is changed.

56. A flowmeter according to claim 55, wherein the periodicity change means changes the setting between a case where there is a second frequency and a case where there is not a second frequency.

57. A flowmeter according to claim 55, wherein the periodicity change means changes the phase setting of the second frequency.

58. A flowmeter according to claim 55, wherein the periodicity change means changes the frequency setting of the second frequency.

5
59. A flowmeter according to claim 52, wherein: the periodicity change means includes a delay section capable of setting different delay times; and the control section changes the setting of the delay at each transmission of
10 an ultrasonic wave or at each receipt detection of an ultrasonic wave.

60. A flowmeter according to claims 51 and 52, wherein the cycle width changed by the periodicity change means is a
15 multiple of a value corresponding to a variation of a propagation time which is caused by a measurement error.

61. A flowmeter according to claims 51 and 52, wherein the cycle width changed by the periodicity change means is equal
20 to a cycle of a resonance frequency of the ultrasonic wave transducers.

62. A flowmeter according to claims 51 and 52, wherein the order of patterns for changing the periodicity is the same
25 for both measurement in a upstream direction and measurement in a downstream direction.

63. A flowmeter according to claim 52, wherein the predetermined number of times is a multiple of a change
30 number of the periodicity change means.

64. A flowmeter, comprising: a flow rate measurement section through which fluid to be measured flows; a pair of

ultrasonic wave transducers provided in the flow rate measurement section for transmitting/receiving an ultrasonic wave; a driver circuit for driving one of the ultrasonic wave transducers; a reception detecting circuit connected to the other ultrasonic wave transducer for detecting an ultrasonic wave pulse; a first timer for measuring a propagation time of the ultrasonic wave pulse; a second timer for measuring a time period from when the reception detecting circuit detects a receipt to when a value of the first timer changes; a control section for controlling the driver circuit; and a calculation section for calculating a flow rate from outputs of the first timer and second timer, wherein the second timer is corrected by the first timer.

65. A flowmeter according to claim 64, comprising a temperature sensor, wherein the second timer is corrected by the first timer when an output of the temperature sensor varies so as to be equal to or greater than a set value.

66. A flowmeter according to claim 64, comprising a voltage sensor, wherein the second timer is corrected by the first timer when an output of the voltage sensor varies so as to be equal to or greater than a set value.

67. A flowmeter, comprising: a flow rate measurement section through which fluid to be measured flows; a pair of ultrasonic wave transducers provided in the flow rate measurement section for transmitting/receiving an ultrasonic wave; a driver circuit for driving one of the ultrasonic wave transducers; a reception detecting circuit connected to the other ultrasonic wave transducer for detecting an ultrasonic wave pulse; a control section for

controlling the driver circuit for a predetermined number of times so as to drive the ultrasonic wave transducers again in response to an output of the reception detecting circuit; a timer for measuring an elapsed time for the predetermined number of times; a calculation section for calculating a flow rate from an output of the timer; and periodicity stabilizing means for sequentially changing a driving method of the driver circuit, wherein the control section controls the periodicity stabilizing means such that a measurement frequency is always maintained to be constant.

68. A flowmeter according to claim 67, wherein: the control section includes periodicity stabilizing means formed by a delay section capable of setting different delay times; and the control section changes an output timing of the driver circuit by switching the delay times.

69. A flowmeter according to claim 67, wherein the control section controls the driver circuit such that a measurement time is maintained to be constant.

ABSTRACT

For the purpose of solving the above problems, the present invention includes: transmission/reception means
5 provided in a flow path for performing transmission/reception using a state change of fluid; repetition means for repeating the transmission/reception; time measurement means for measuring a time of propagation repeated by the repetition means; flow rate detection means
10 for detecting a flow rate based on a value of the time measurement means; and number-of-times change means for changing to a predetermined number of repetition times. With such a structure, an influence caused by a variation of a flow can be suppressed by changing the number of
15 repetition times so as to be suitable for a variation. As a result, reliable flow rate measurement with a high accuracy can be achieved.

1/65

FIG. 1



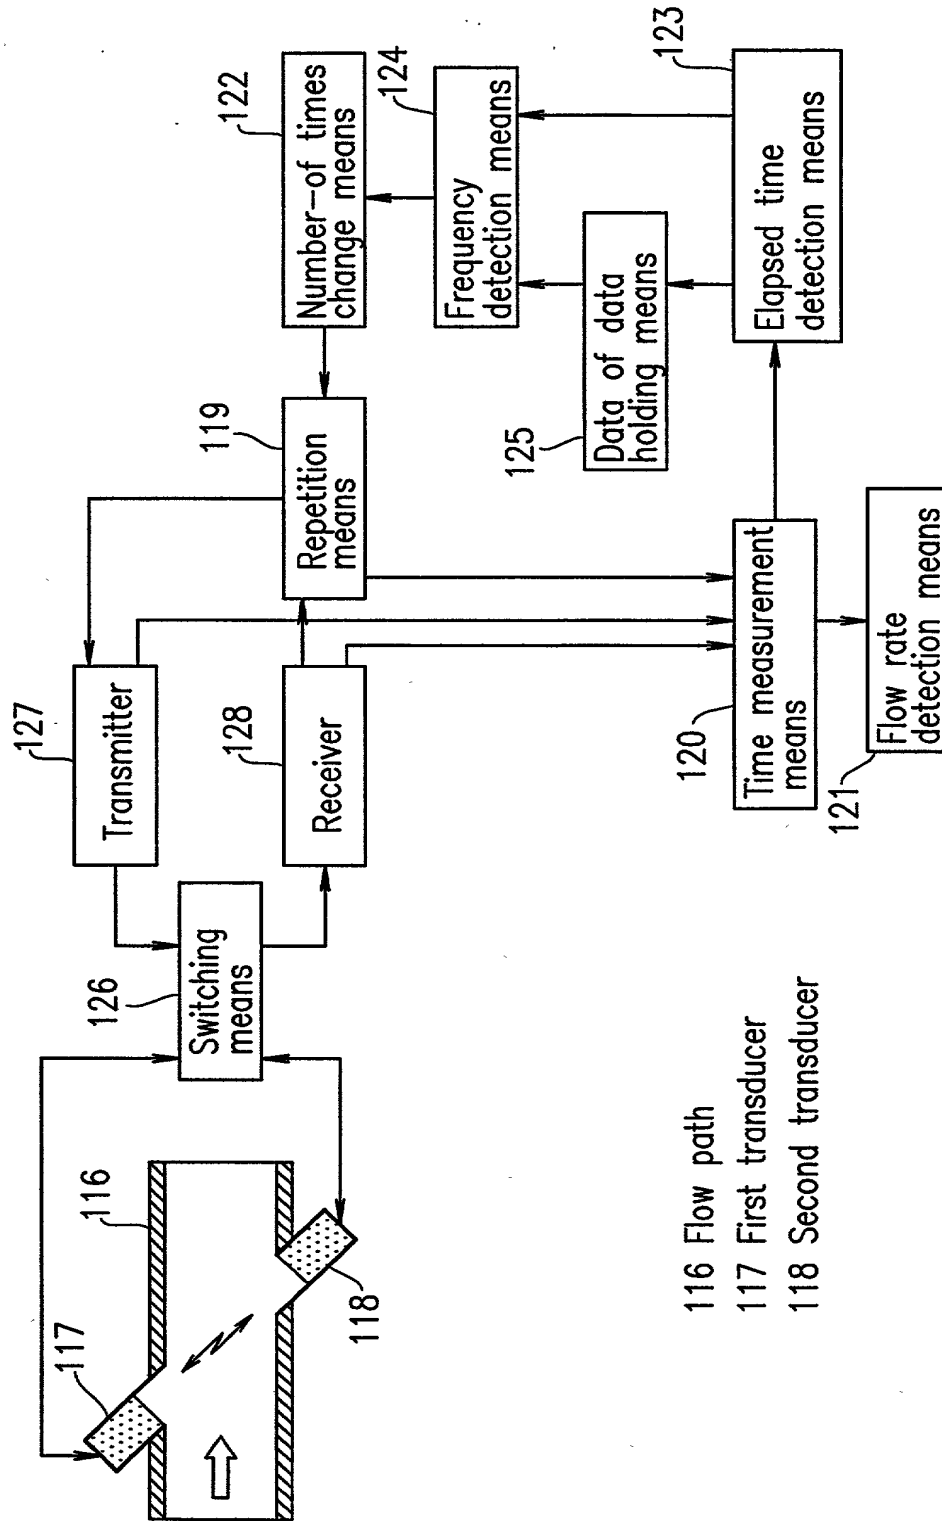


FIG. 2

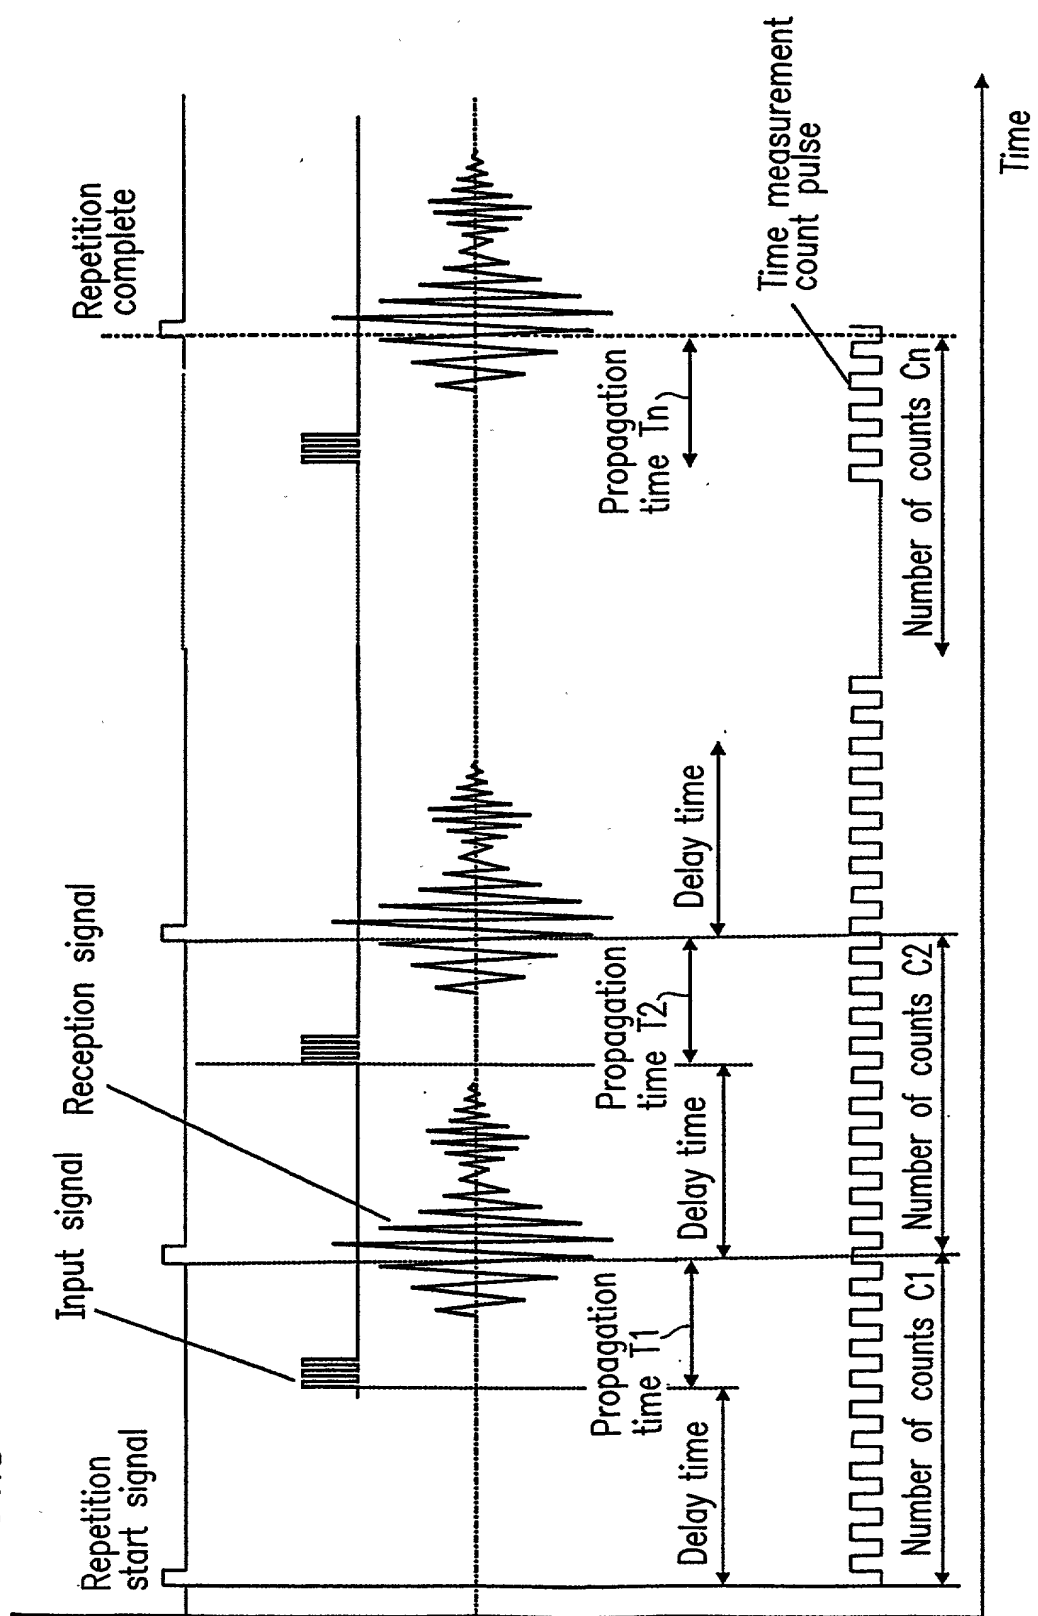


3/65

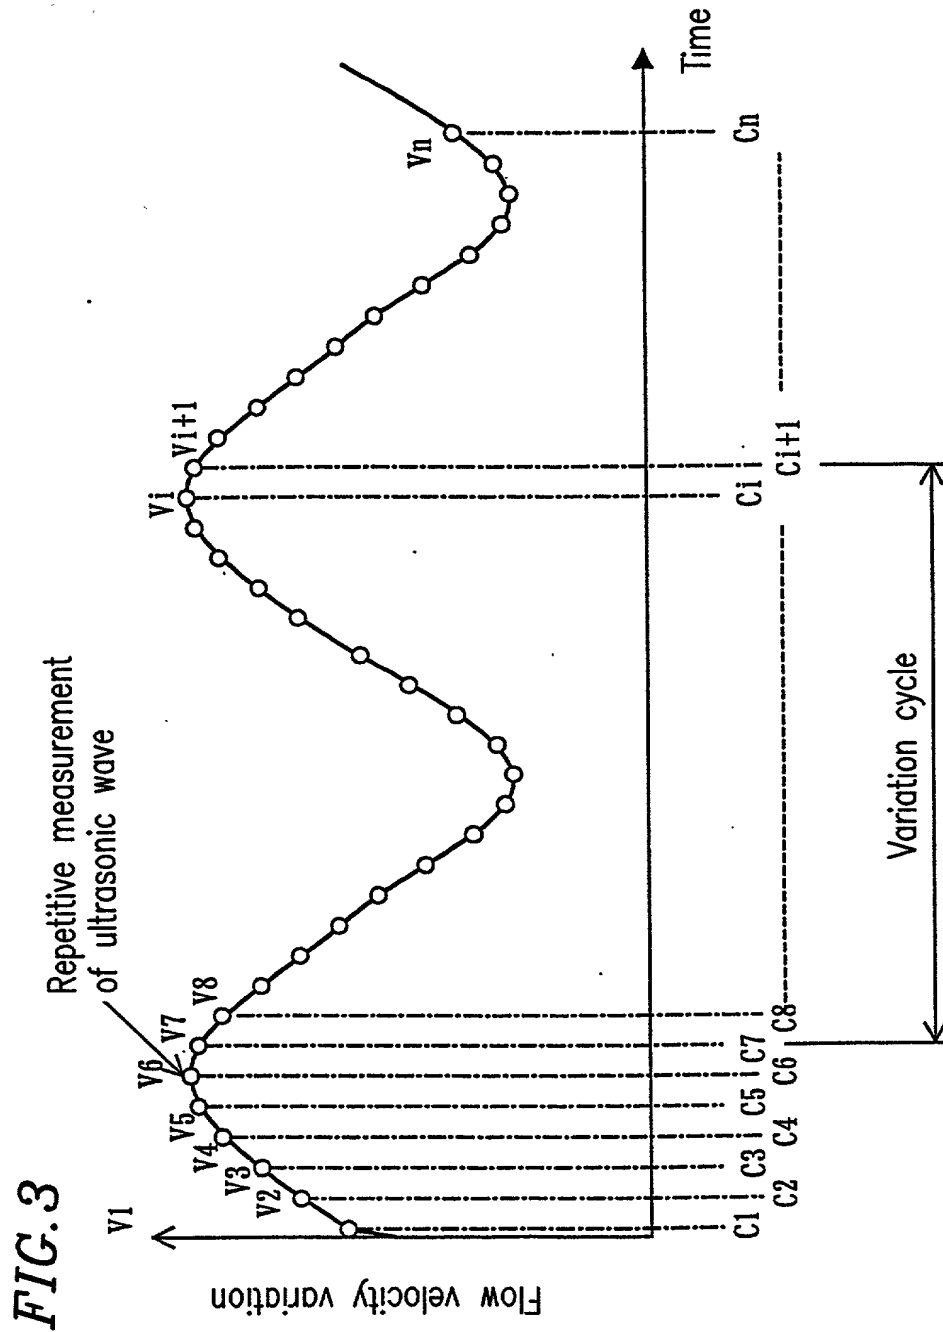


4/65


FIG. 4

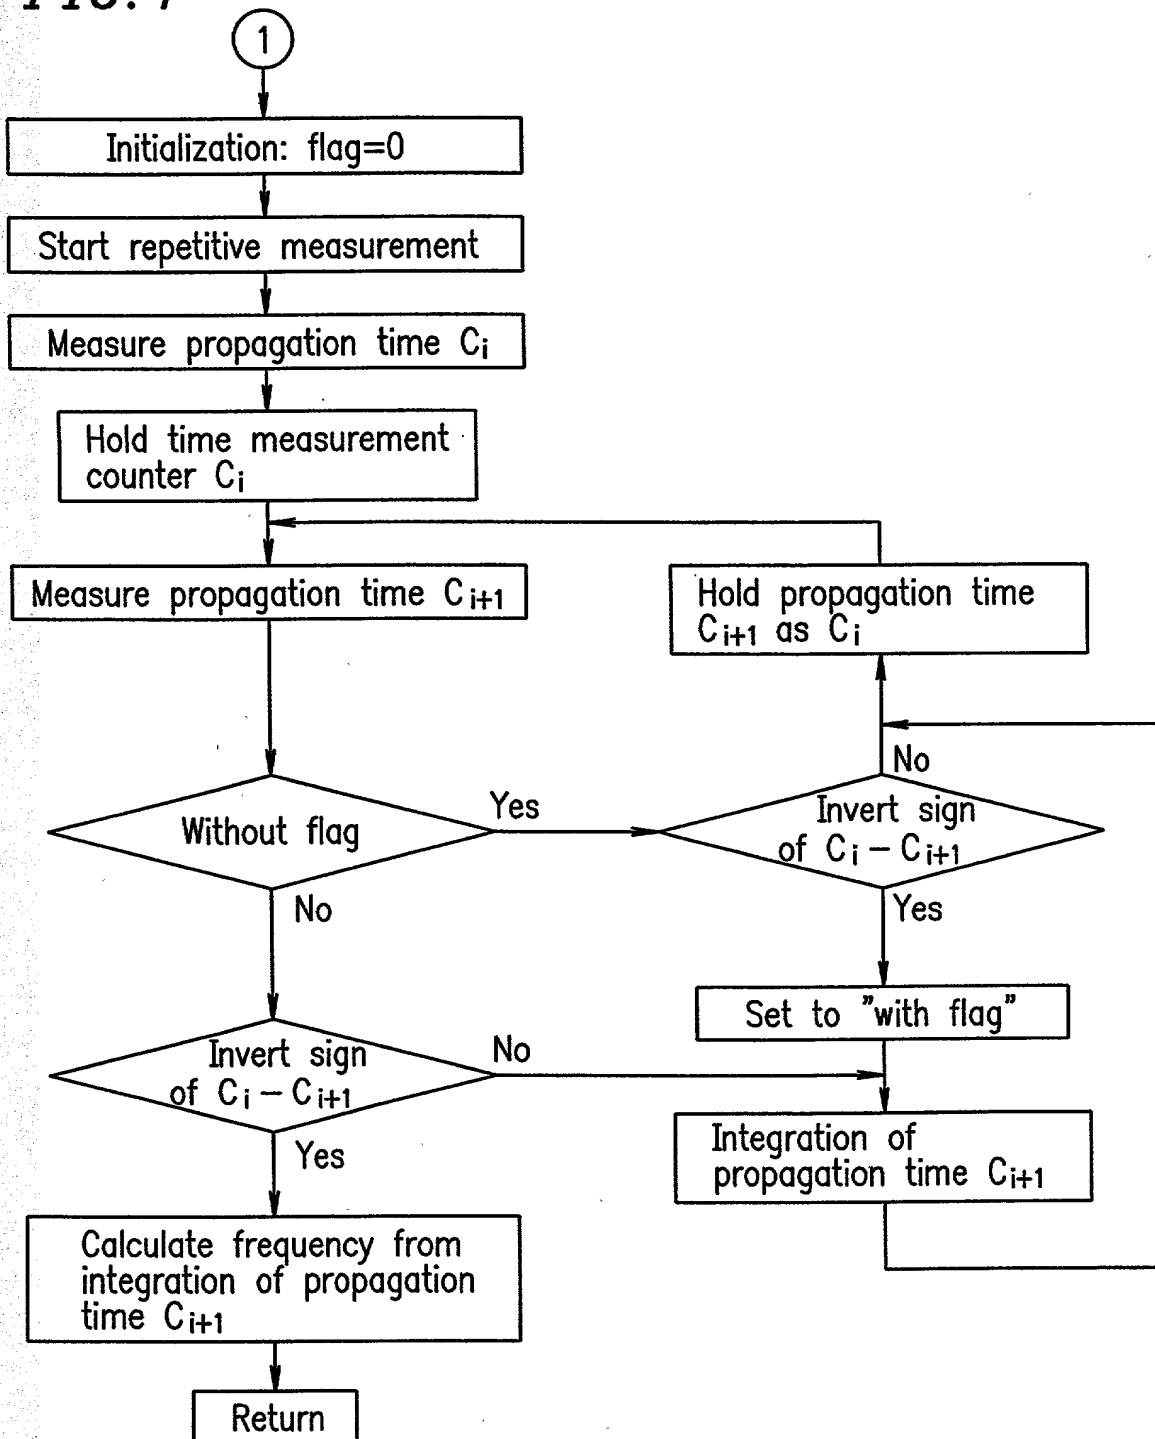

5/65

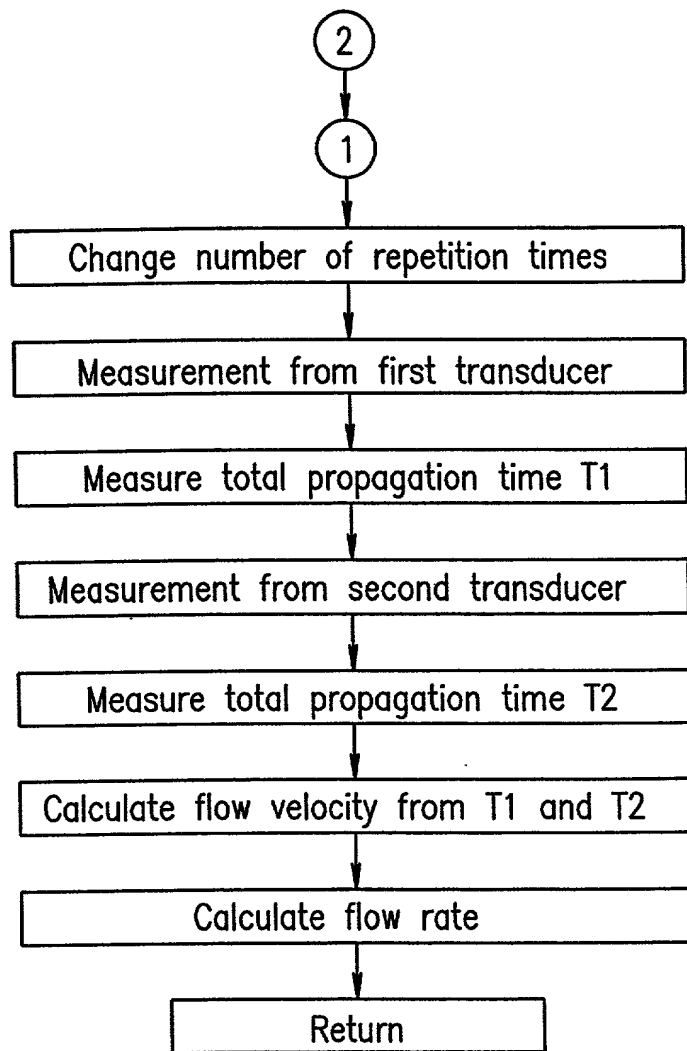
FIG. 5

6/65

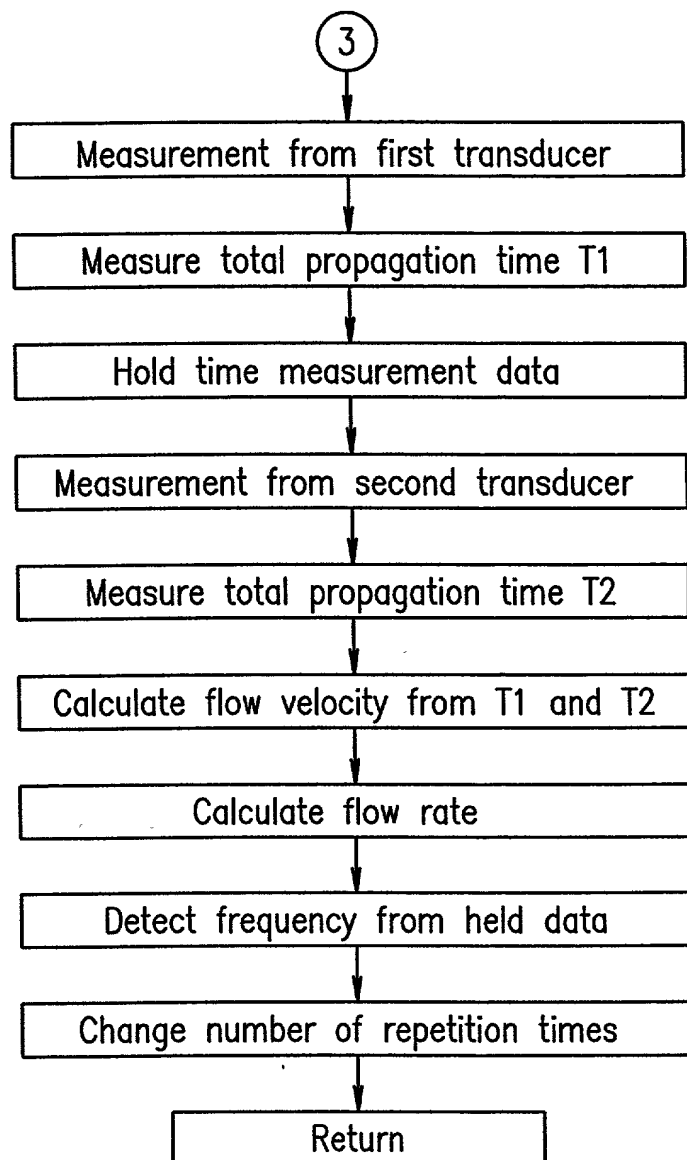FIG. 6

7/65


FIG. 7

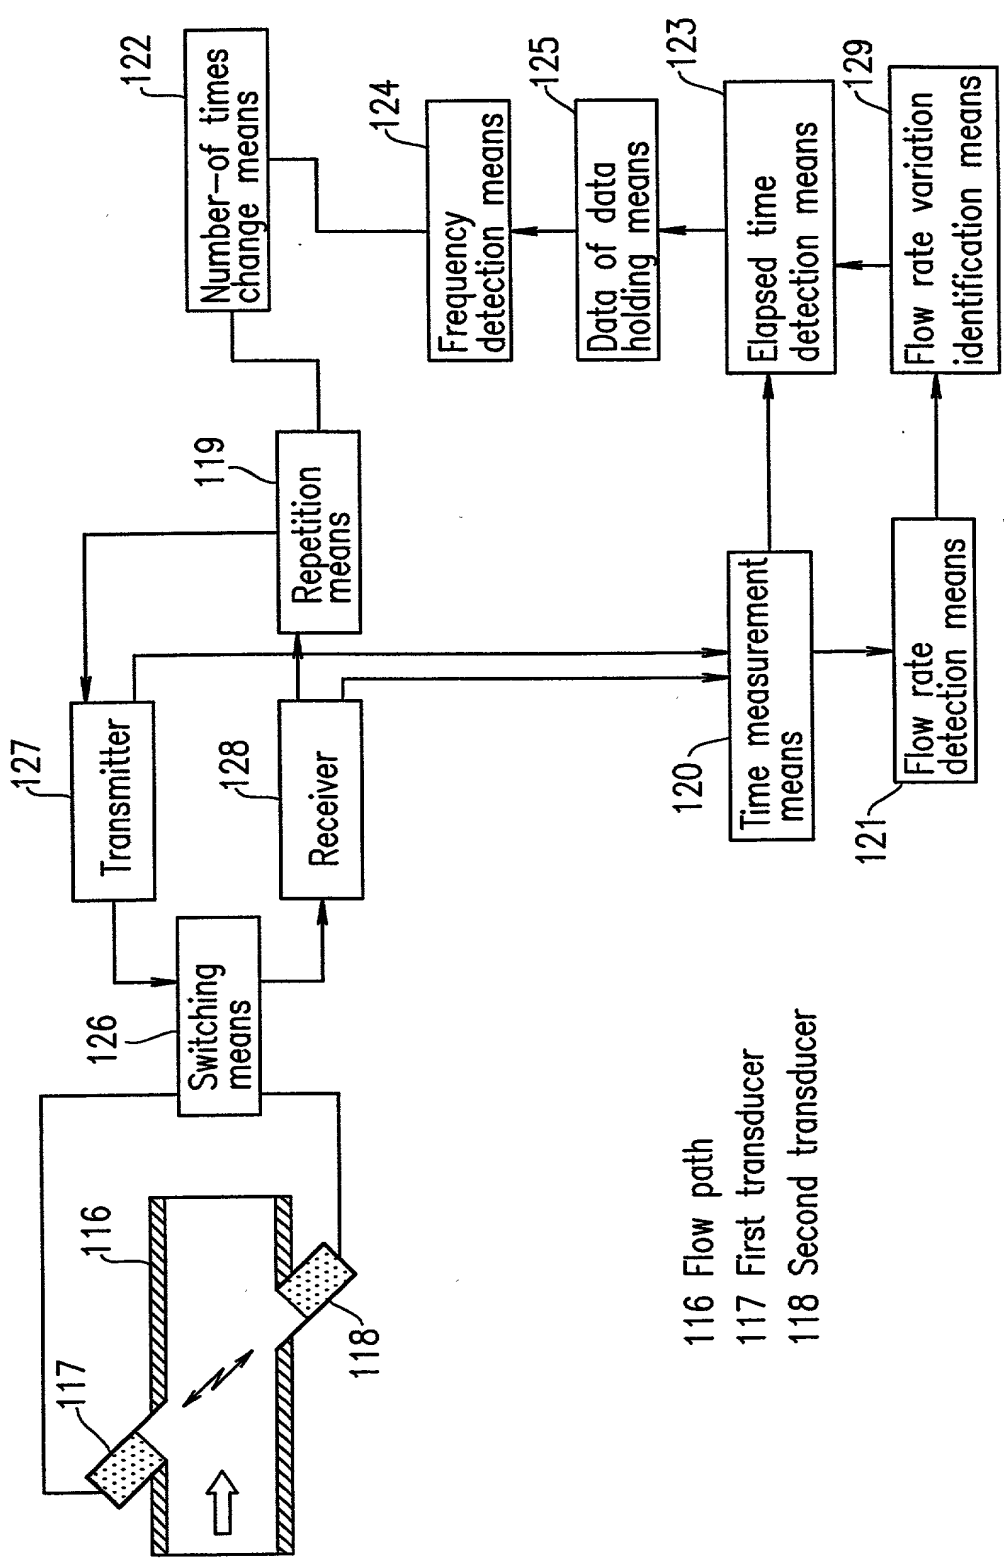

- 116 Flow path
- 117 First transducer
- 118 Second transducer

8/65

FIG. 8

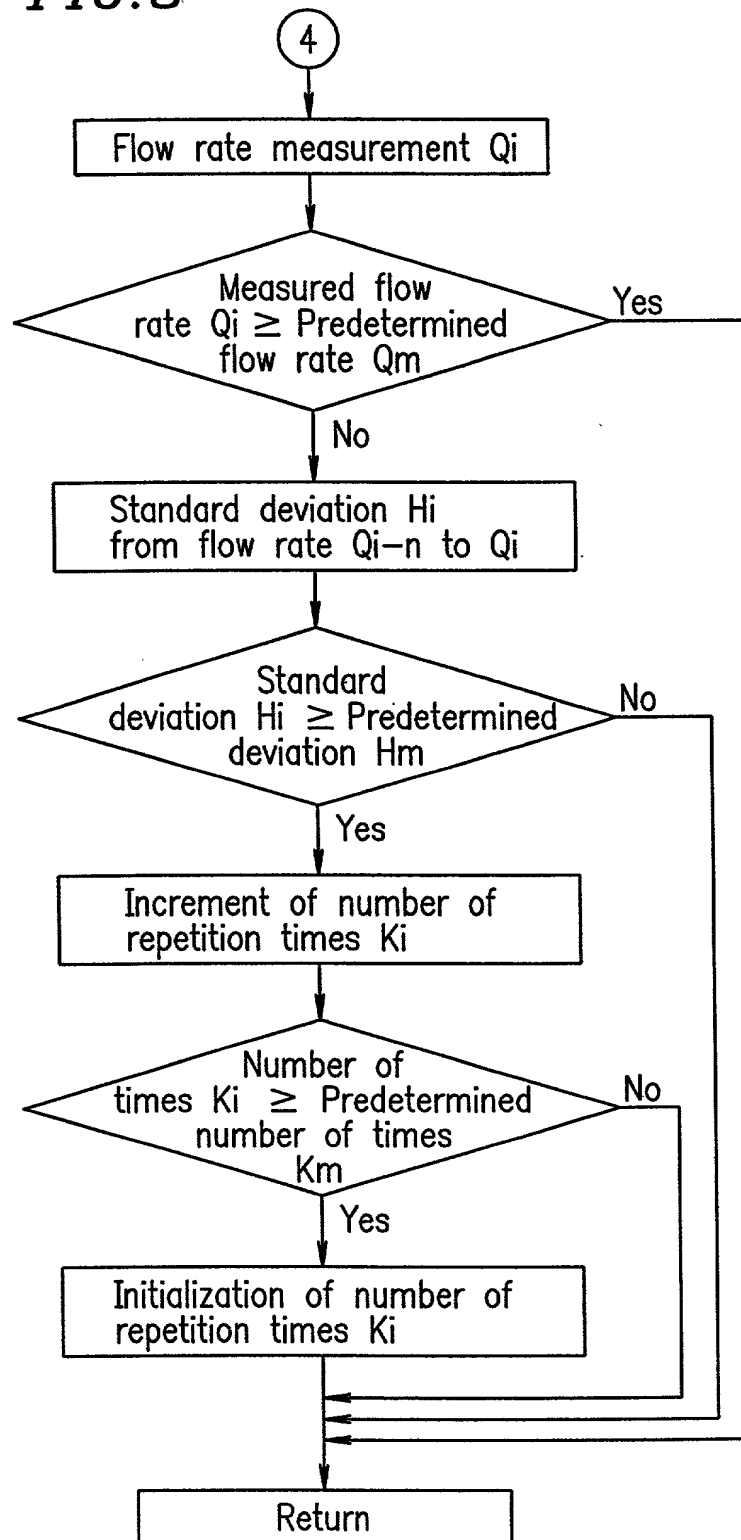

9/65

FIG. 9



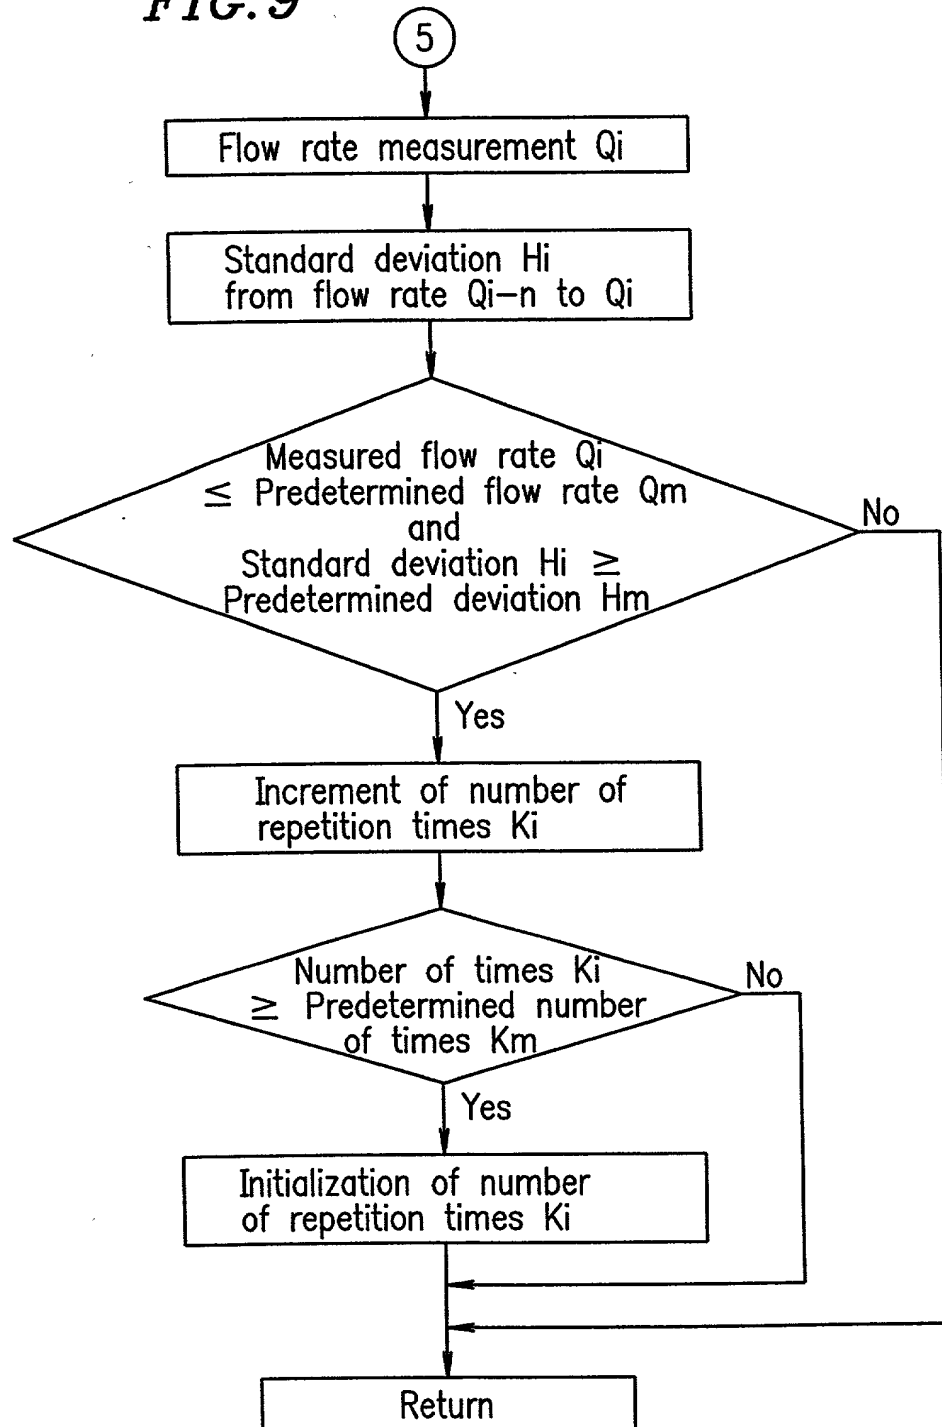


FIG. 10

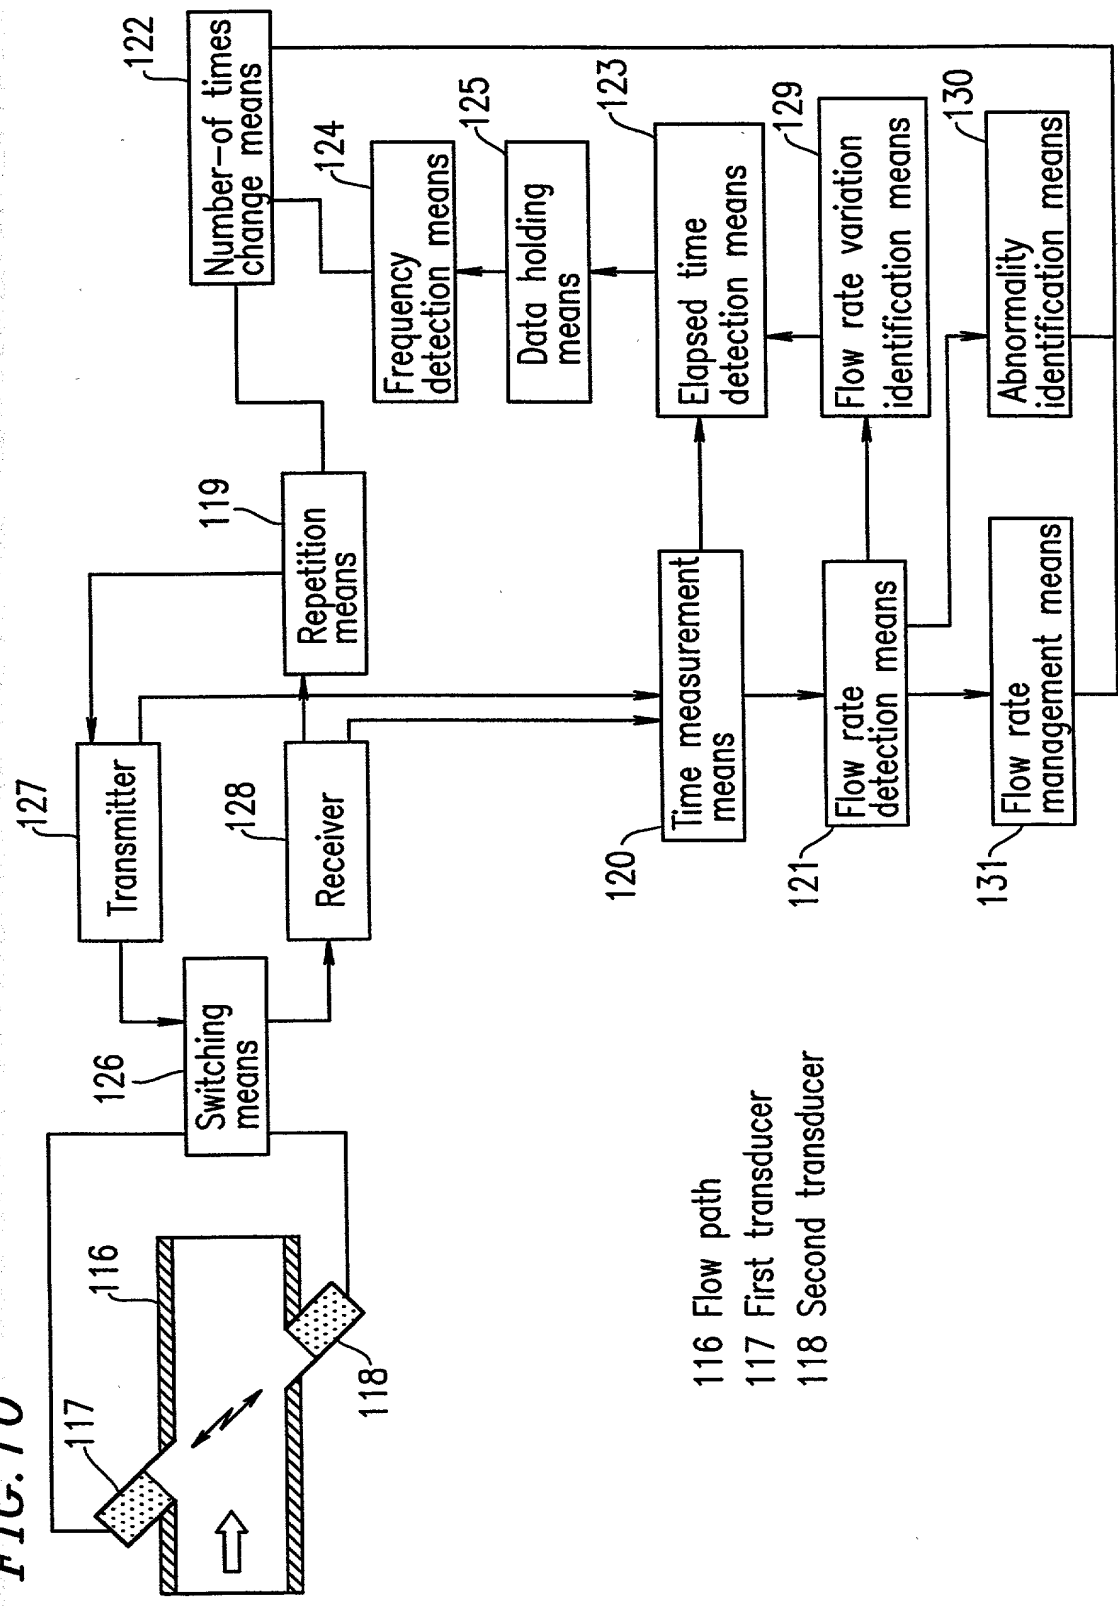


11/65

FIG. 11

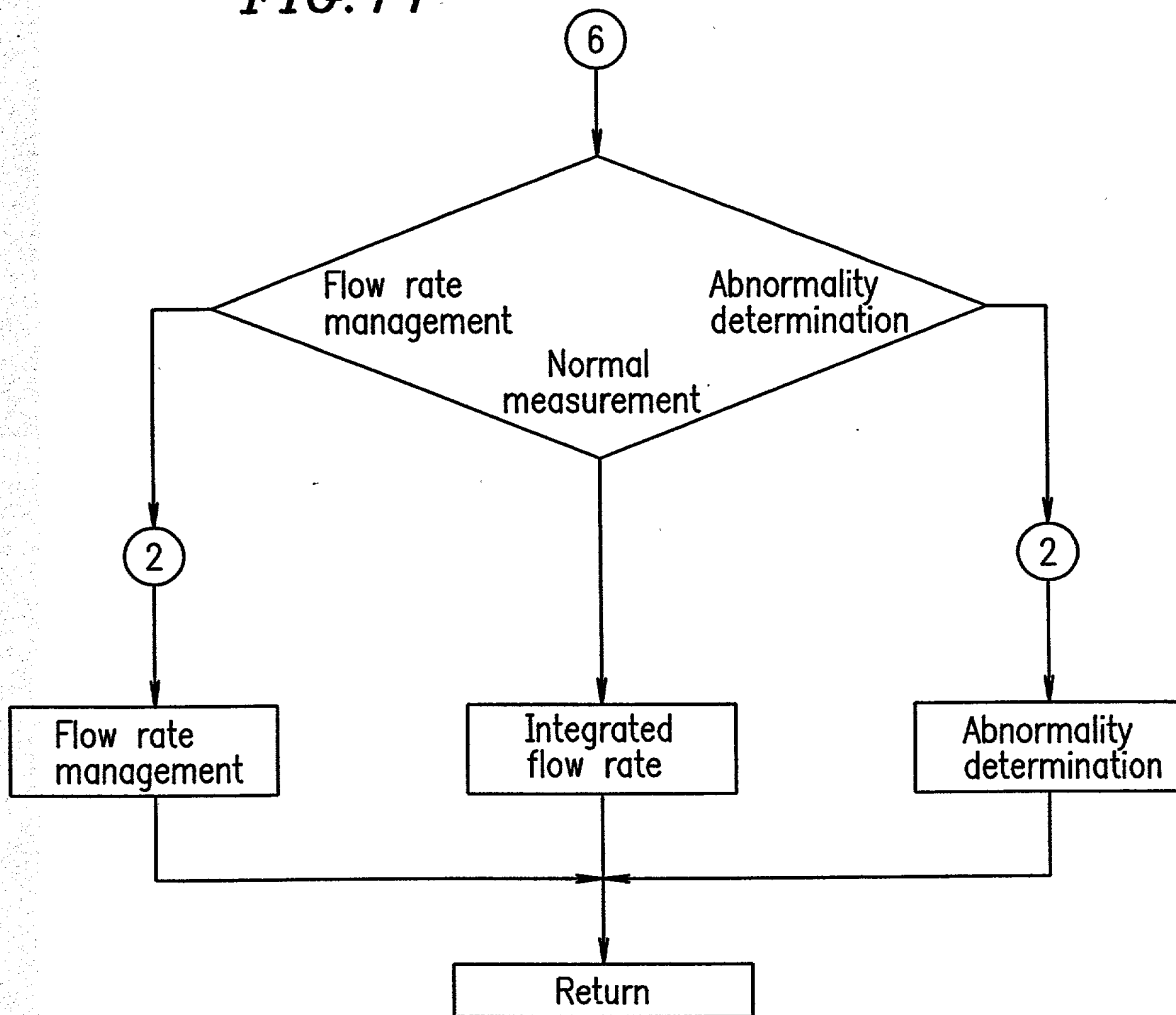

12/65

FIG. 12

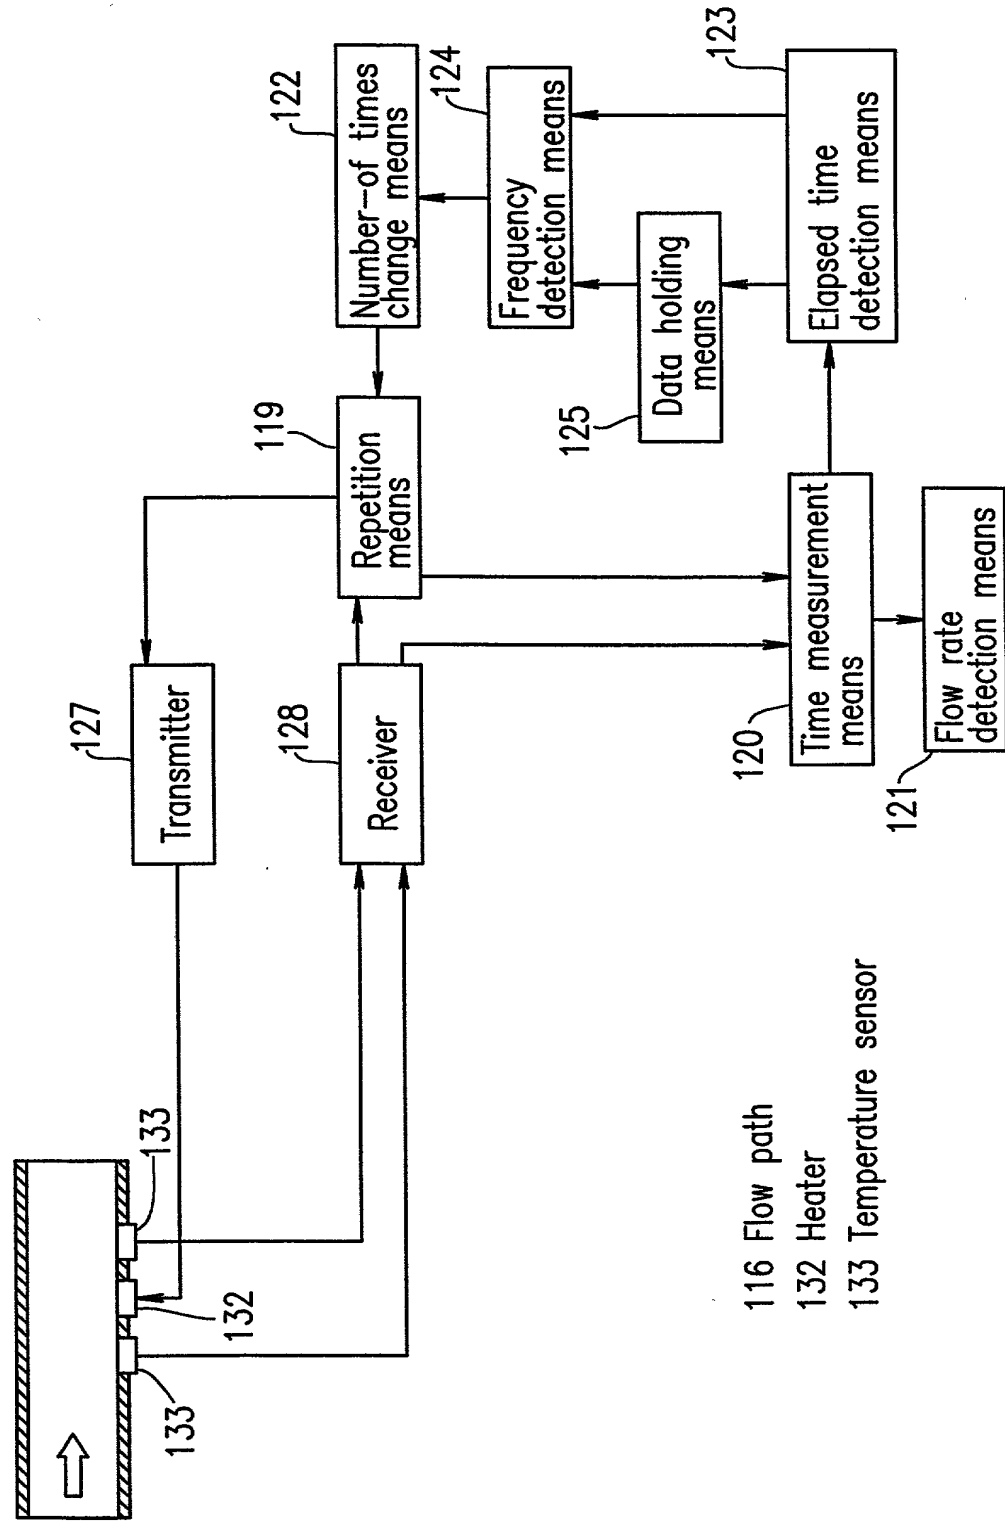

- 116 Flow path
- 132 Heater
- 133 Temperature sensor

13/65



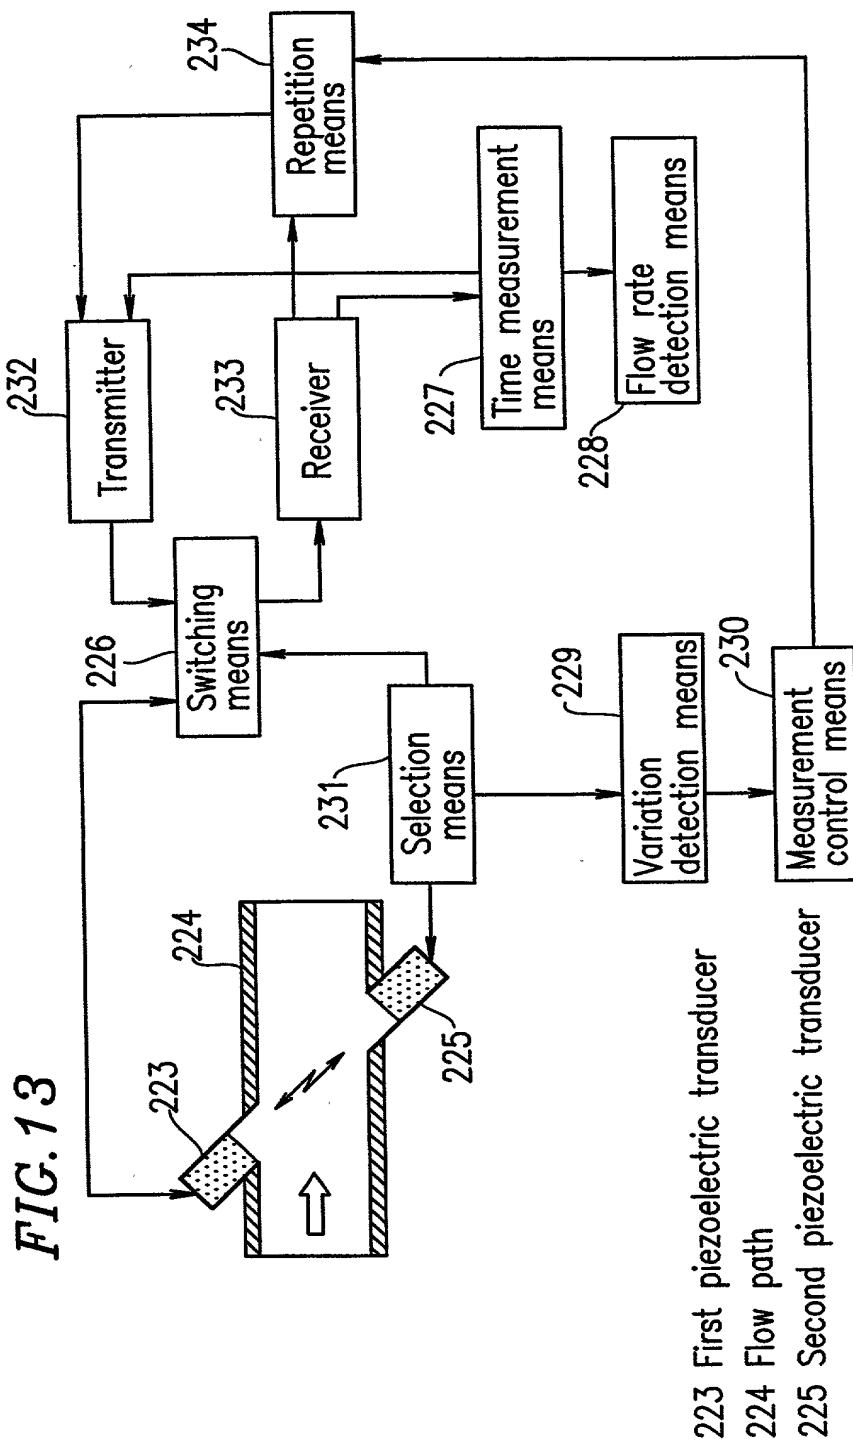


FIG. 14

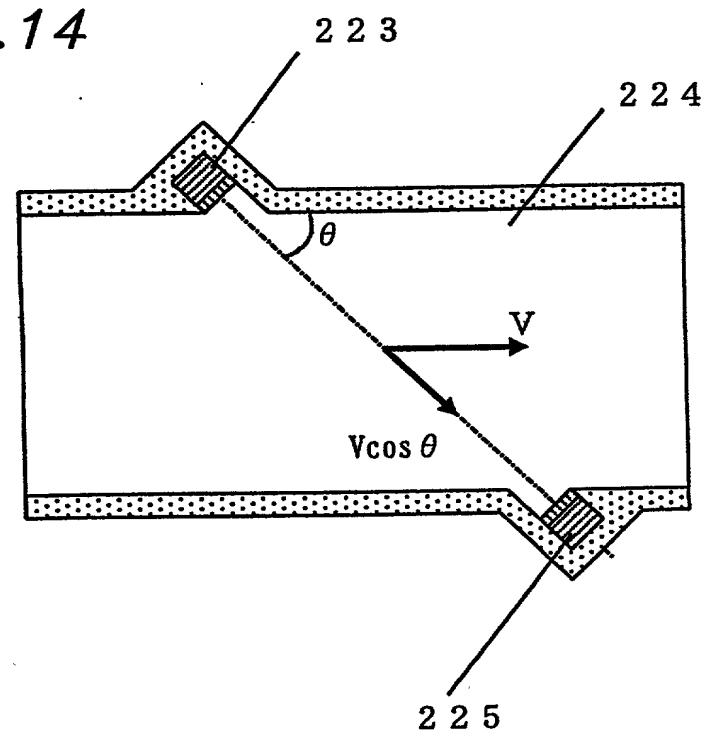

15/65

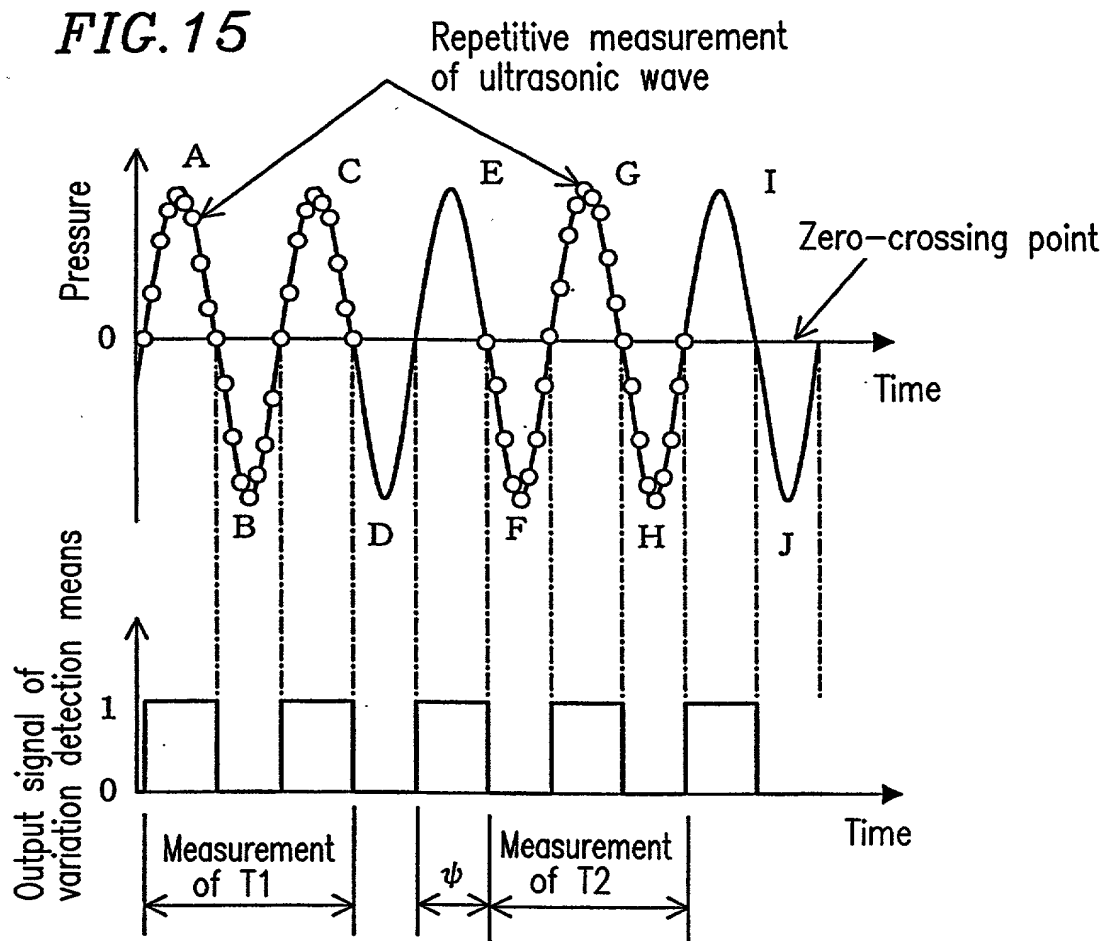

16/65

FIG. 16


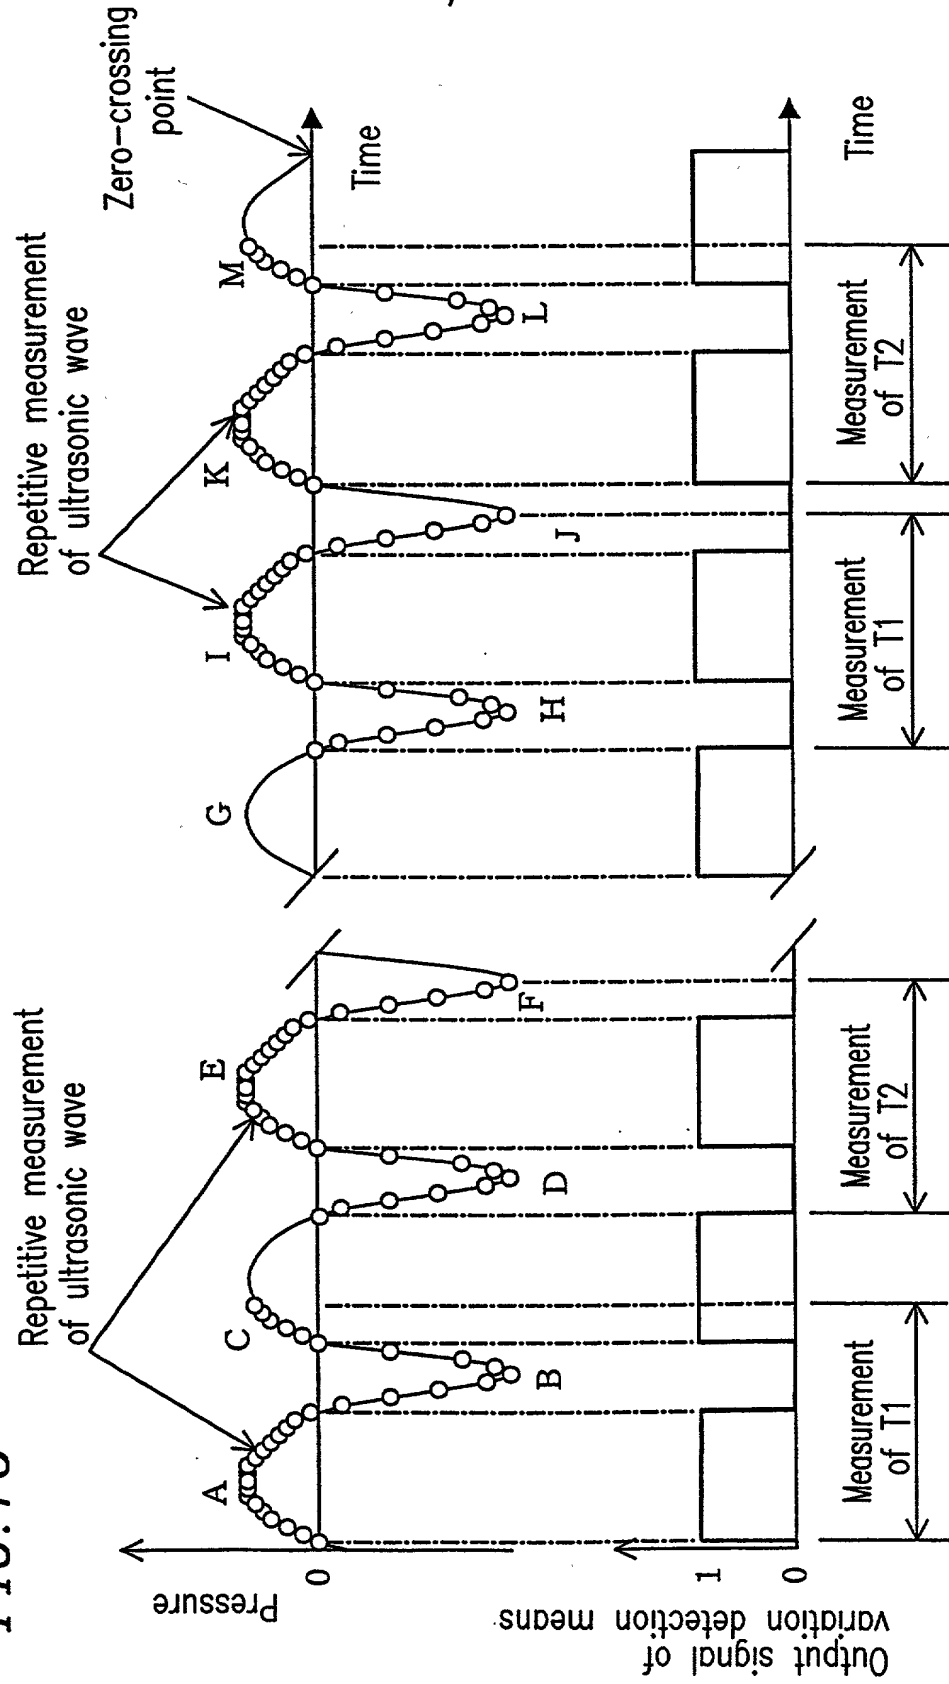



FIG. 17 7

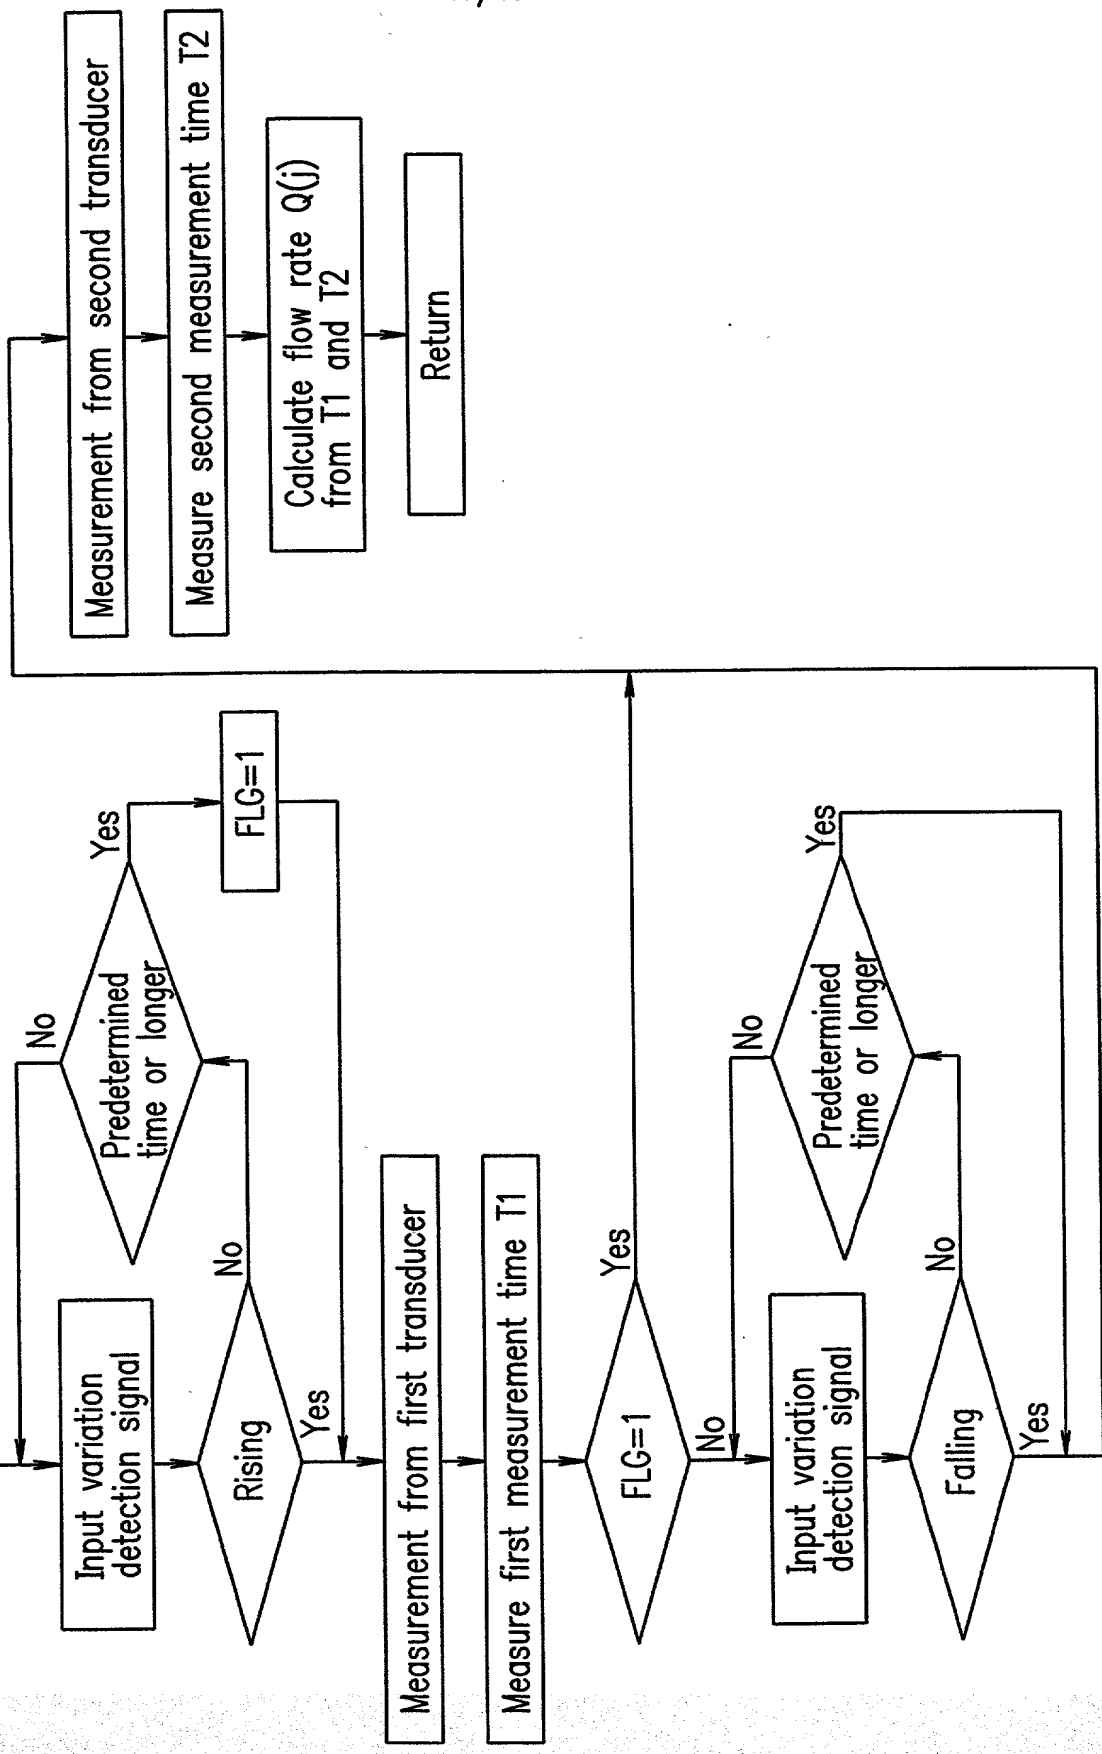


18/65

FIG. 18

8

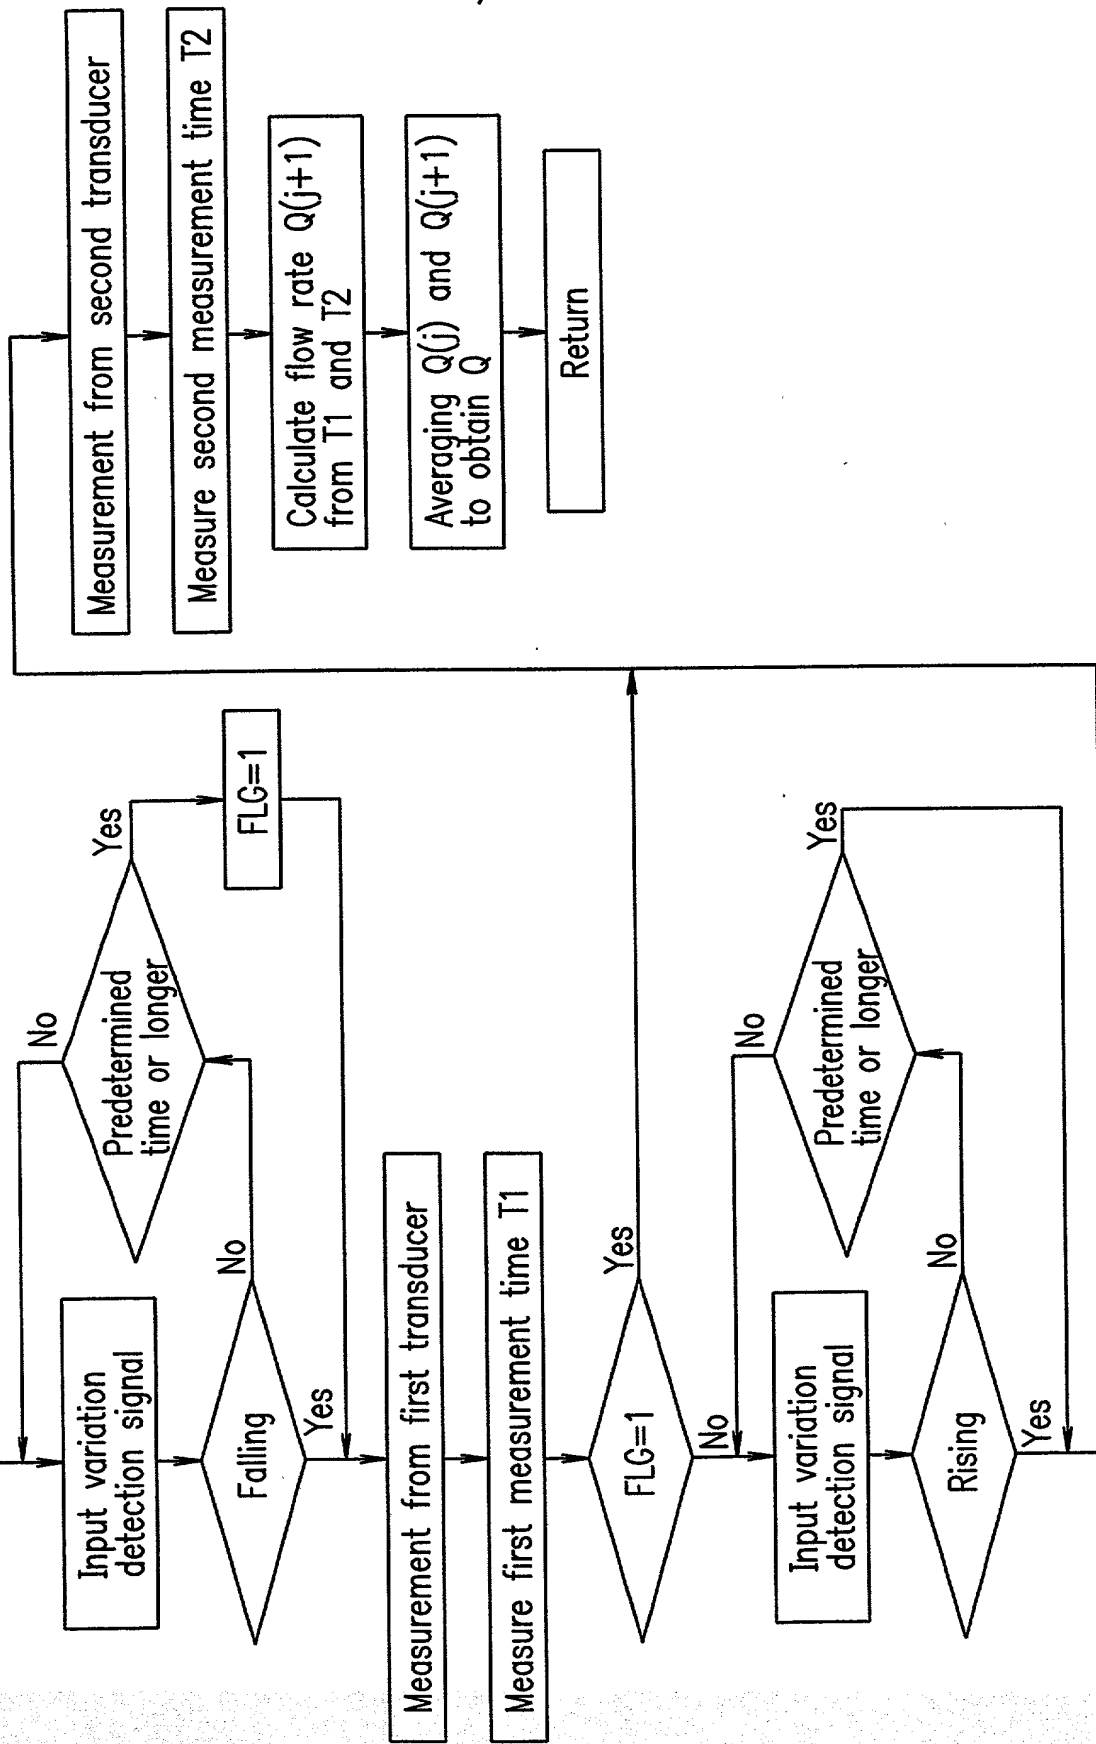


19/65

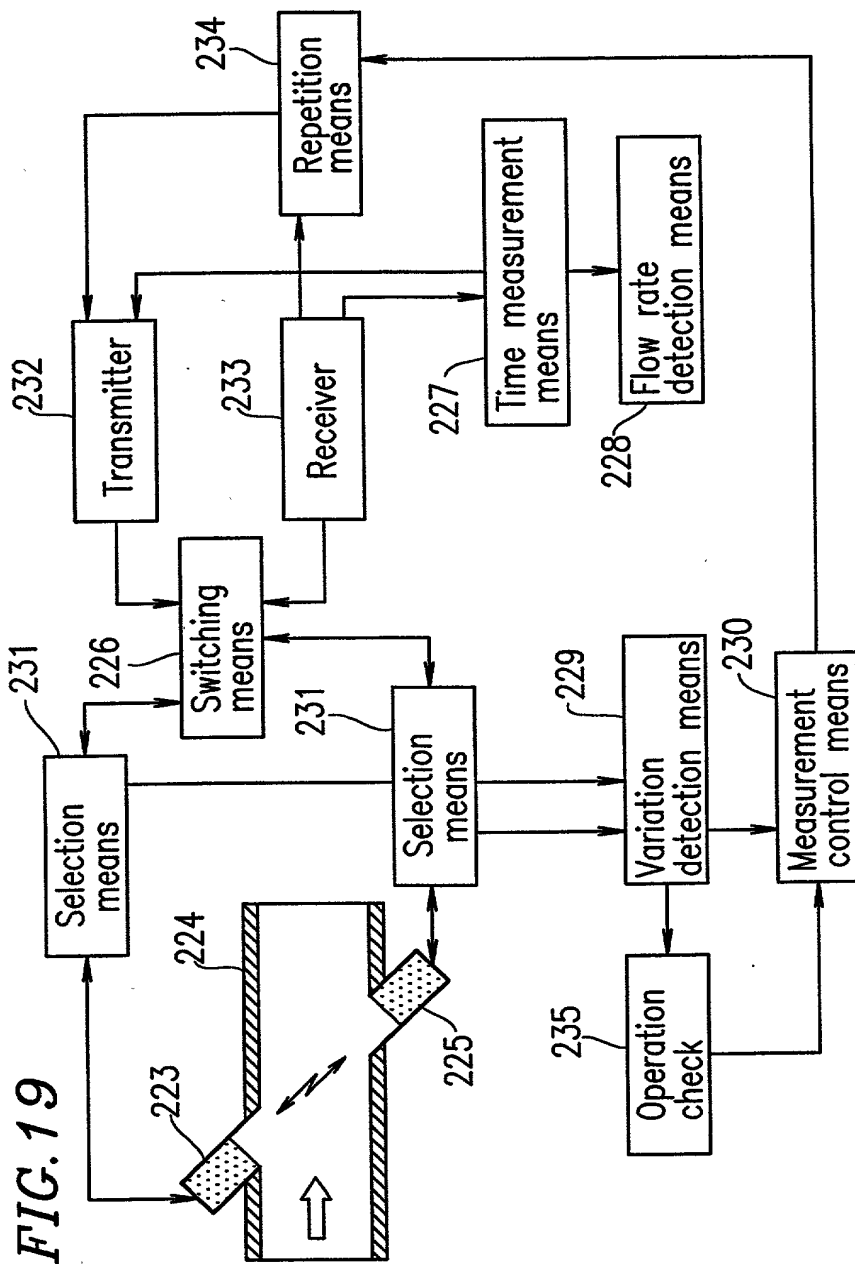


20/65


FIG. 20

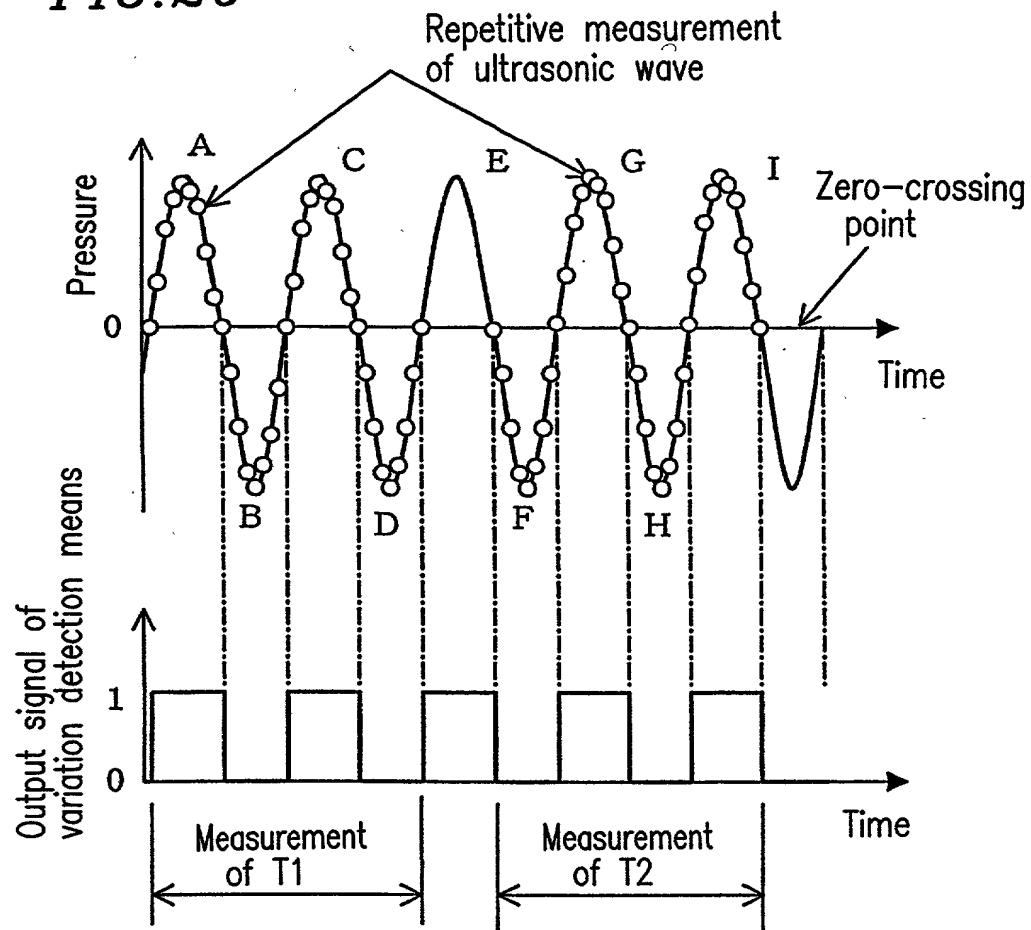

21/65

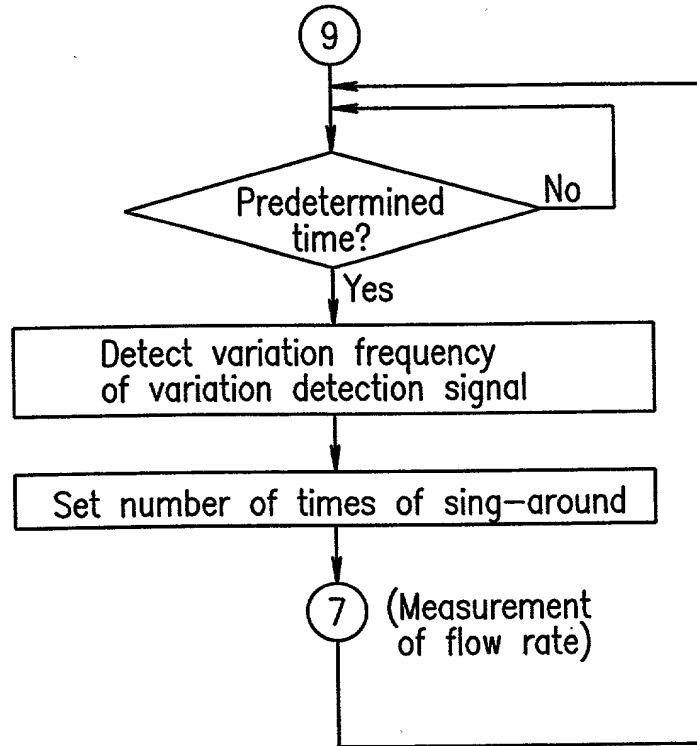
FIG. 21


22/65

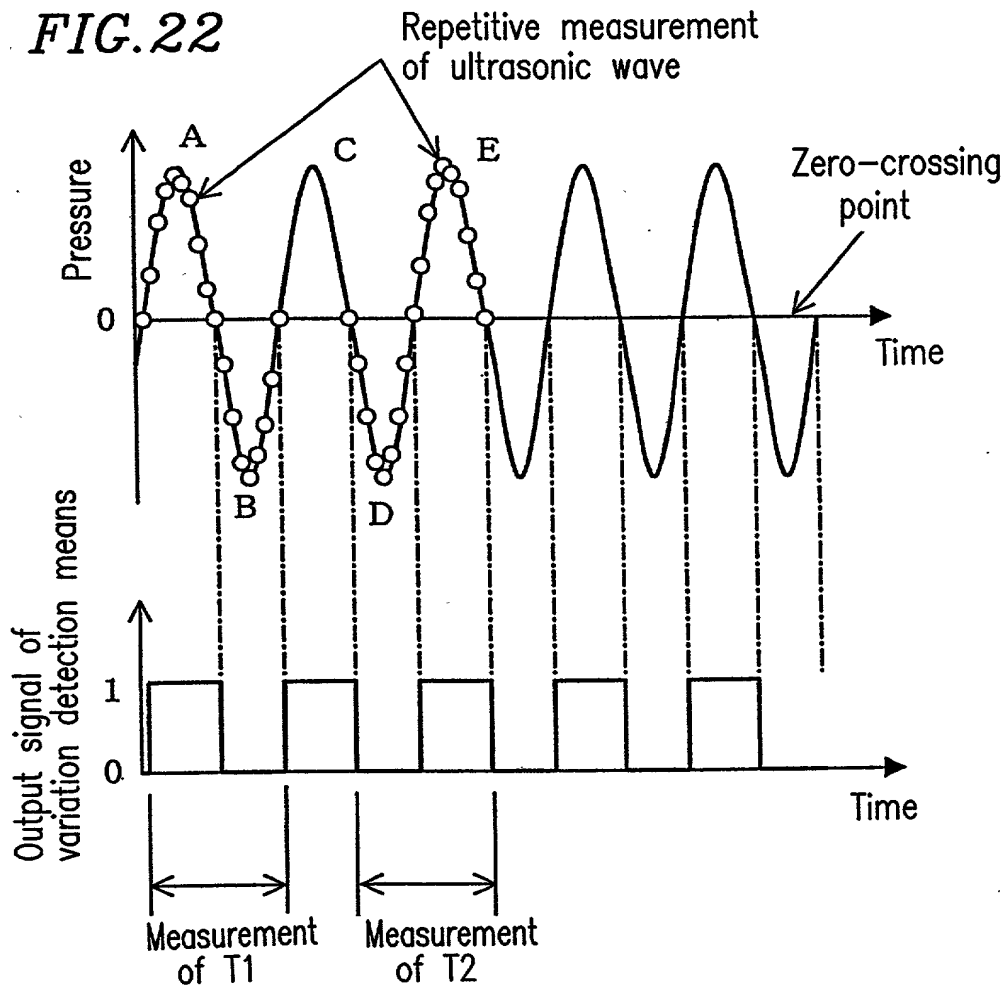FIG. 22


23/65

FIG. 23

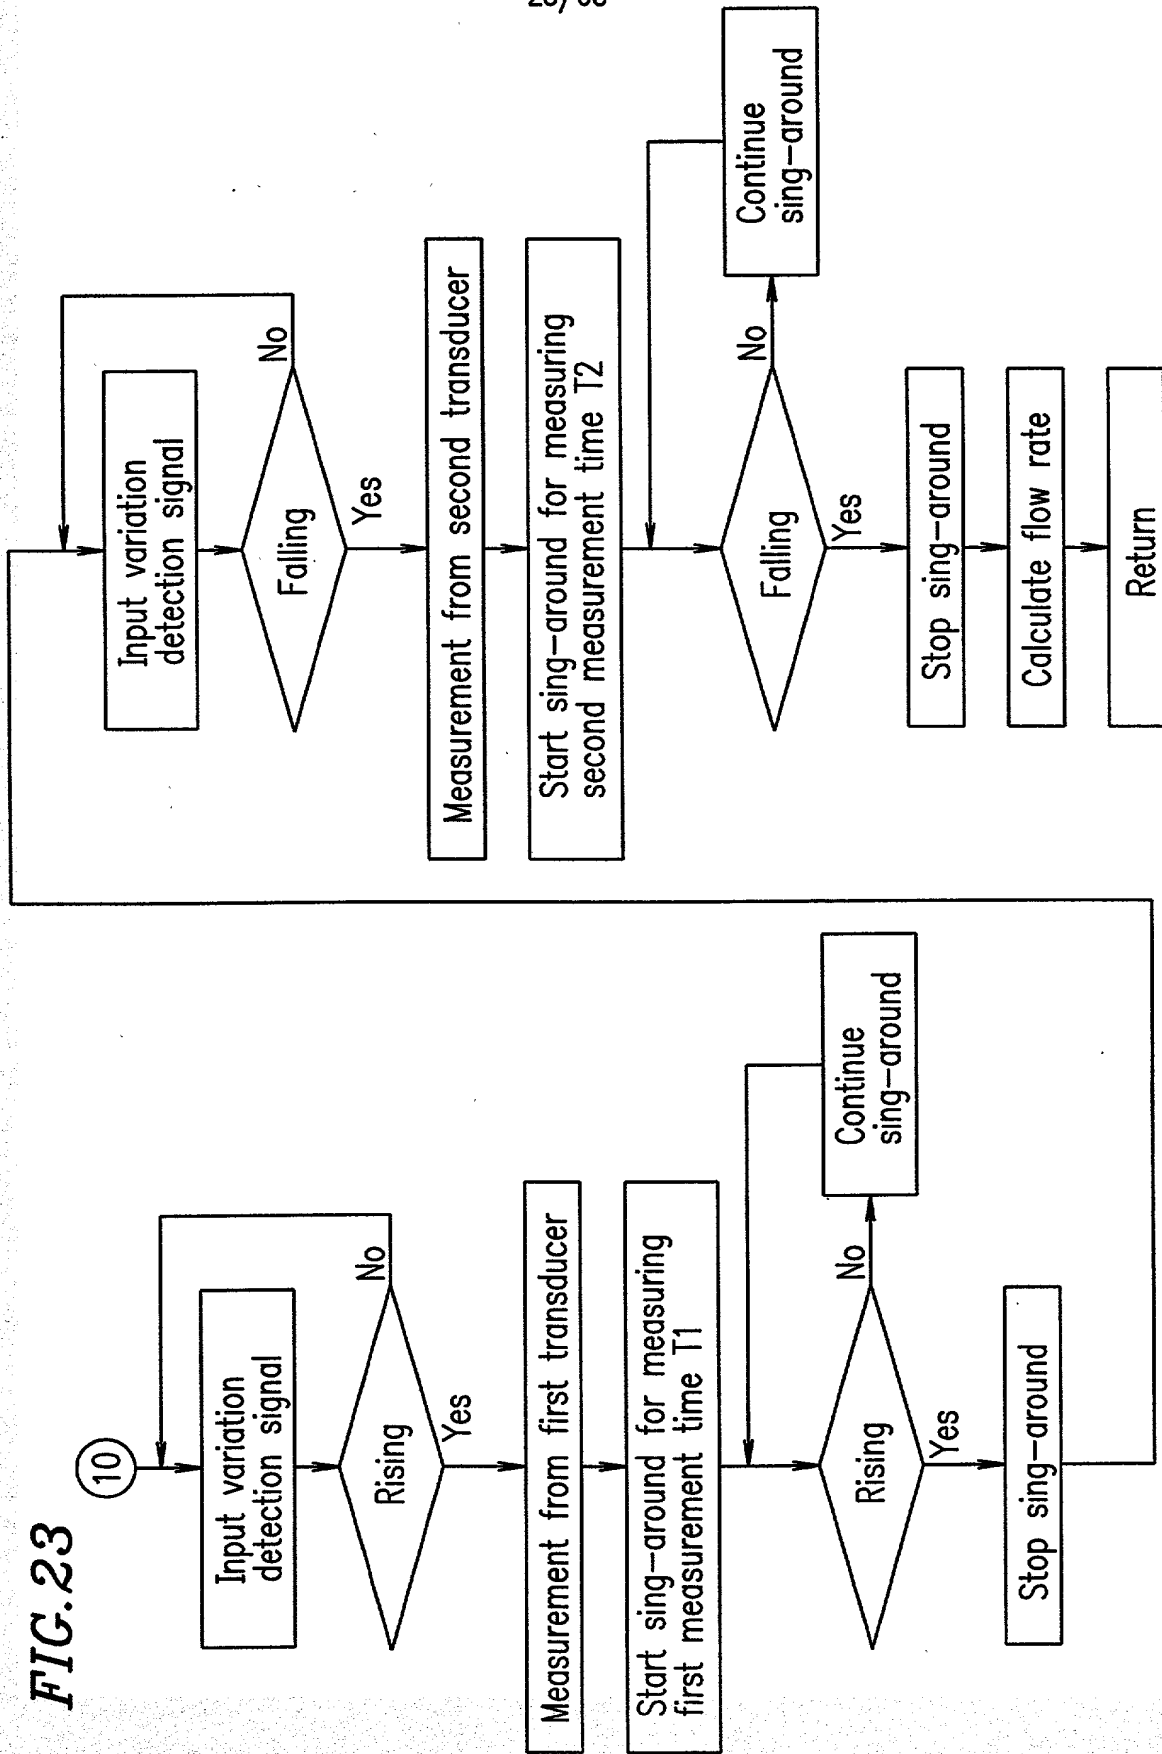


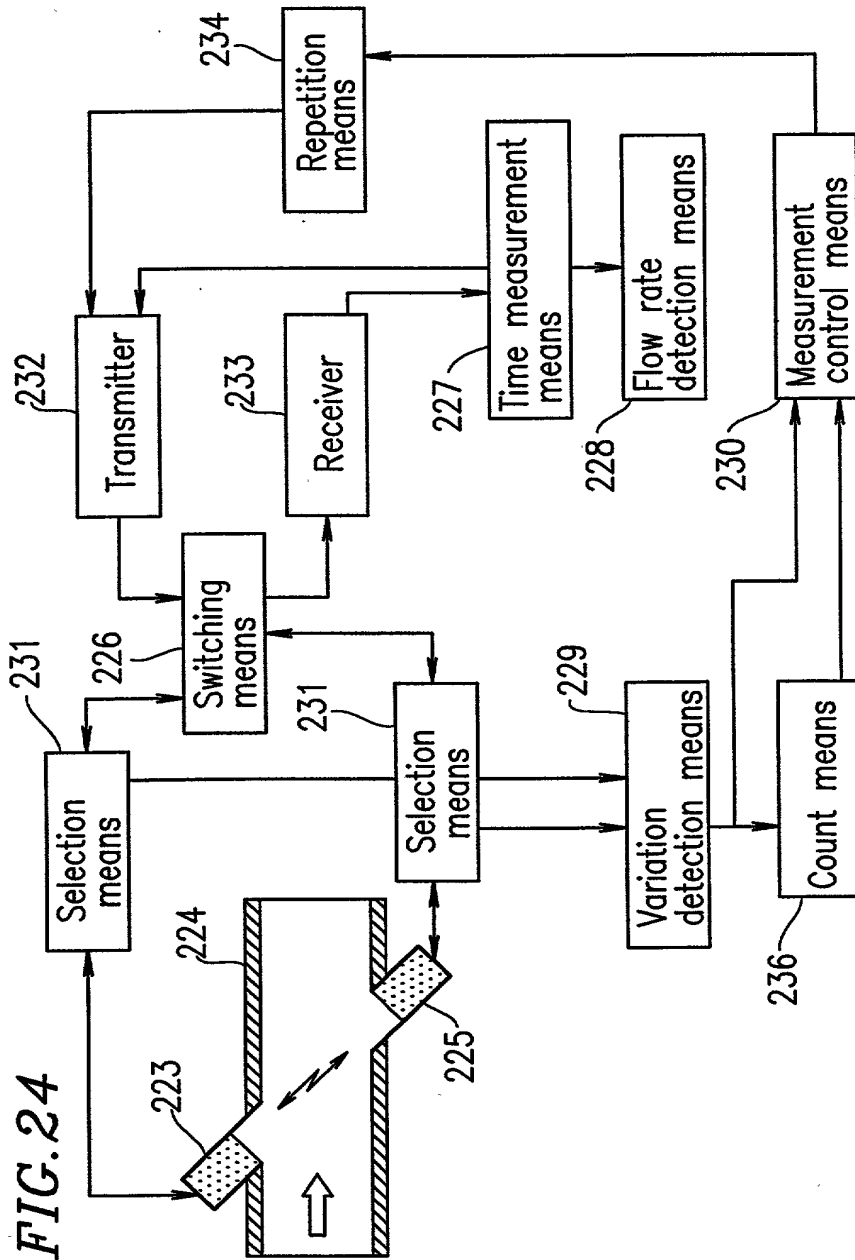

25/65

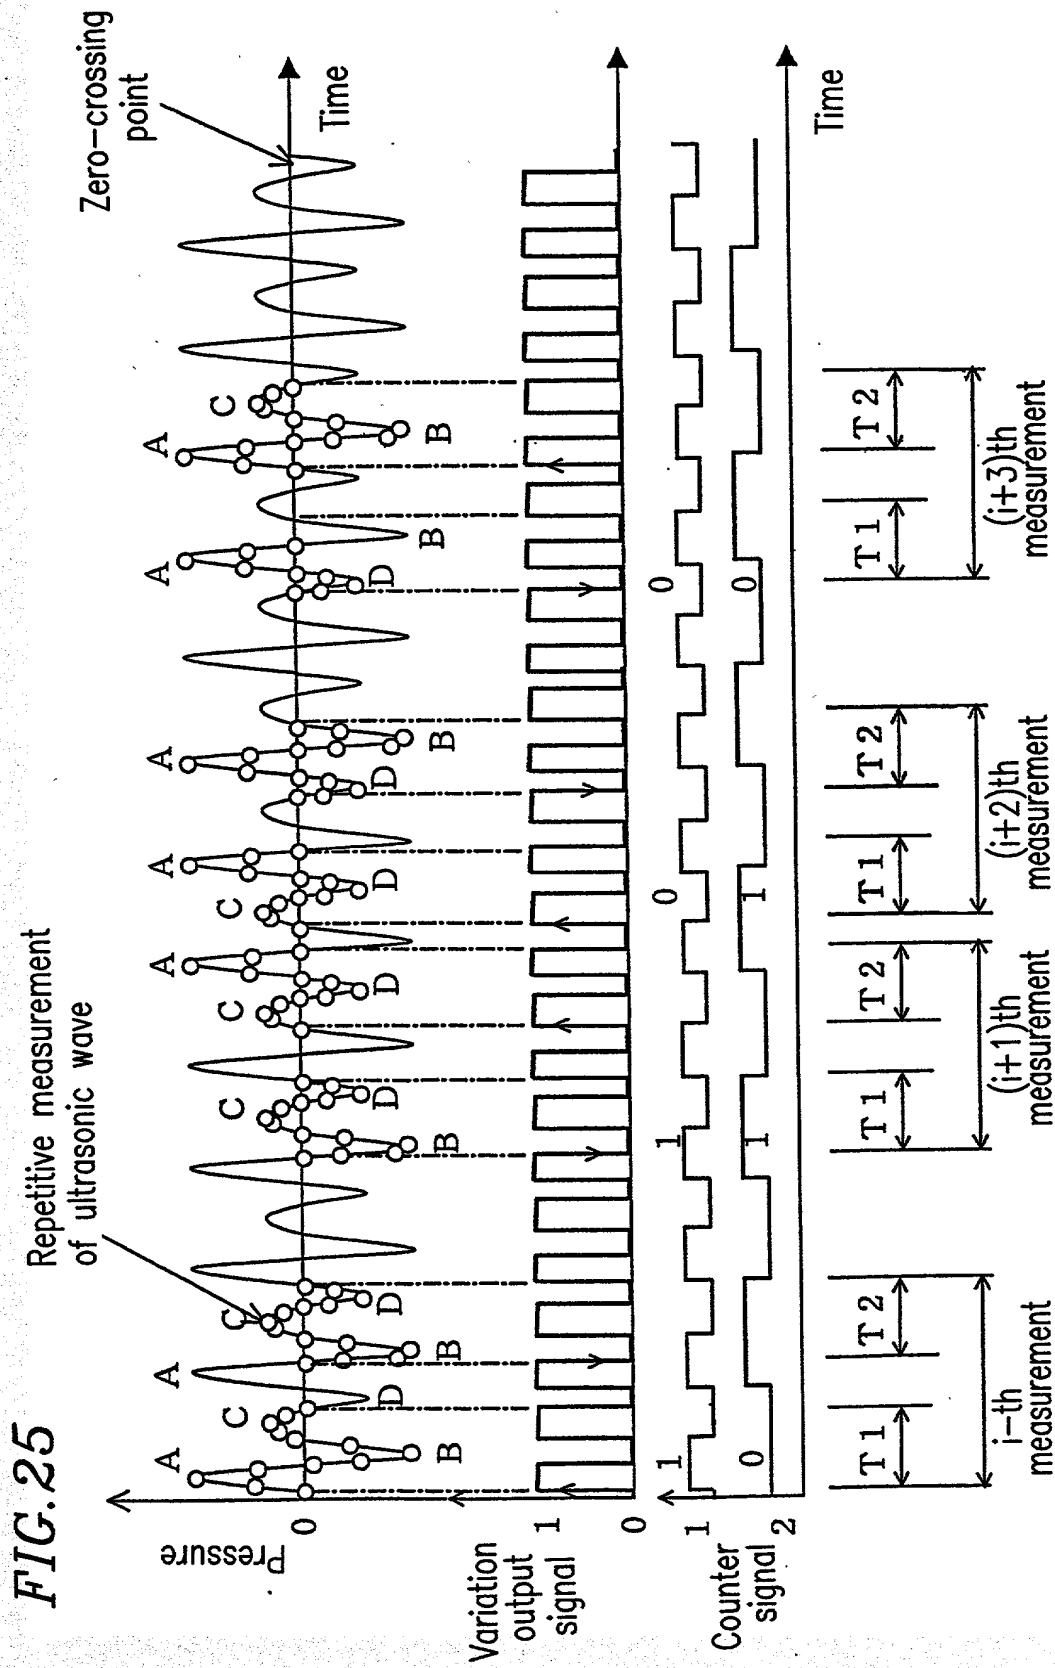


26/65

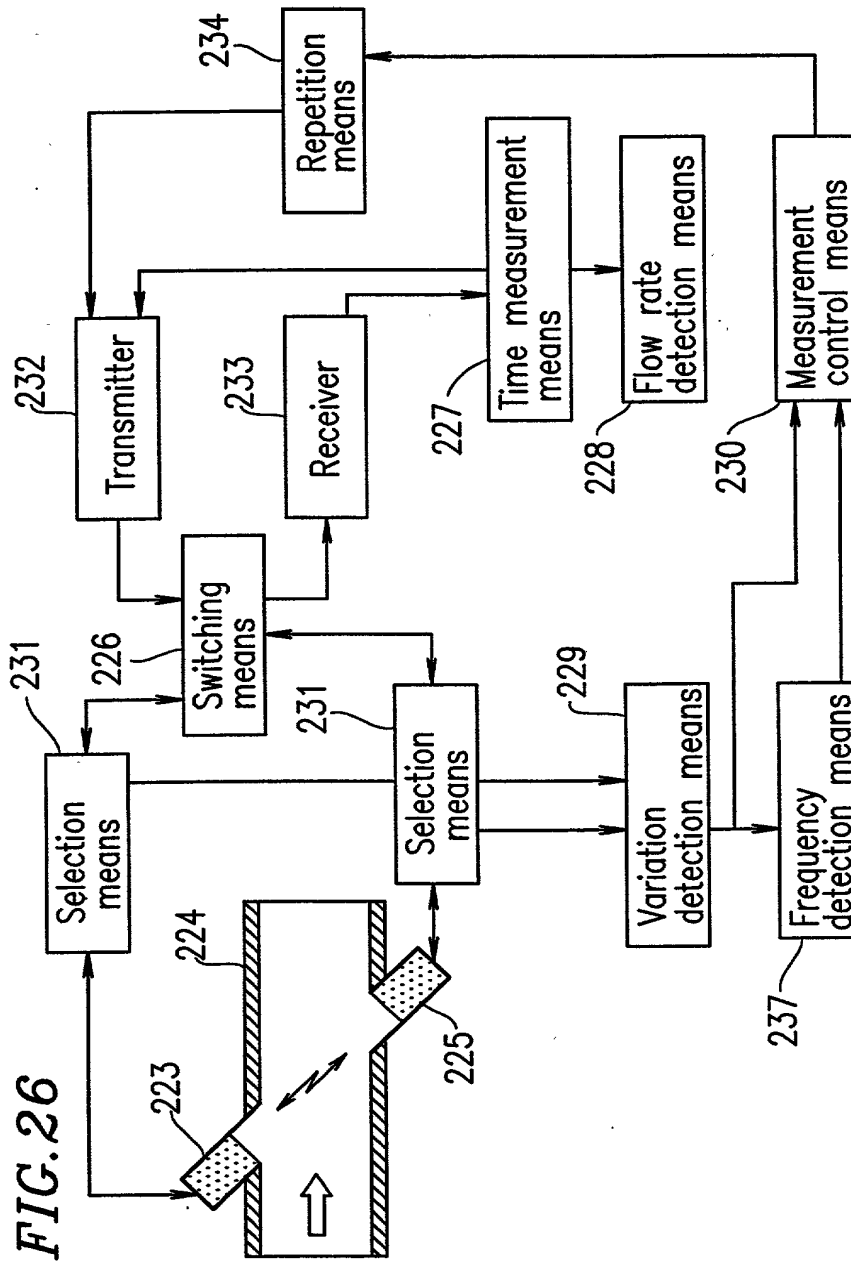


27/65


FIG. 27

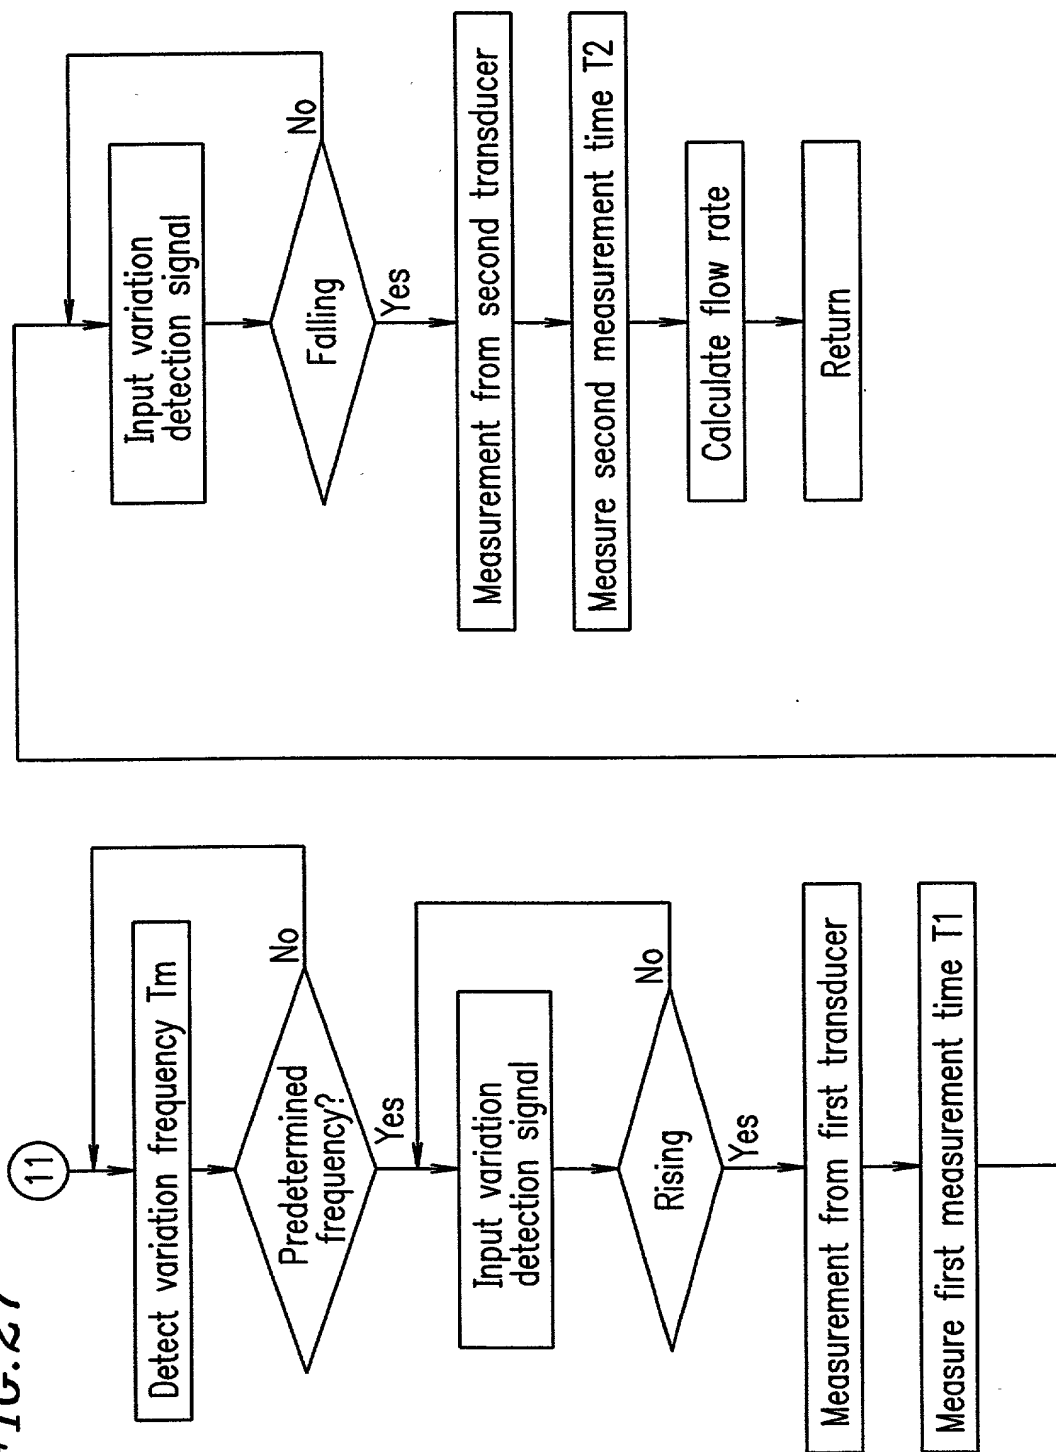

28/65

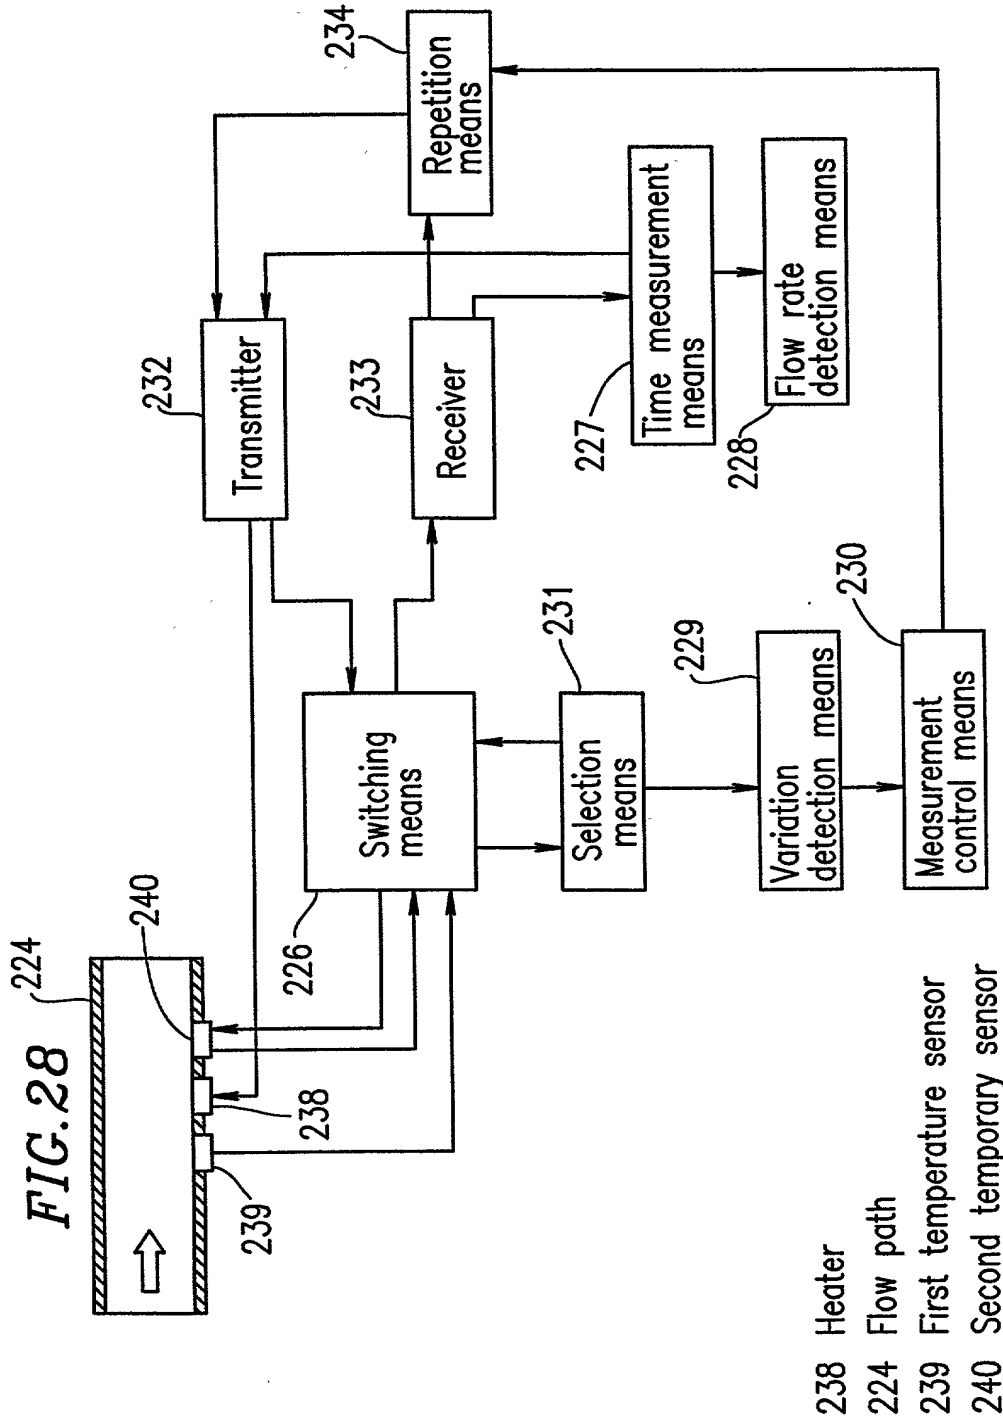

29/65

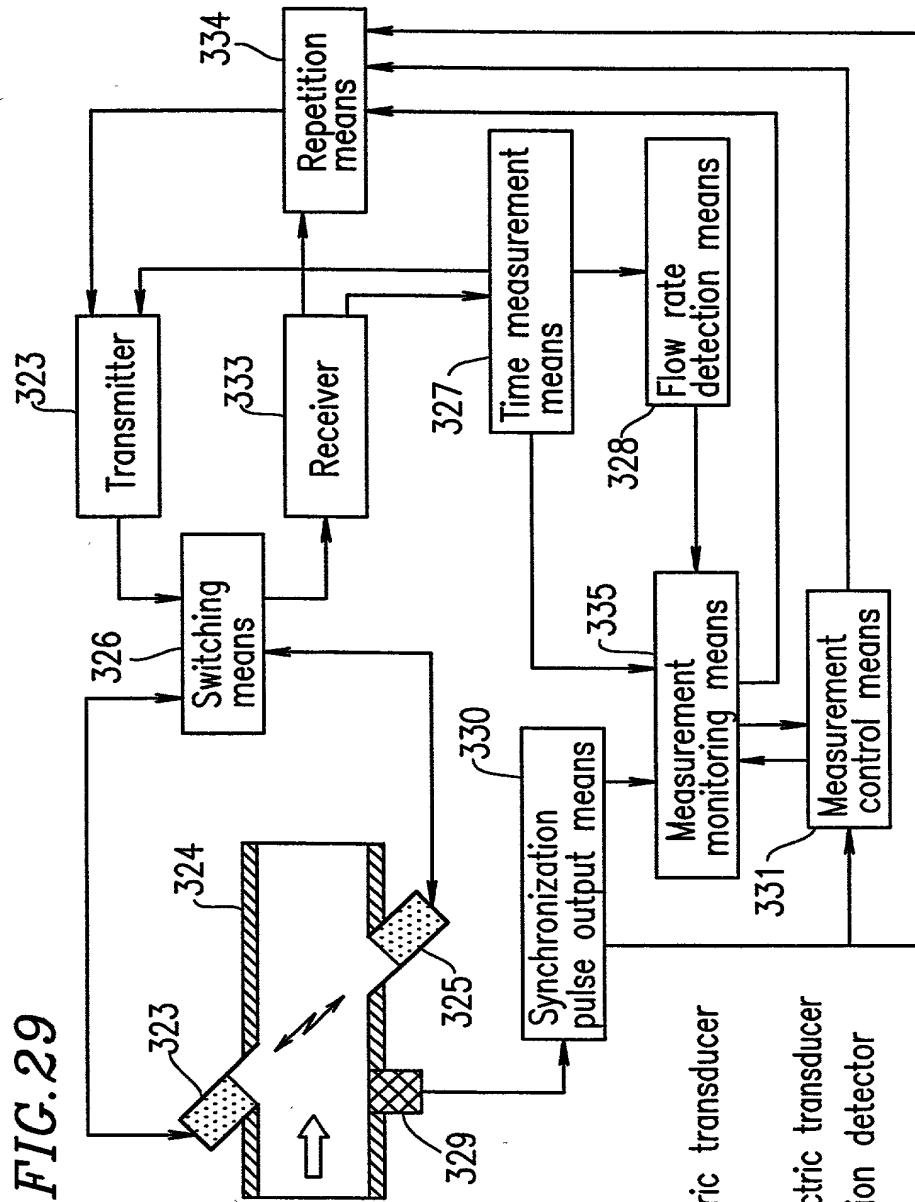


323 First piezoelectric transducer

324 Flow path


325 Second piezoelectric transducer

329 Pressure variation detector


30/65

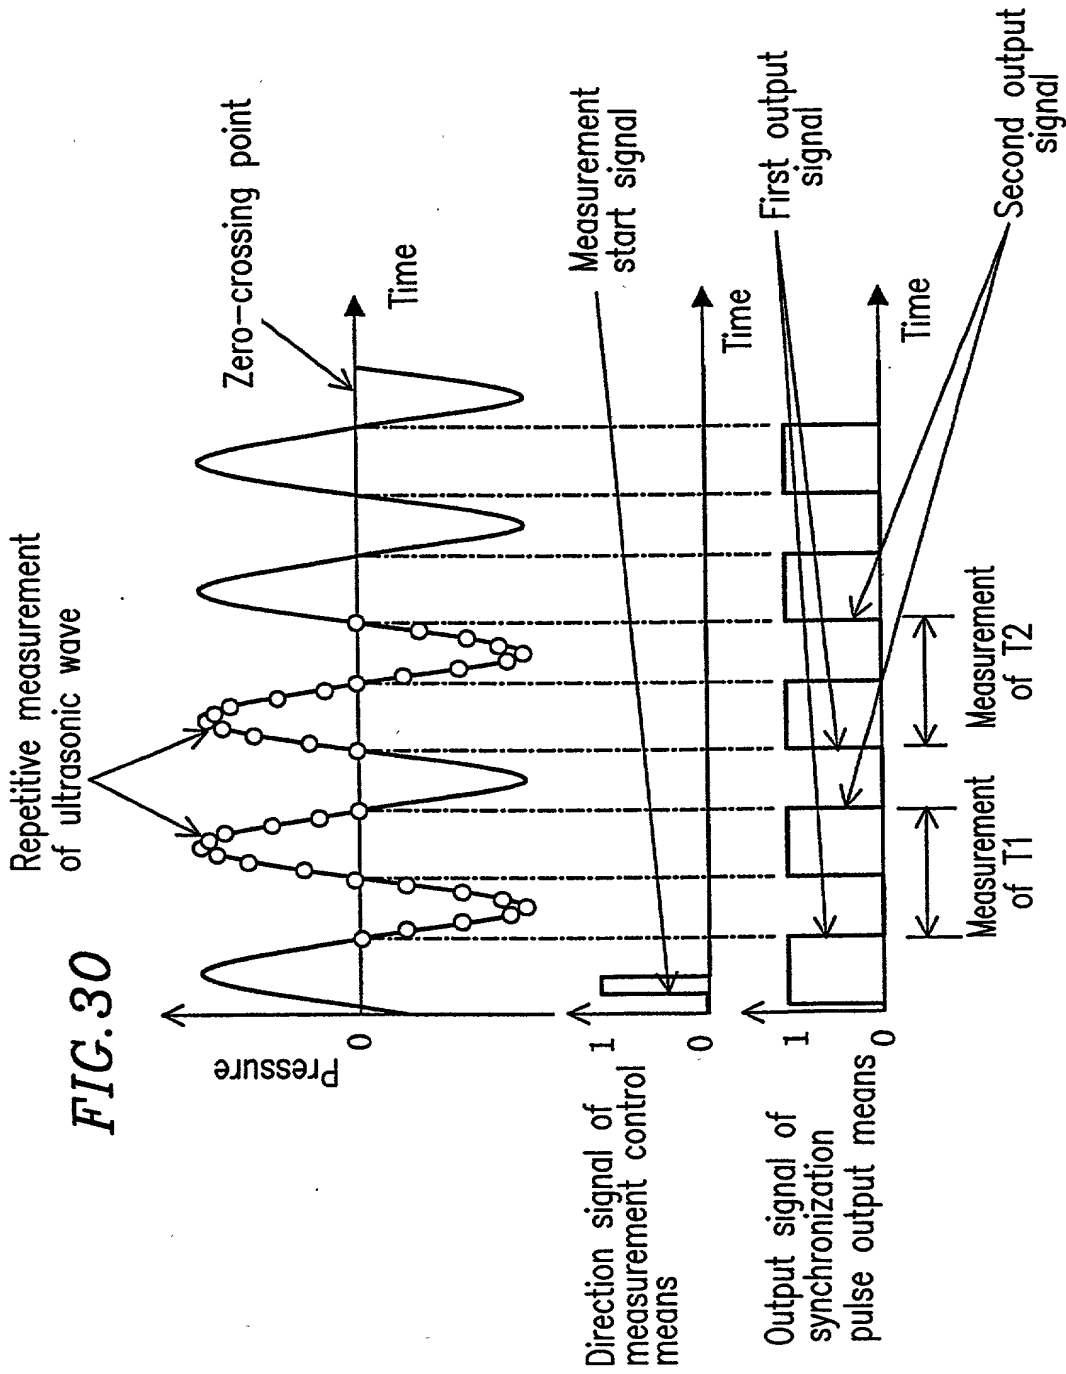

31/65

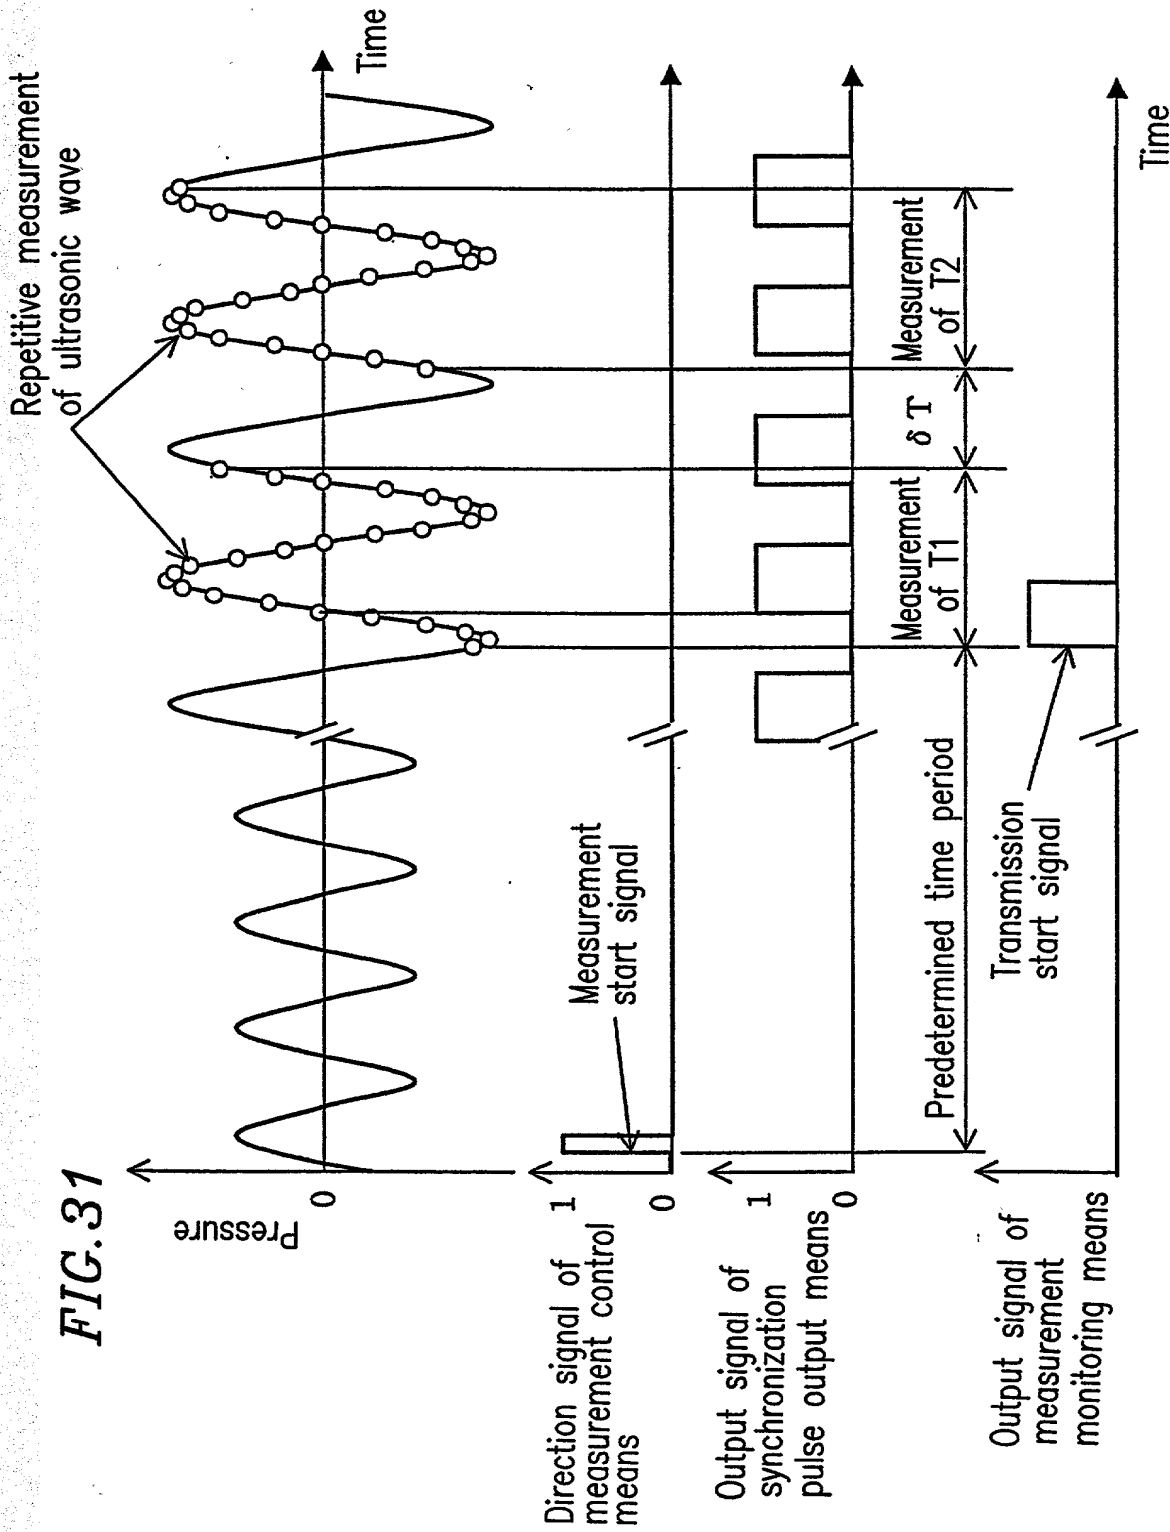

32/65

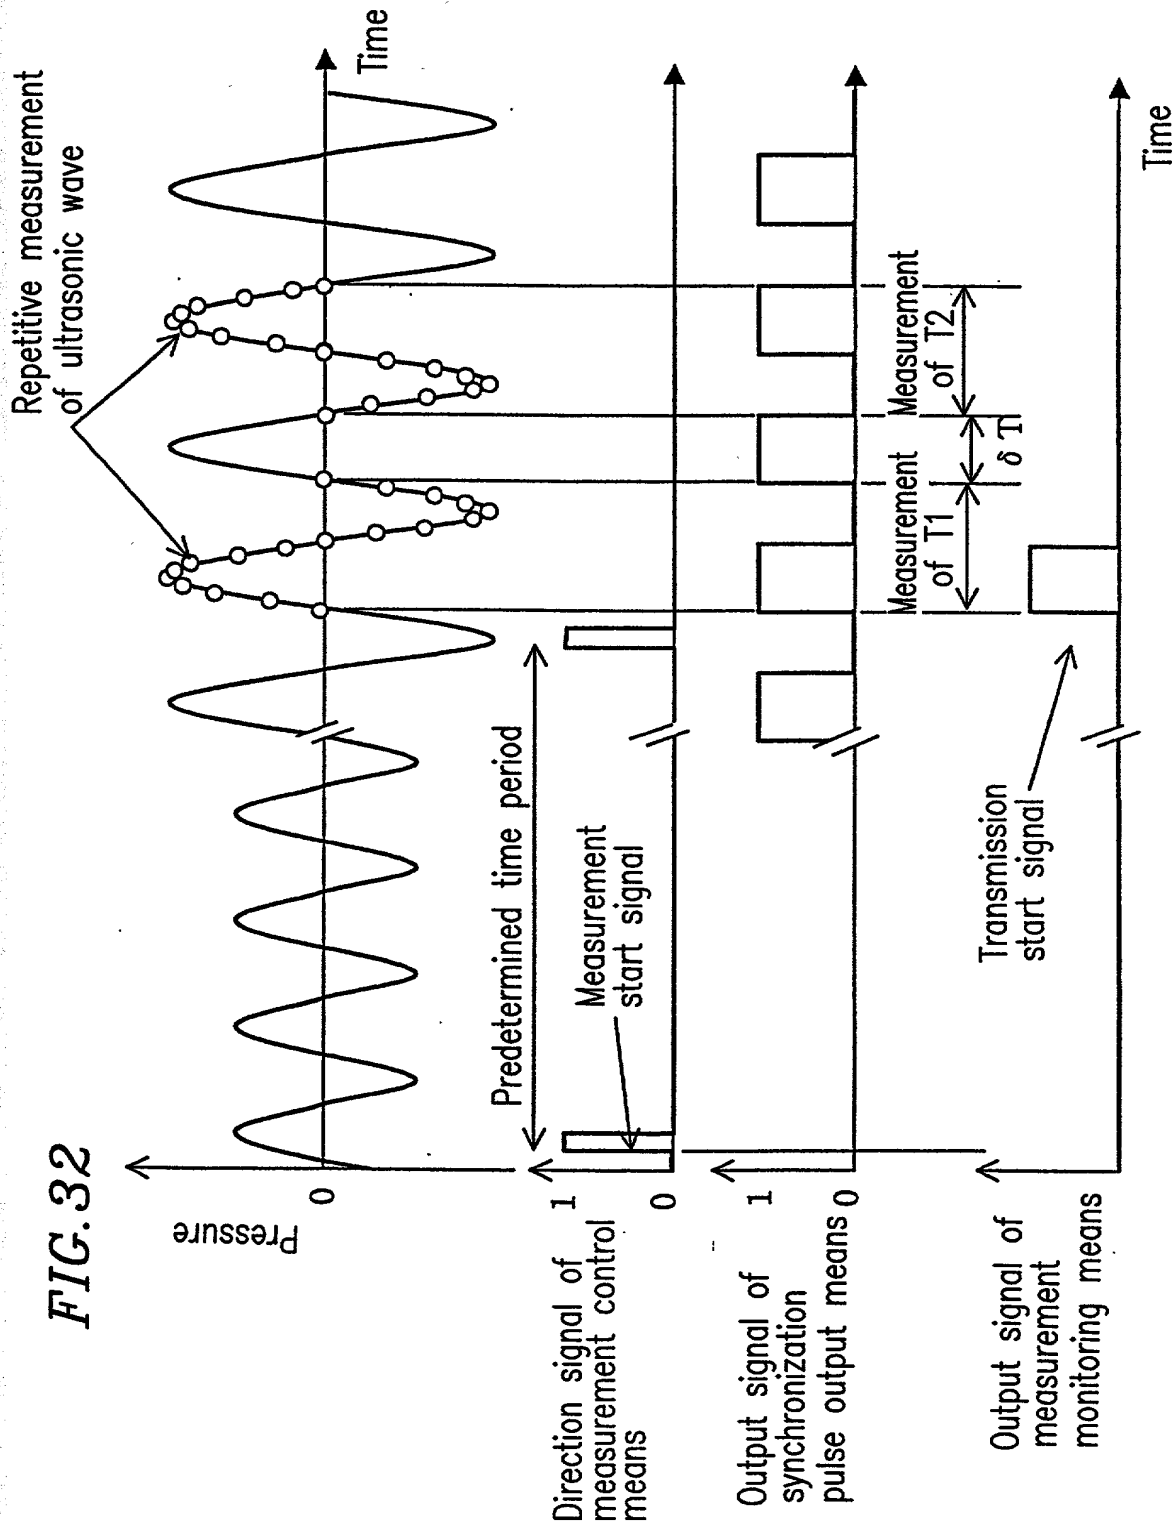

33/65

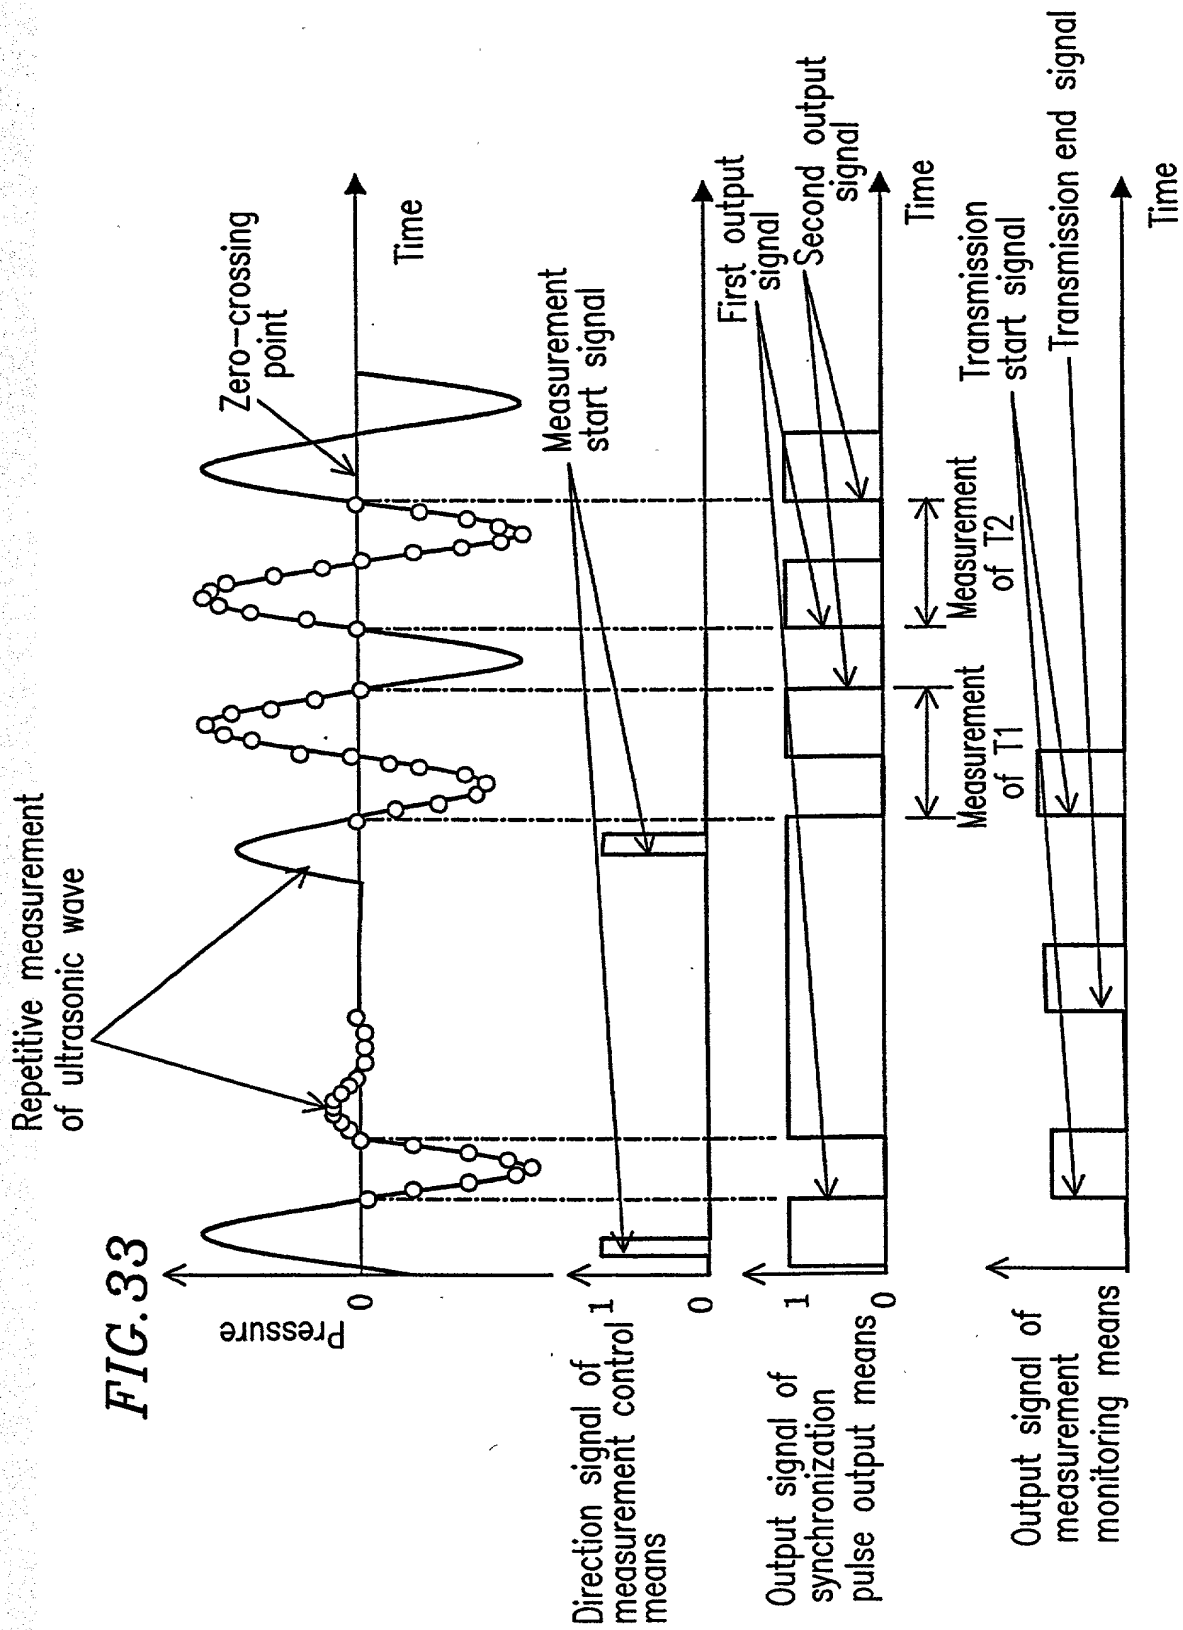


FIG. 34

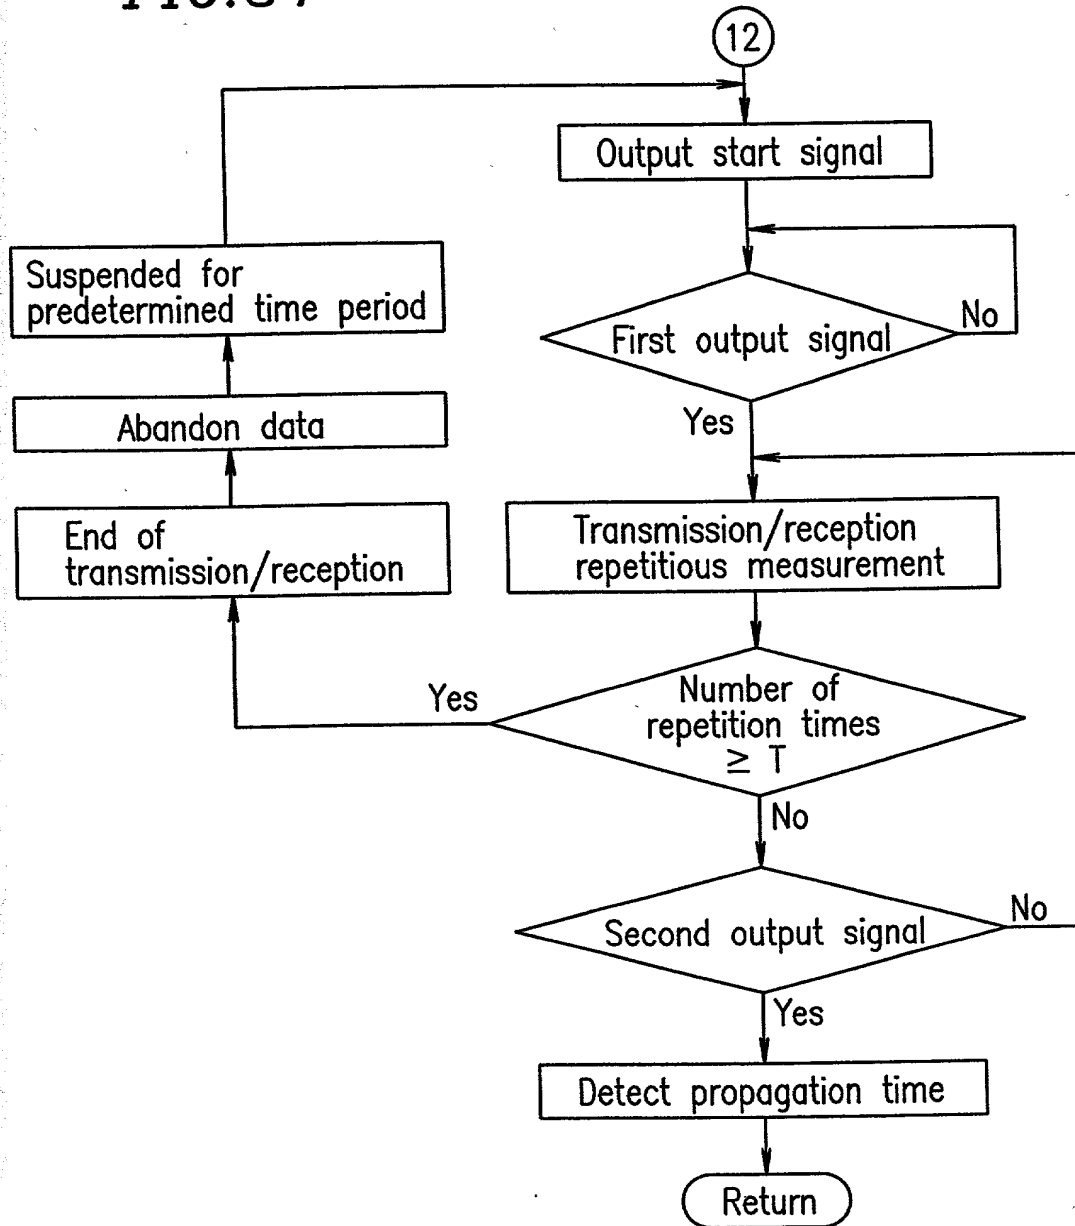


FIG. 35



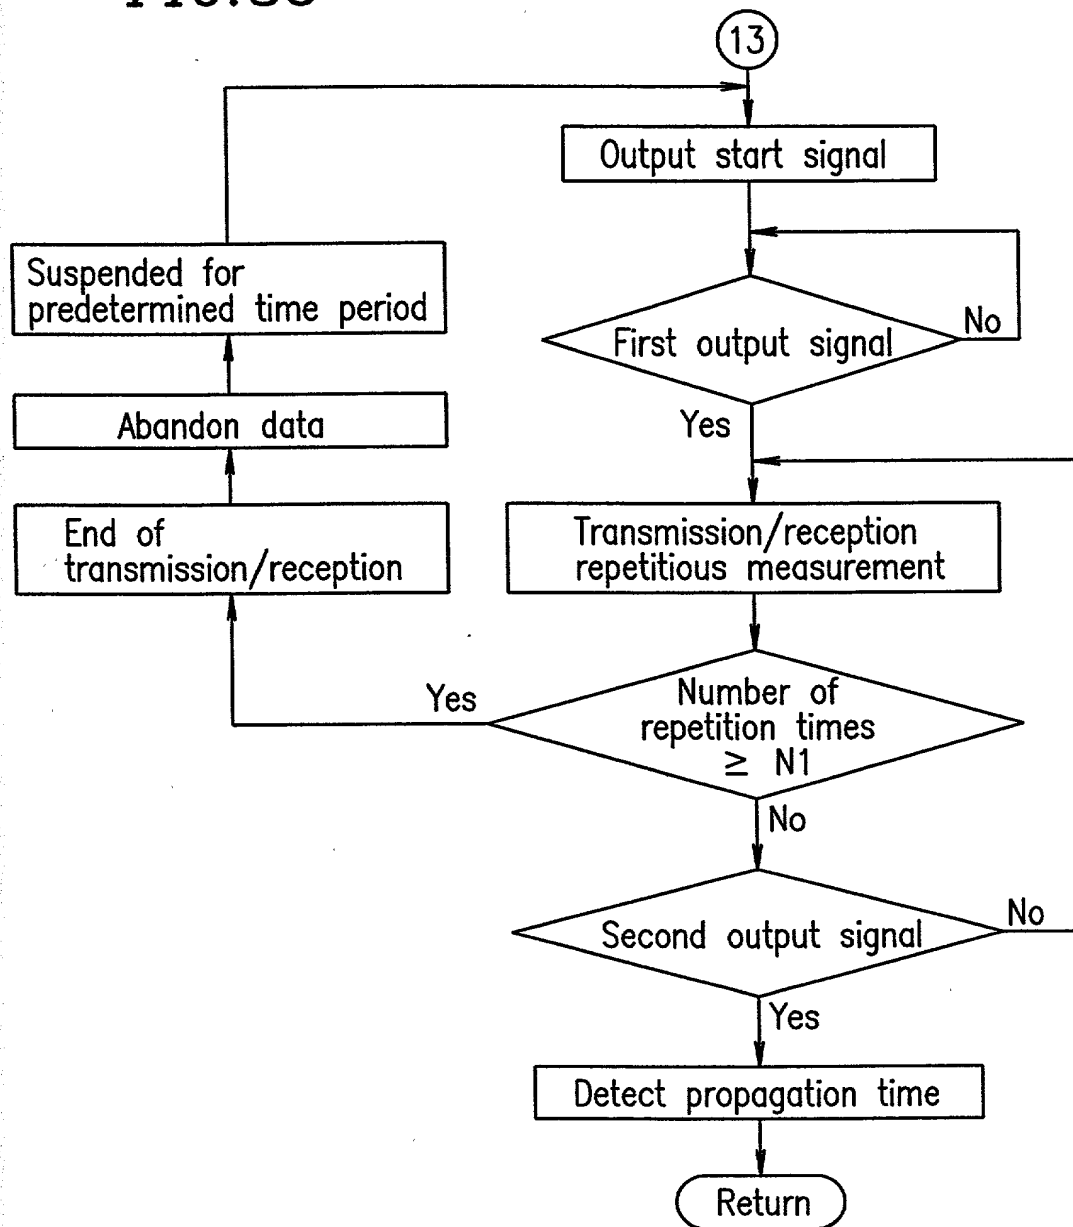


FIG. 36

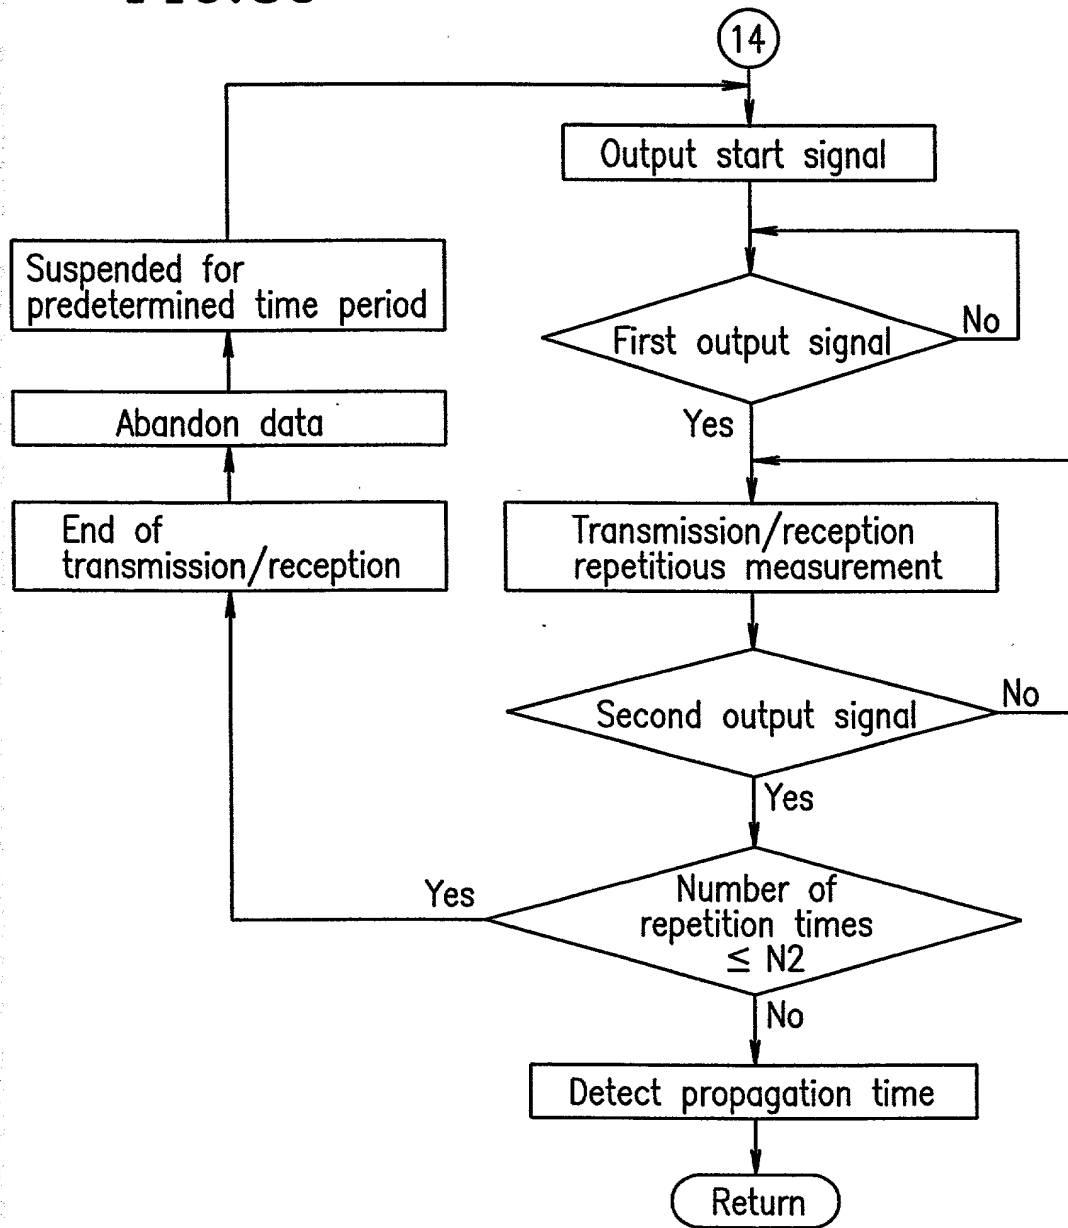


37/65

FIG. 37

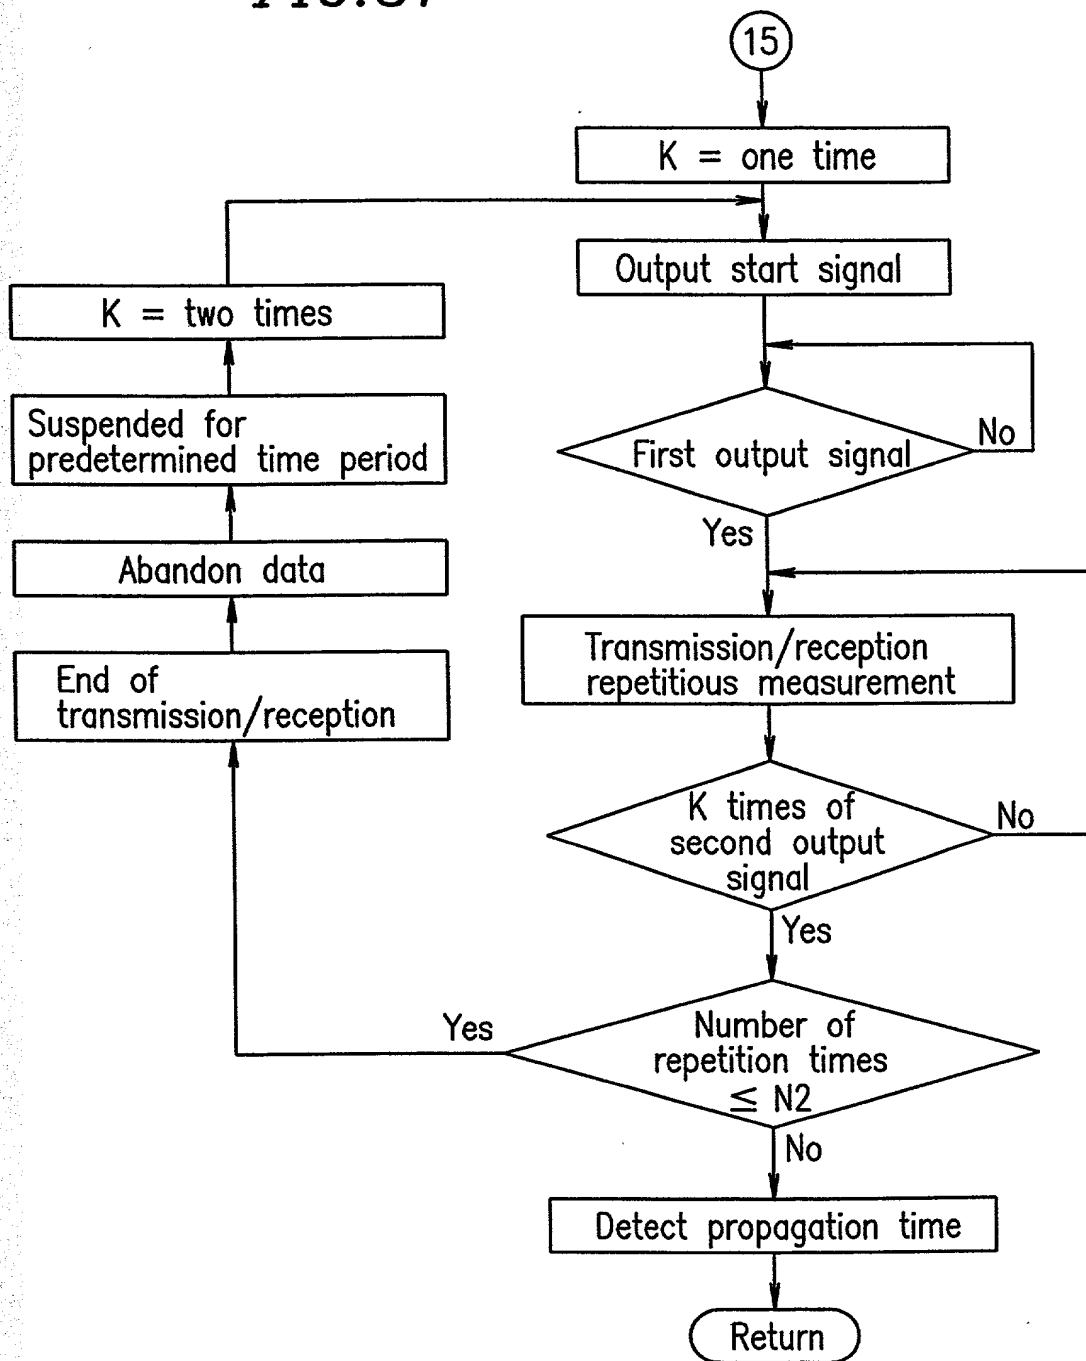


38/65


FIG. 38

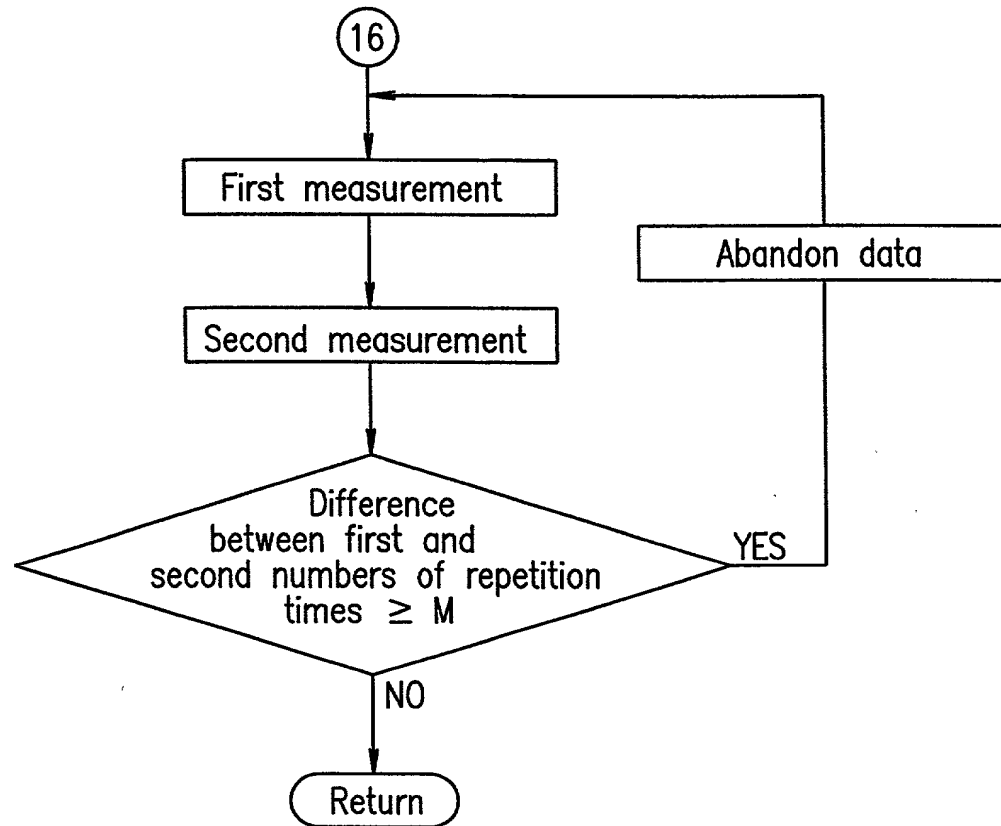


39/65

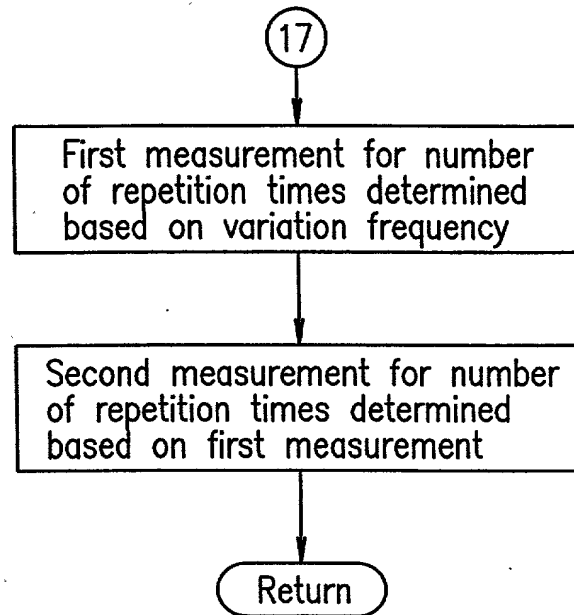FIG. 39

20250903 15:45:03

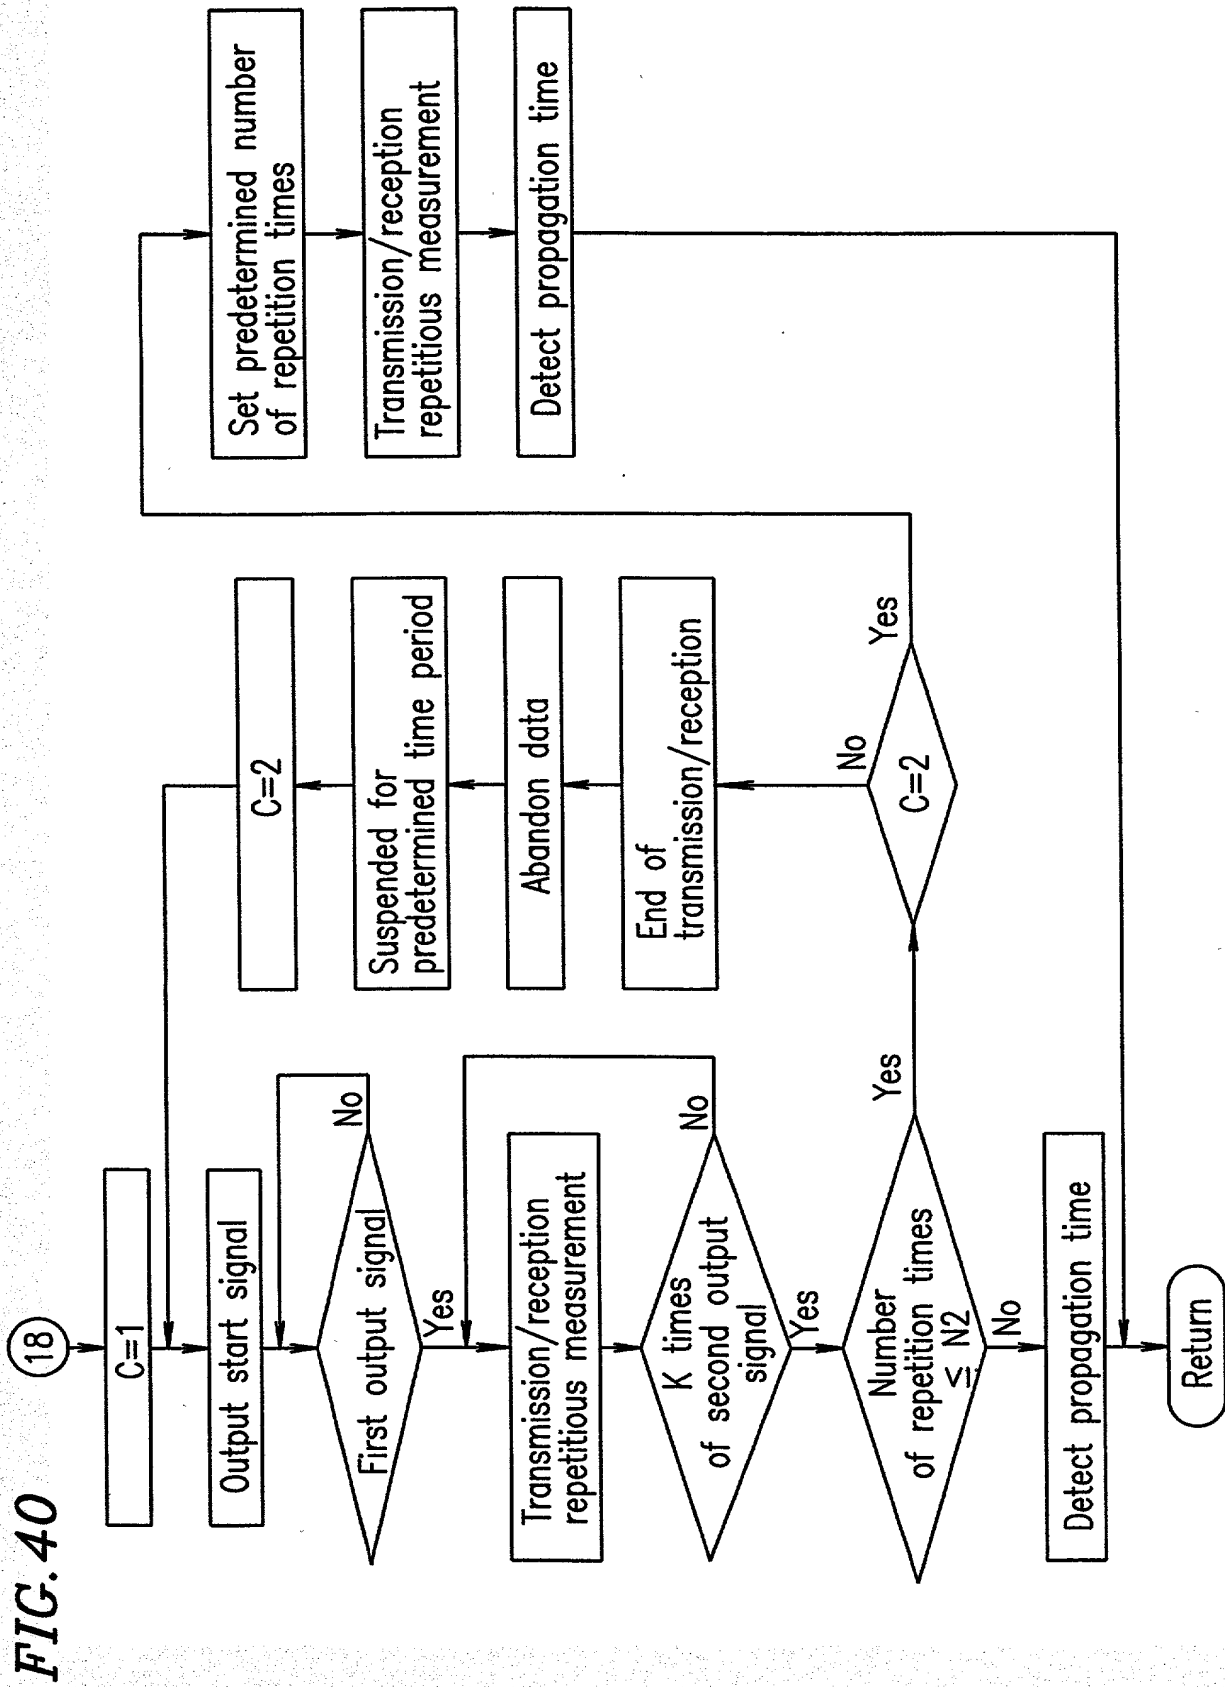

41/65

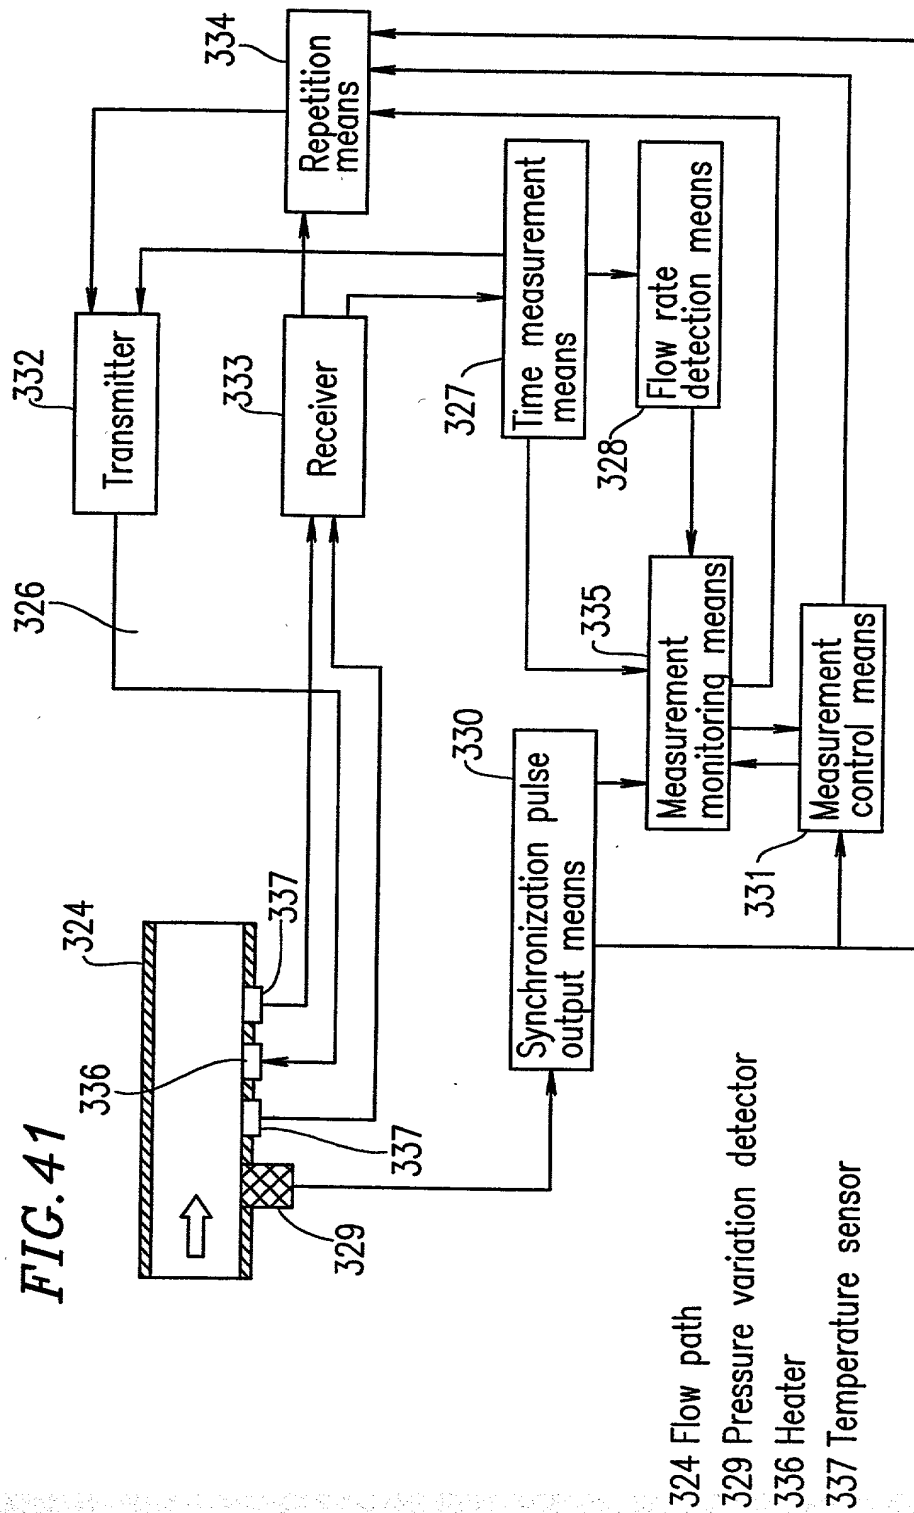

42/65




FIG. 42

FIG. 43



44/65

FIG. 44

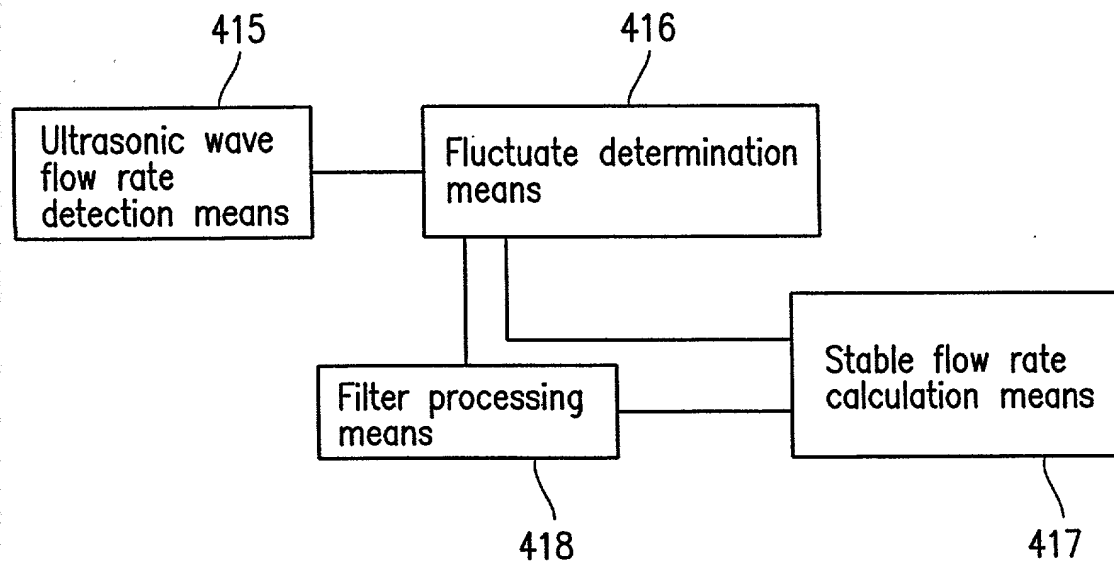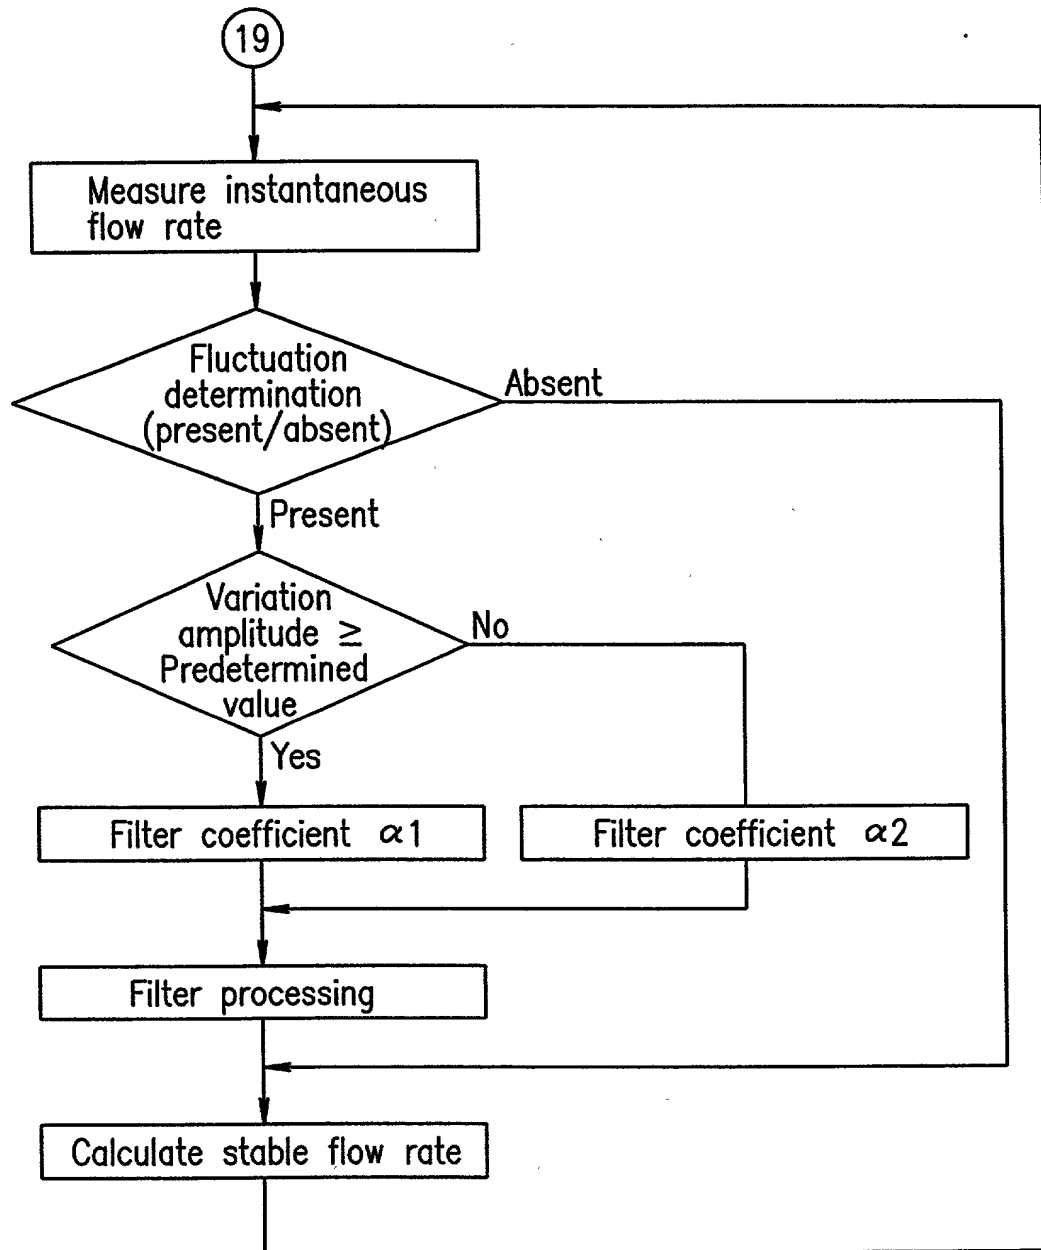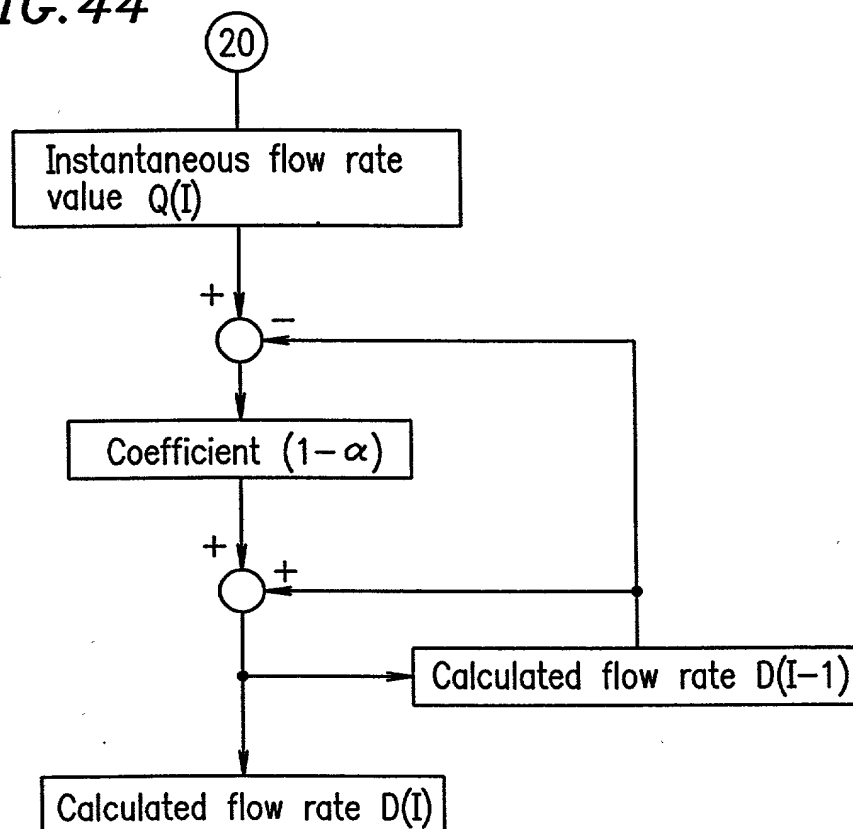

45/65




FIG. 45

FIG. 46



47/65

FIG. 47

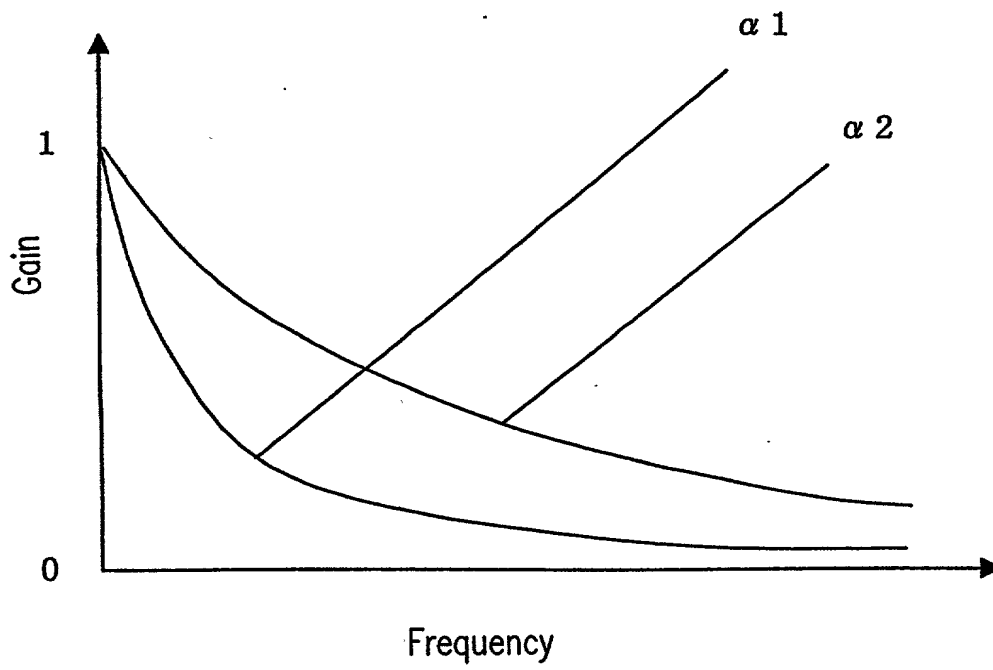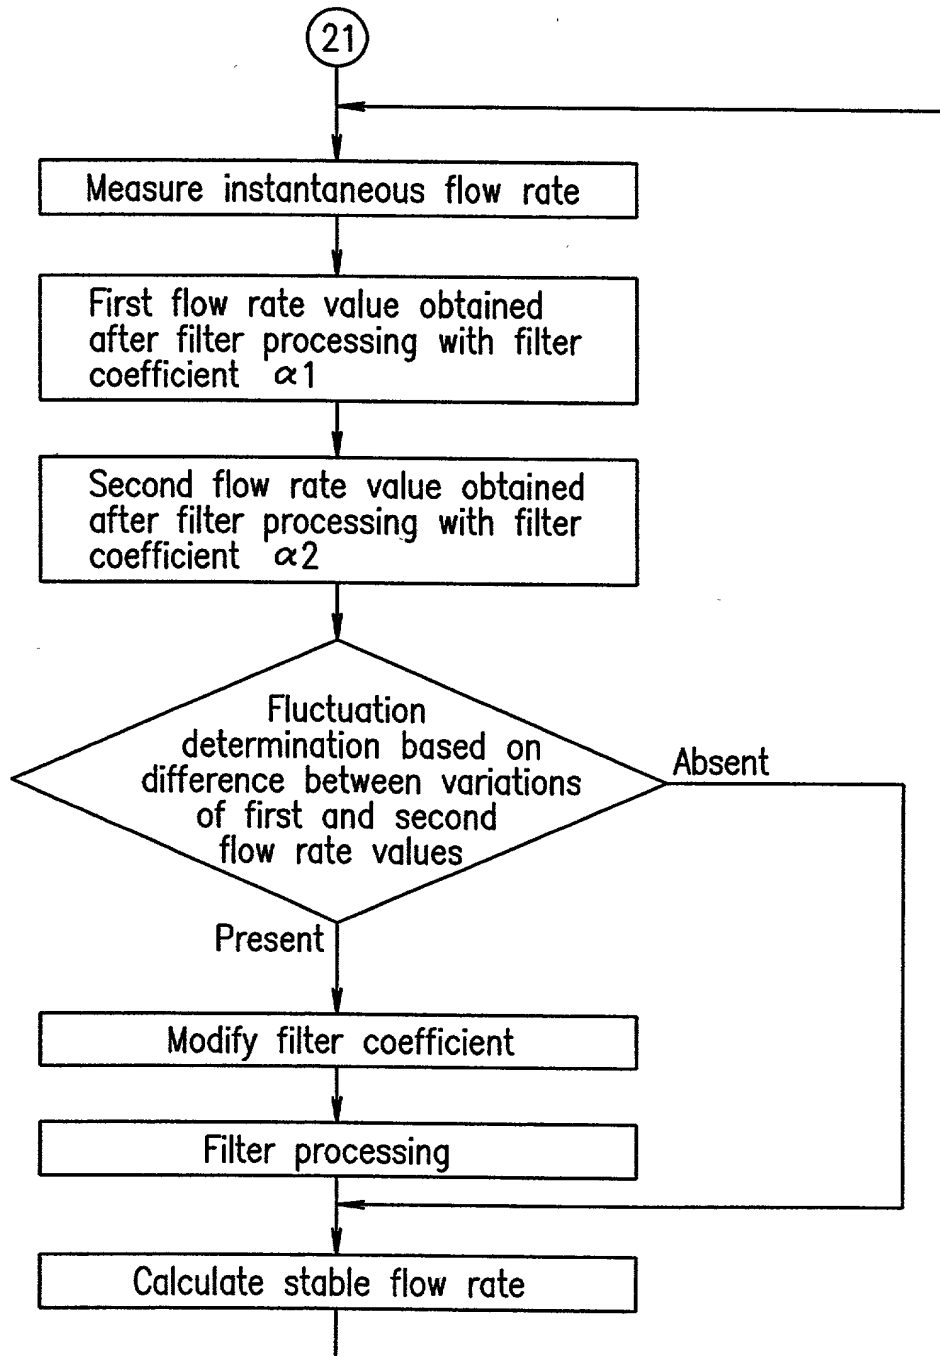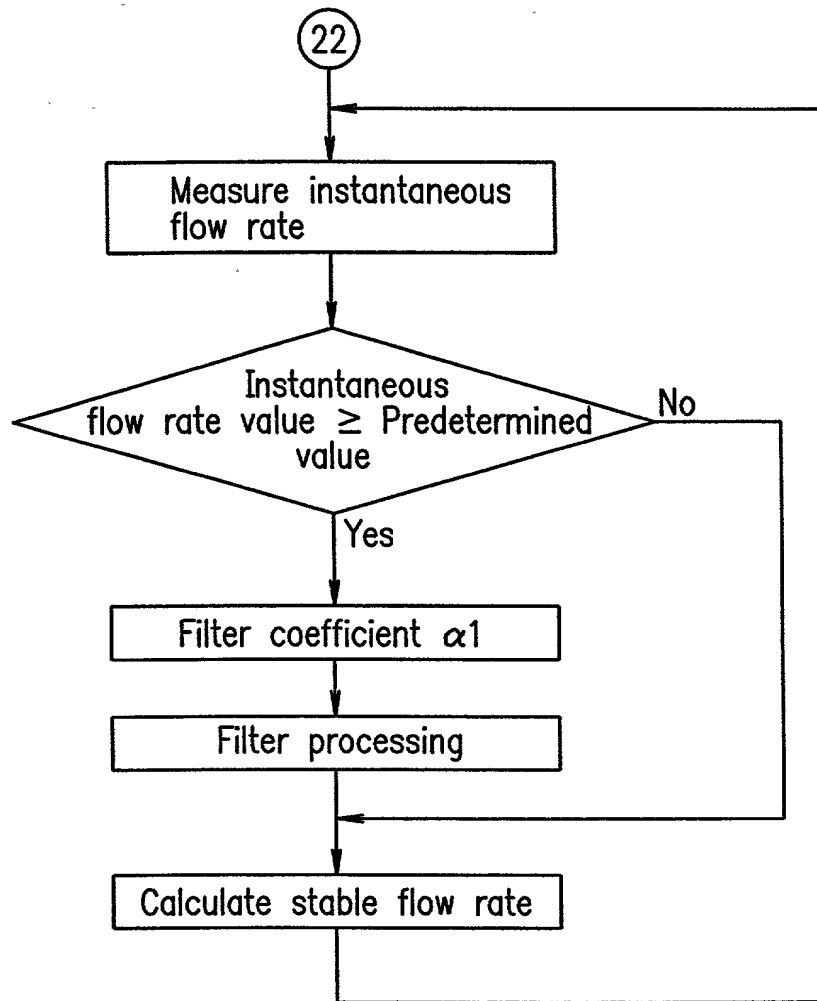

48/65

FIG. 48

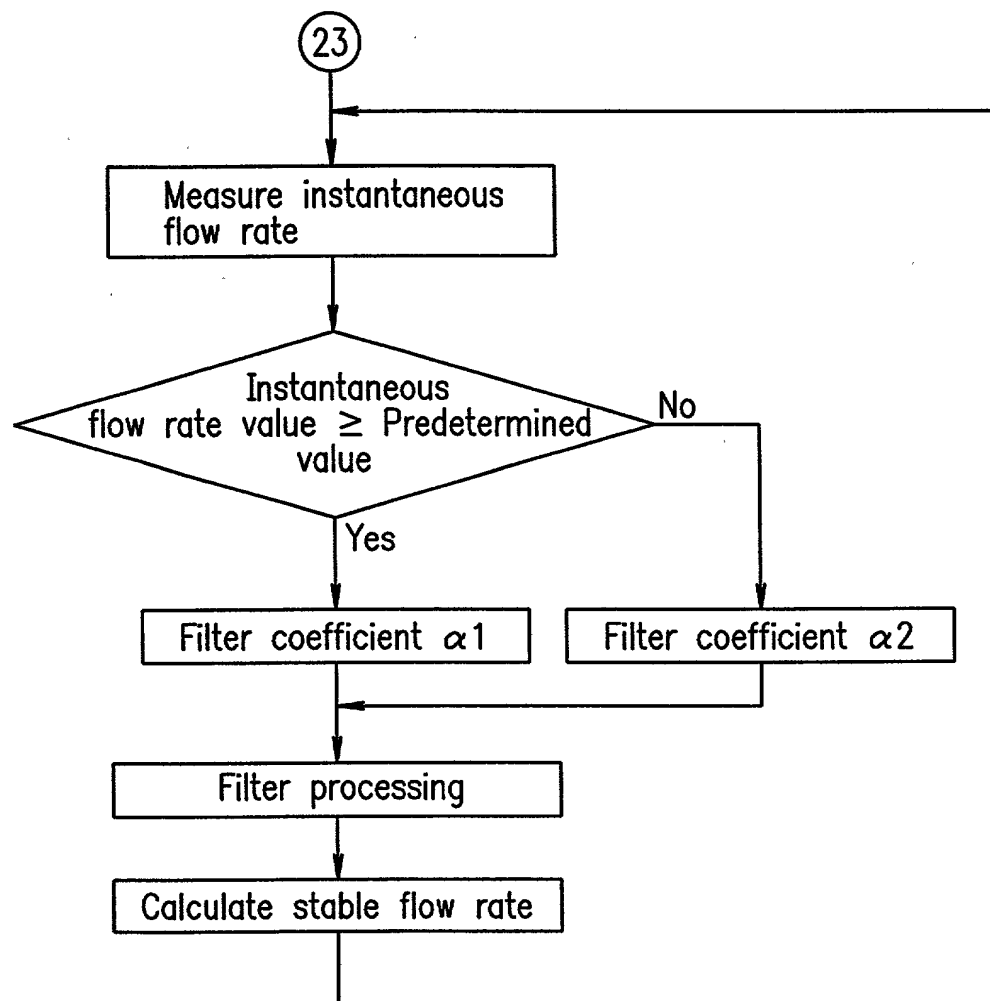


FIG. 49



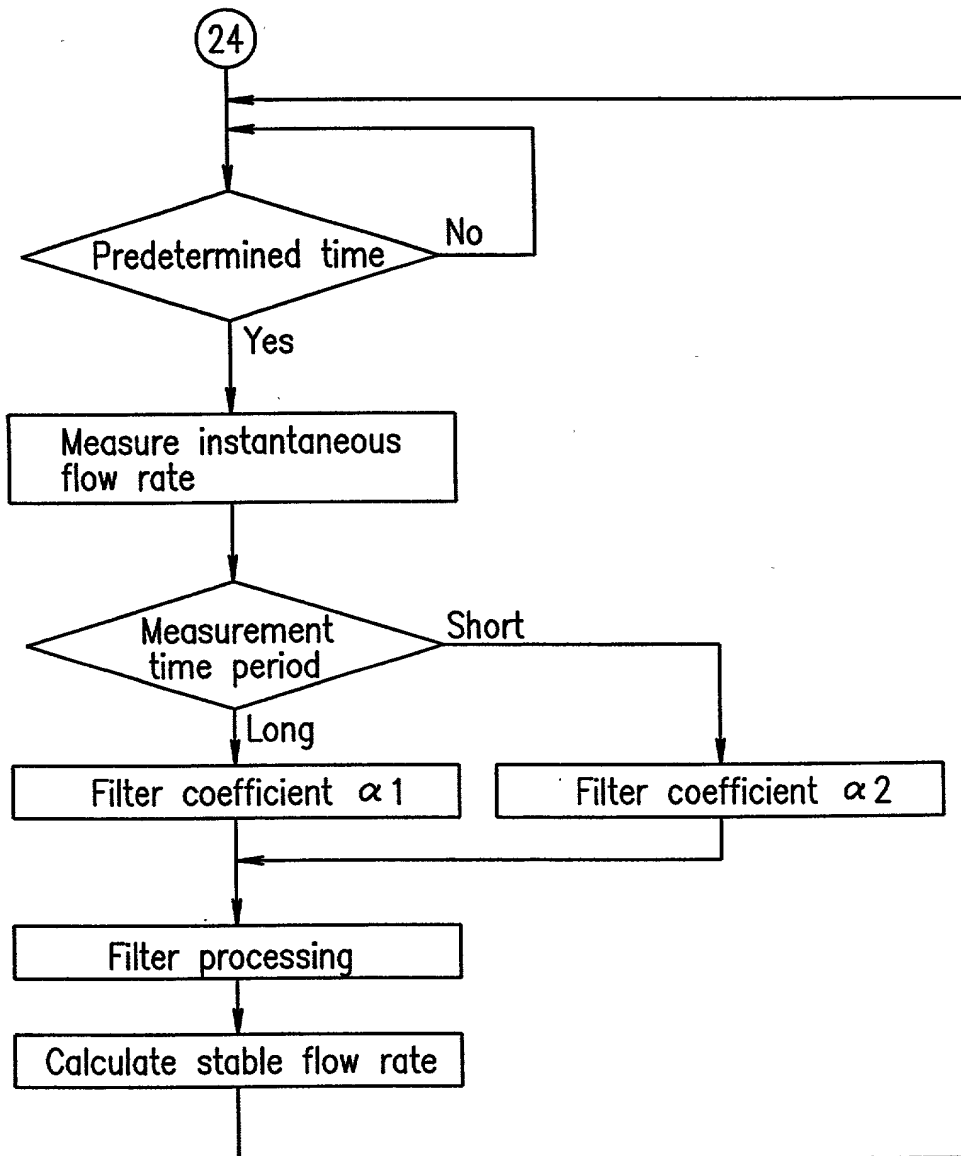


FIG. 50

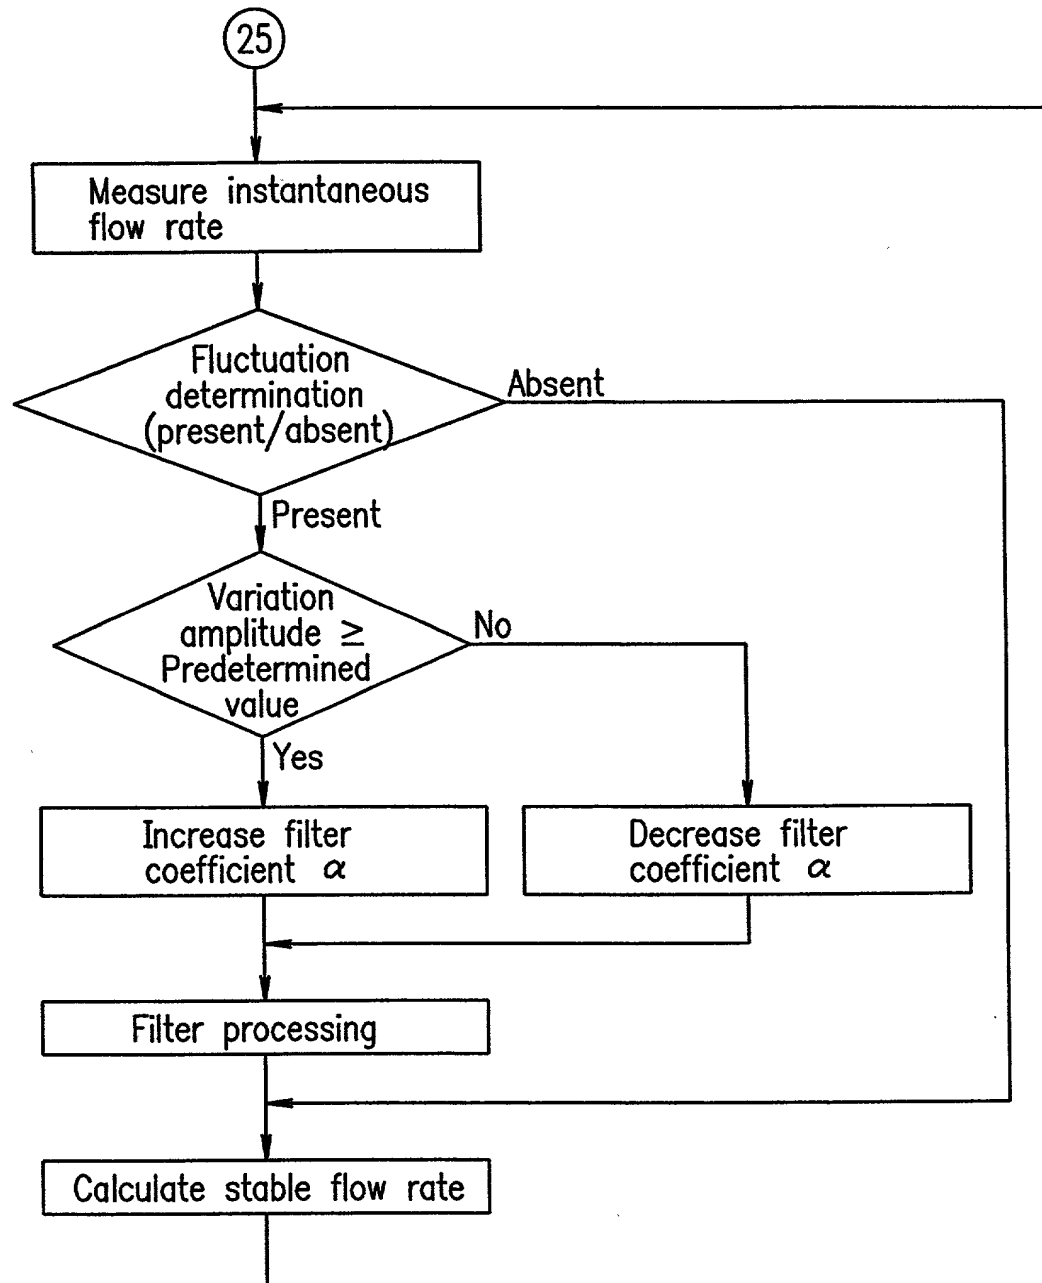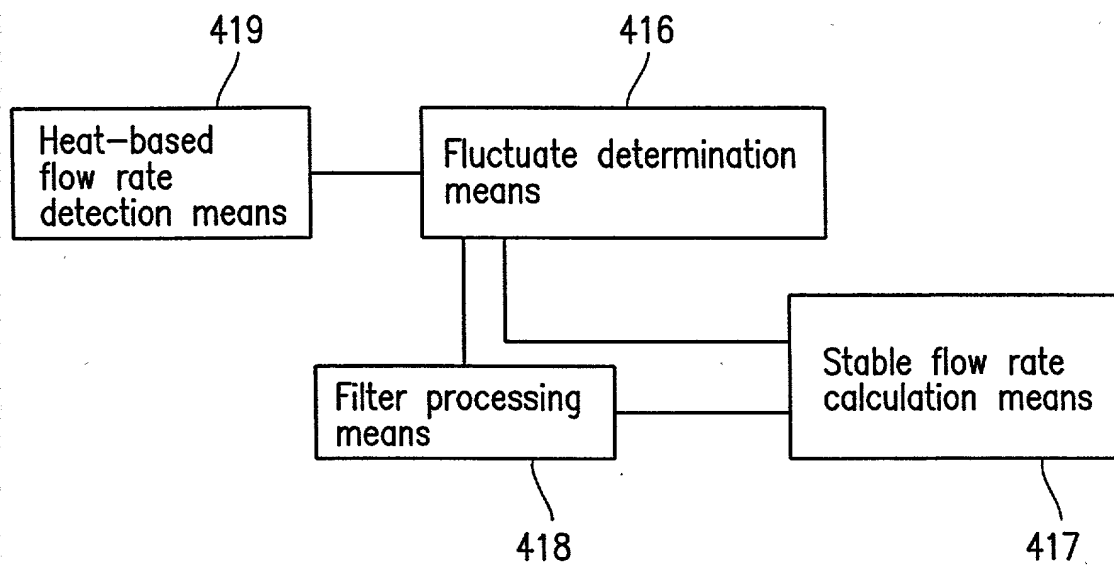


51/65

FIG. 51

52/65

FIG. 52

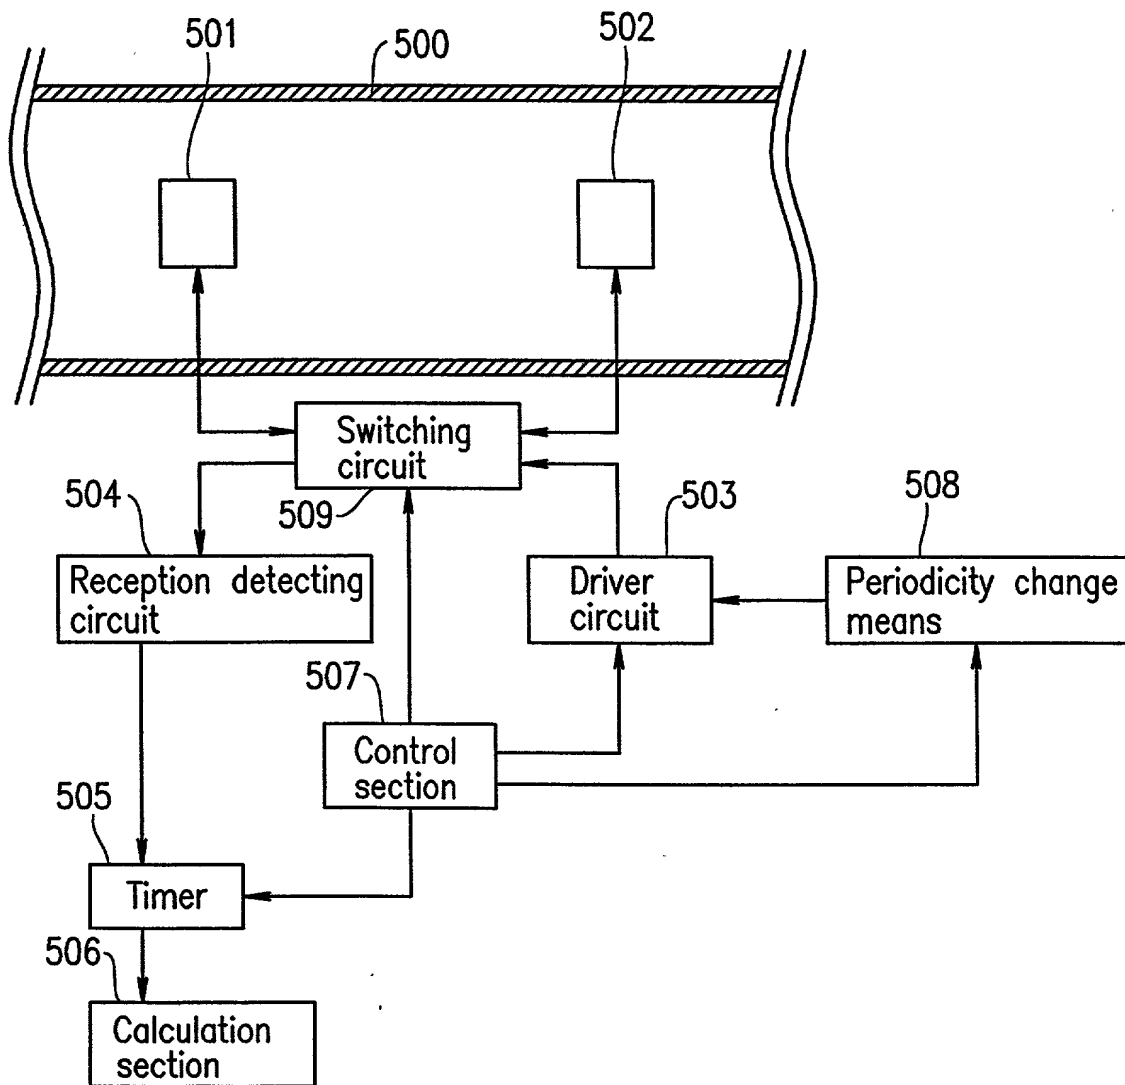

500 Flow rate measurement section

501,502 Ultrasonic wave transducer

503 Driver circuit

504 Reception detecting circuit



505 Timer

507 Control section

506 Calculation section

508 Periodicity change means

53/65

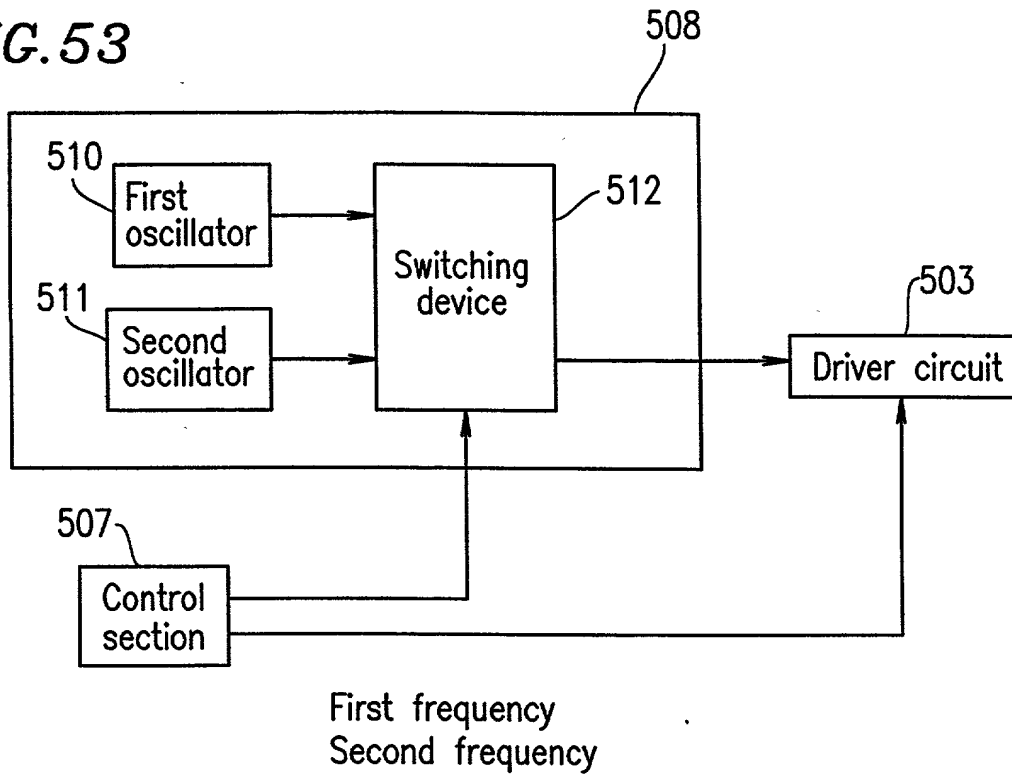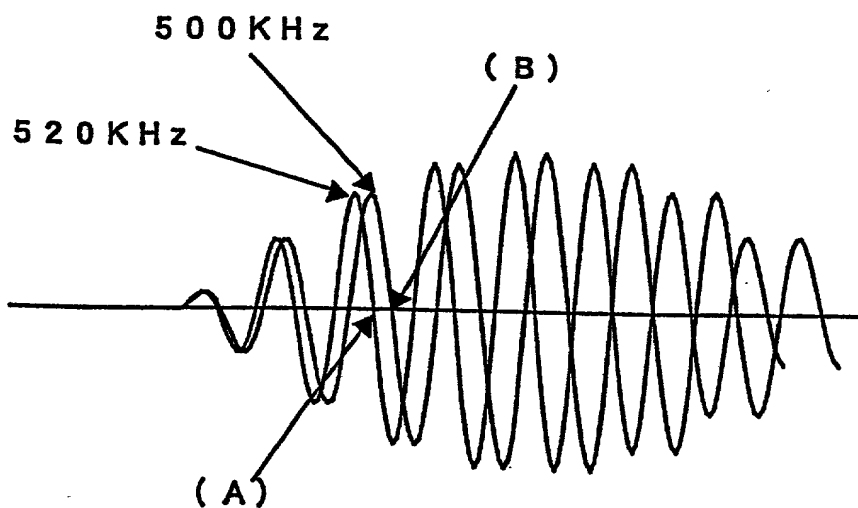FIG. 53**FIG. 54**

54/65

FIG. 55


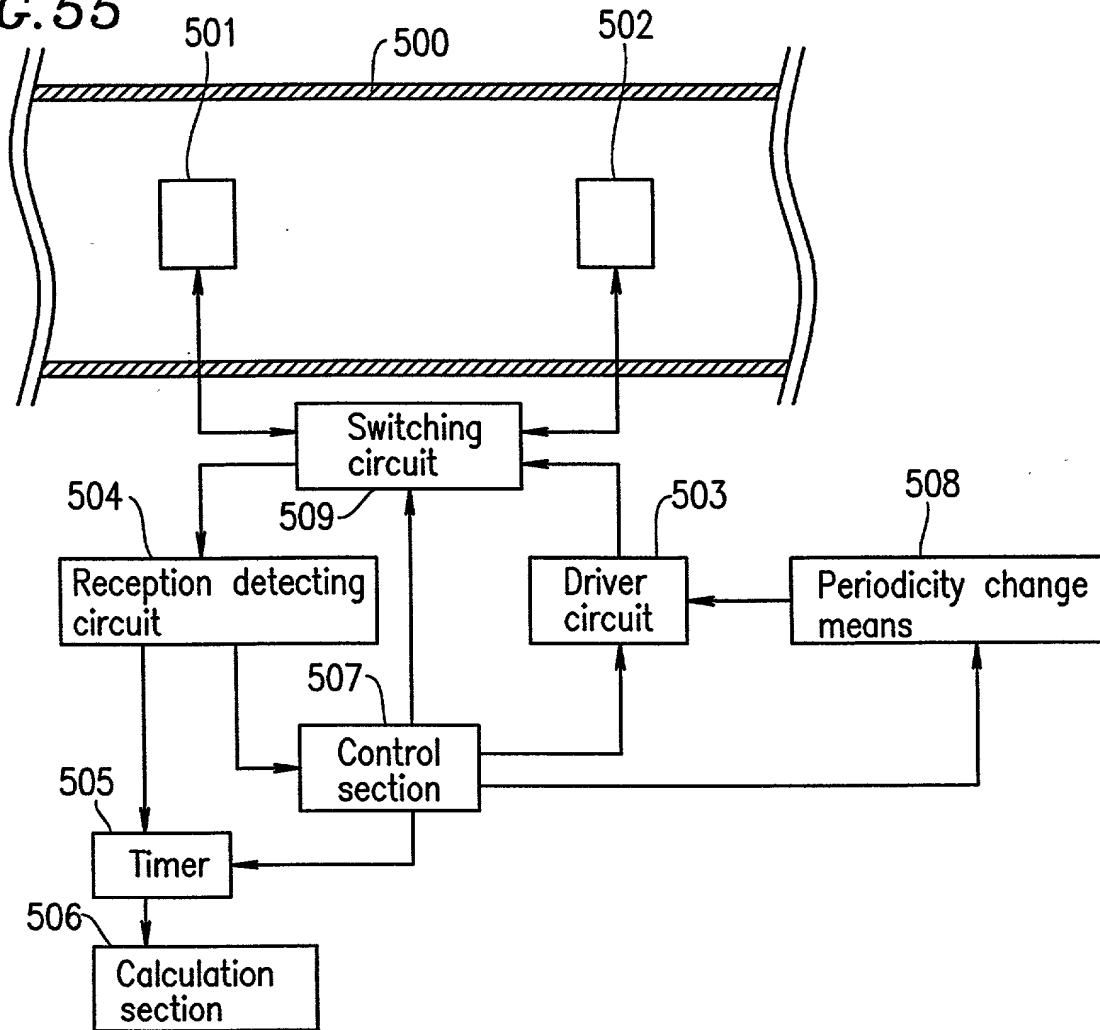


FIG. 56

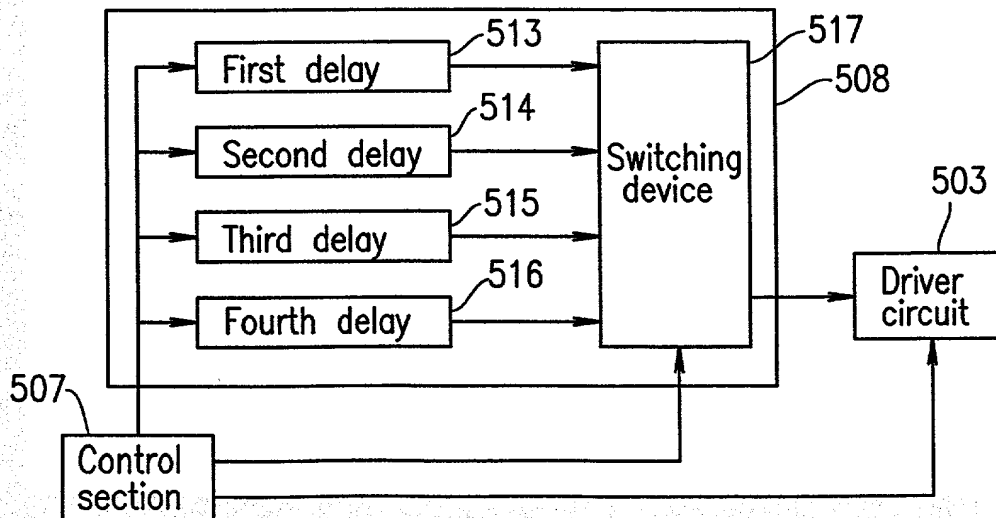

55/65

FIG. 57A


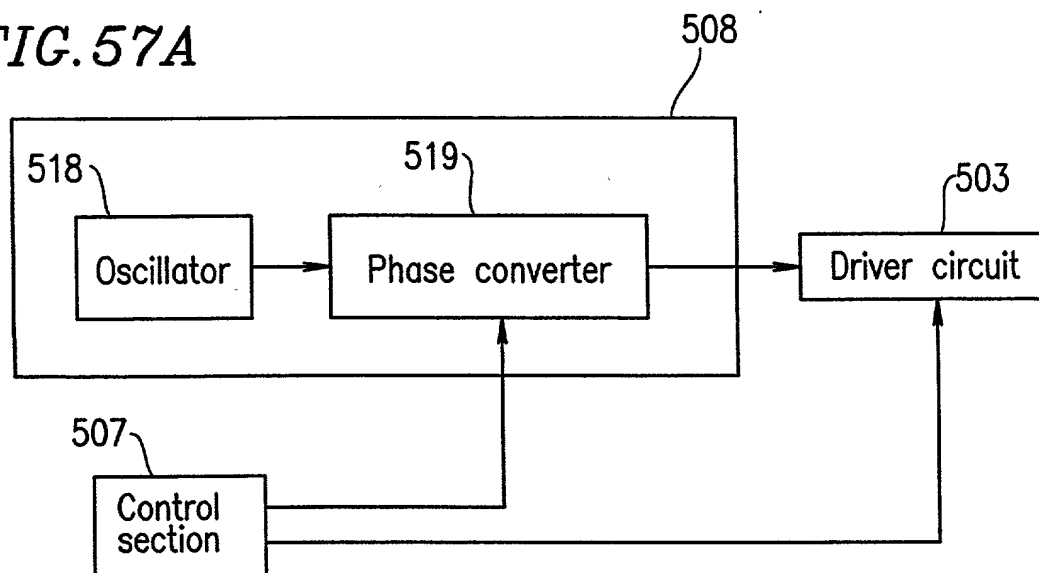


FIG. 57B

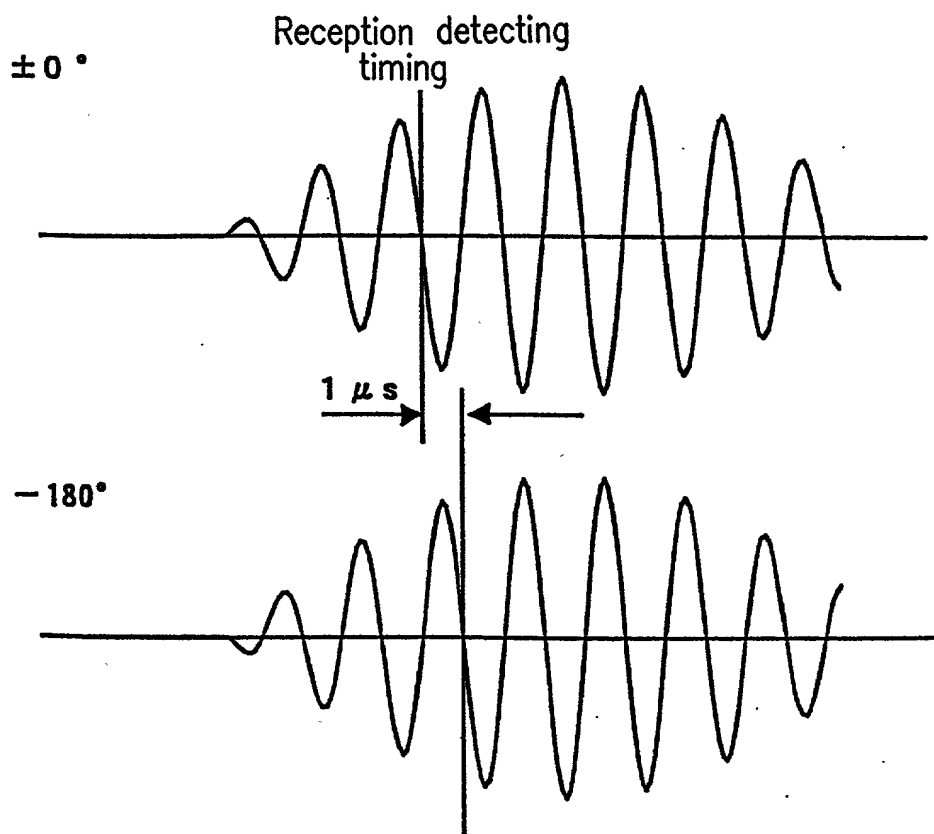

56/65

FIG. 58

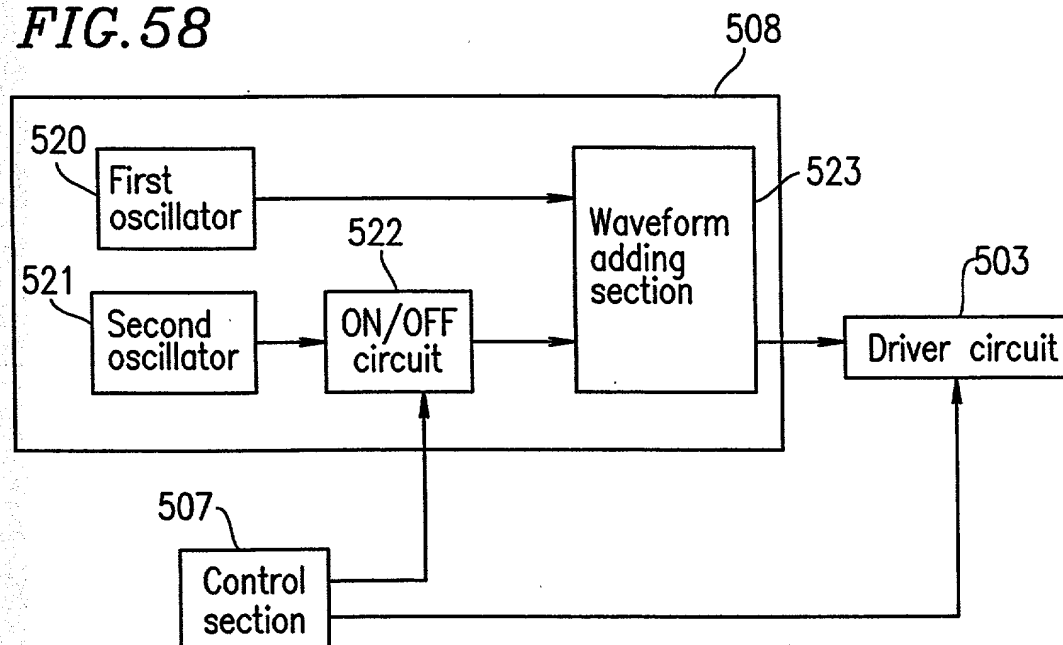


FIG. 59



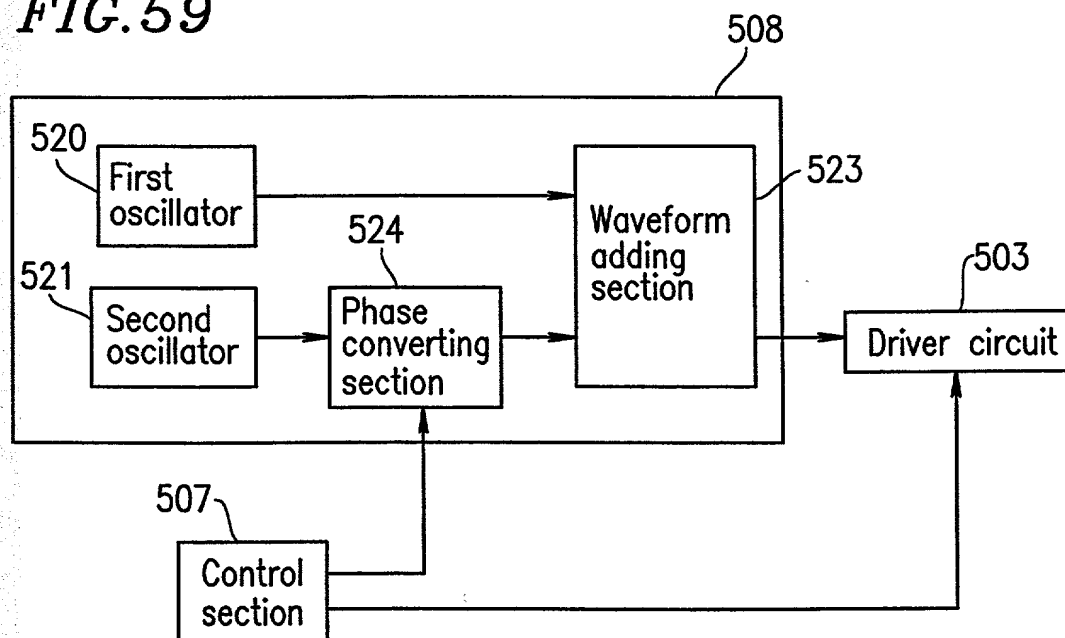


FIG. 60

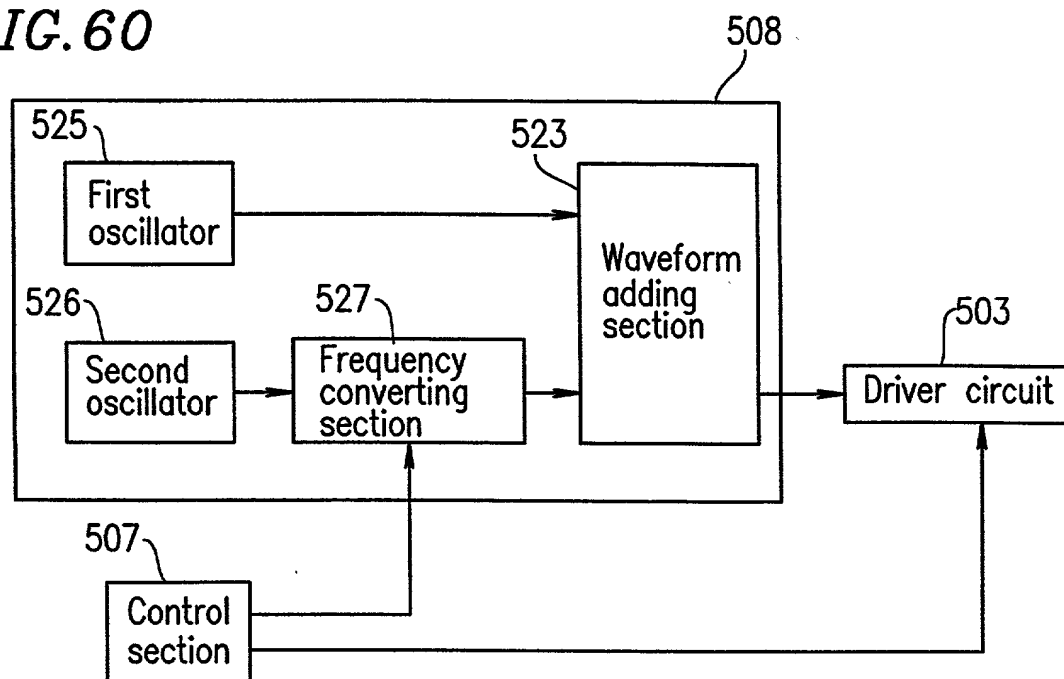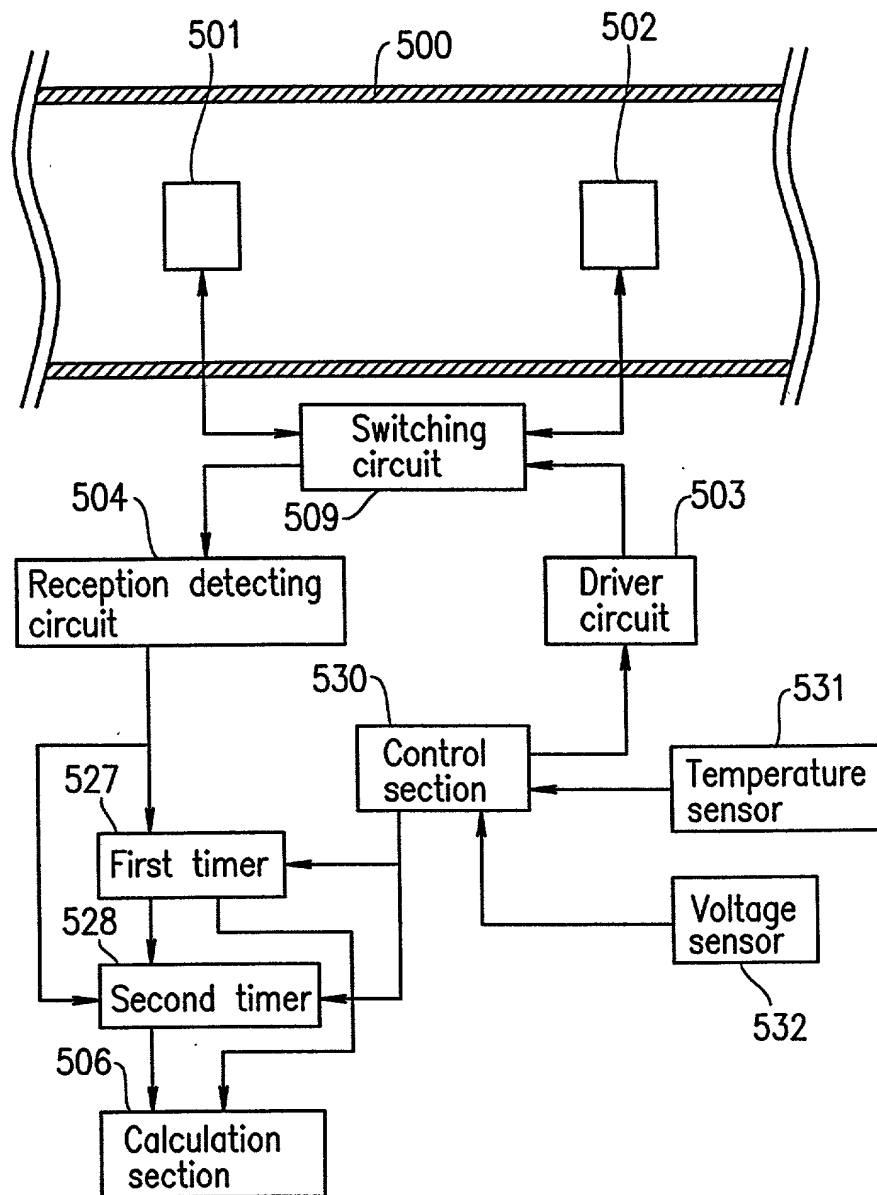


58/65

FIG. 61


- 527 First timer
- 528 Second timer
- 531 Temperature sensor
- 532 Voltage sensor

59/65

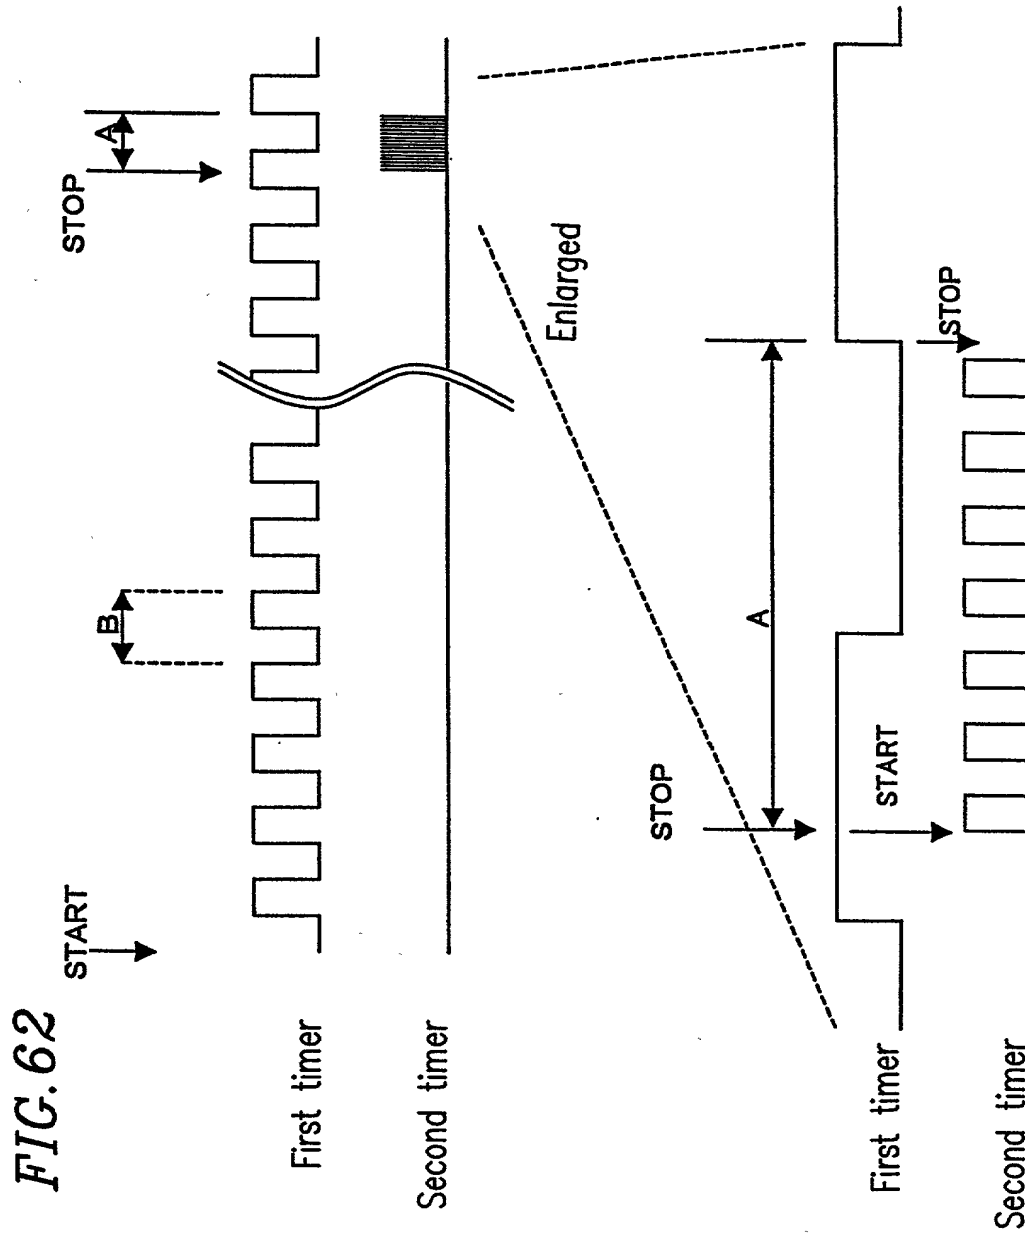


60/65

FIG. 63

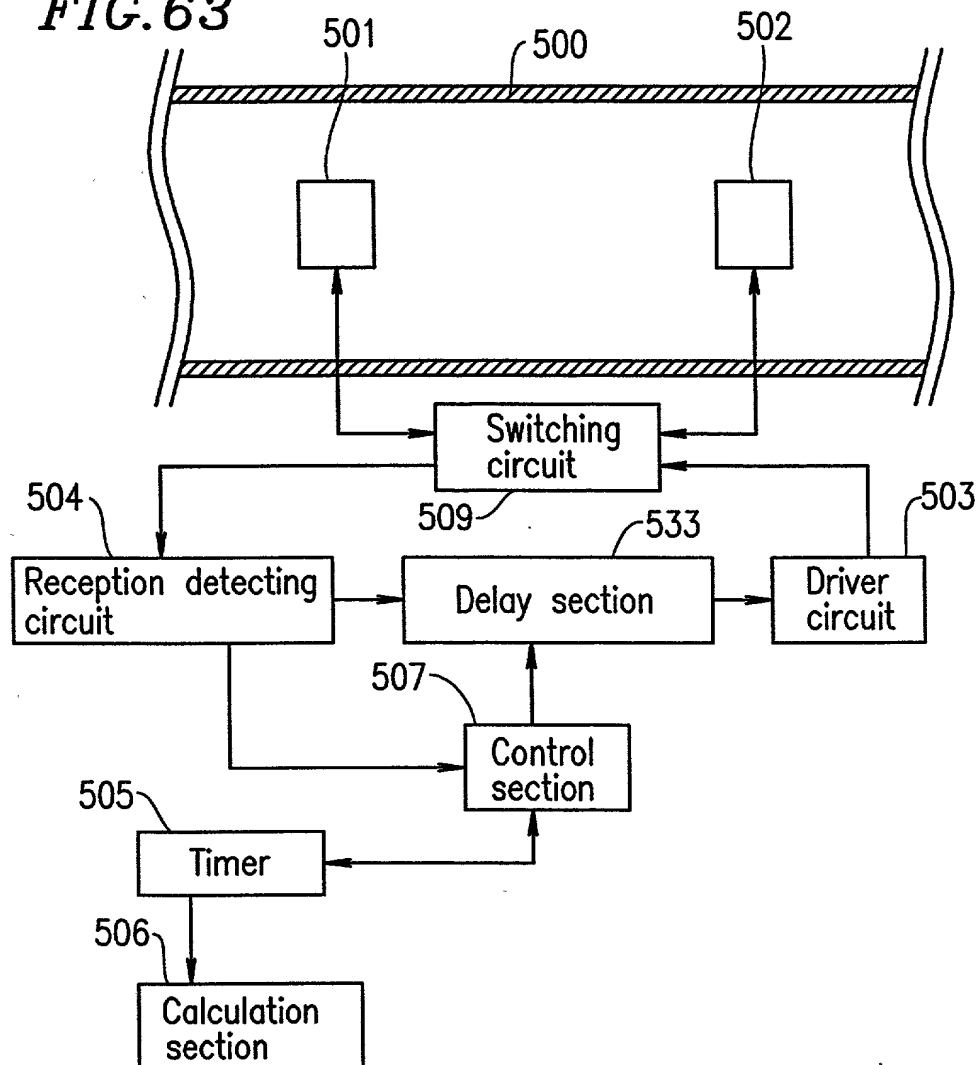


533 Periodicity stabilization means Delay section

FIG. 64

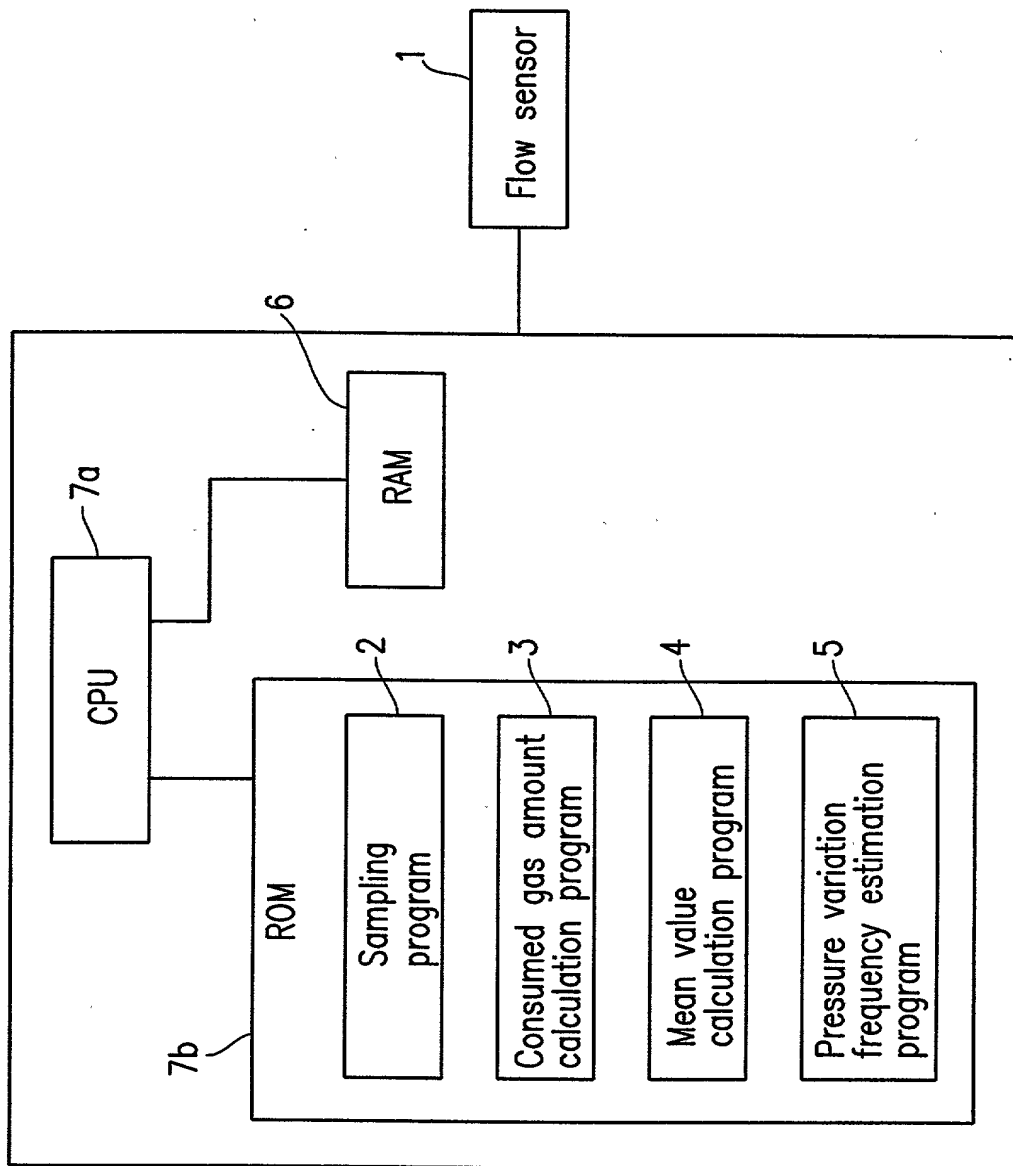


62/65

FIG. 65

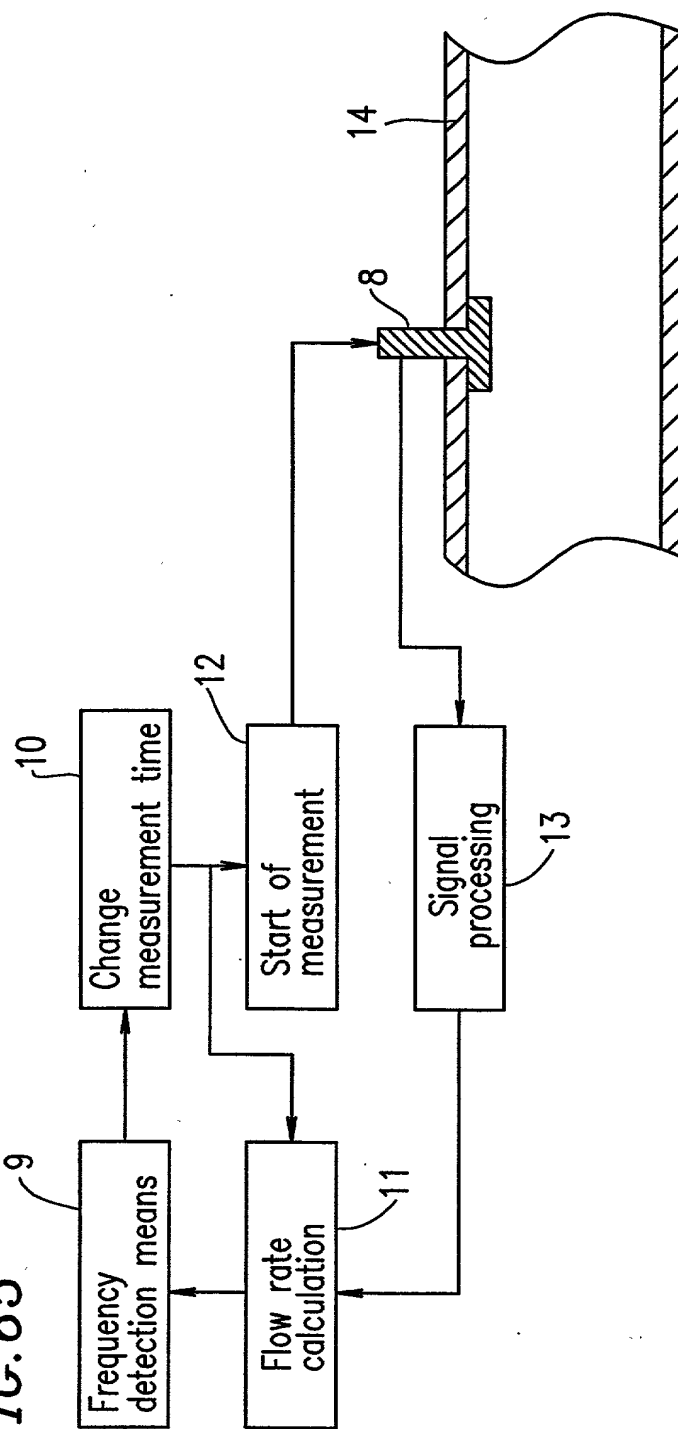

63/65

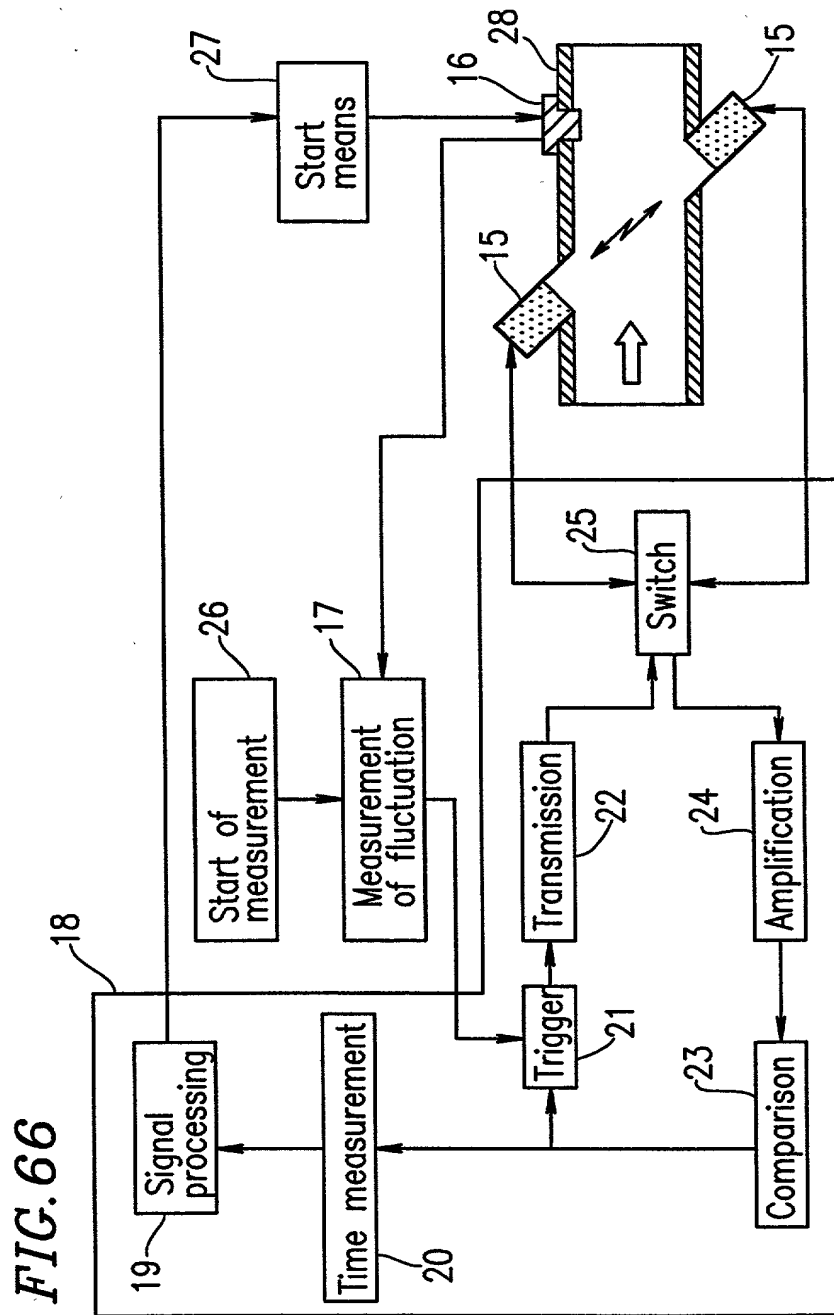

64/65

FIG. 67

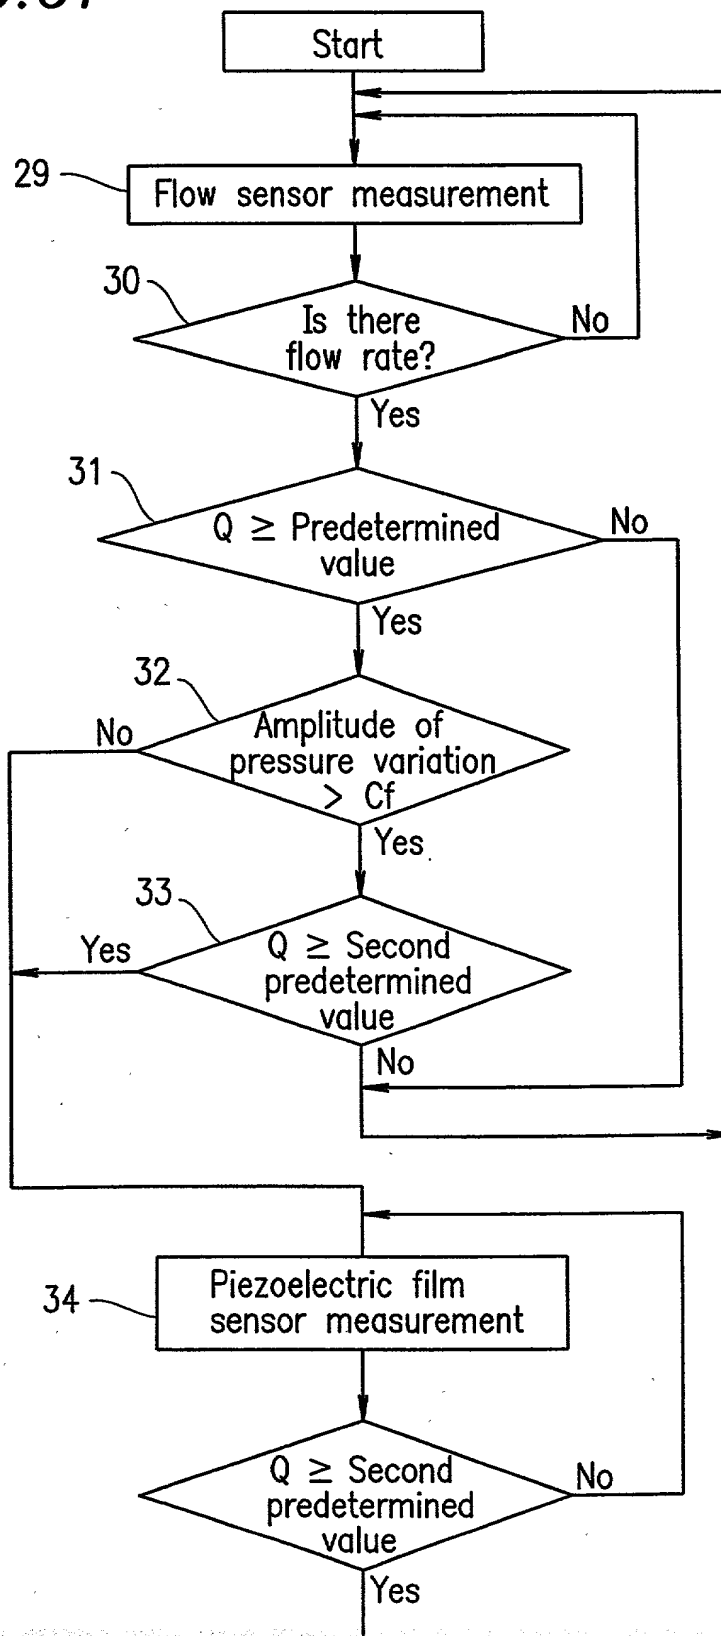
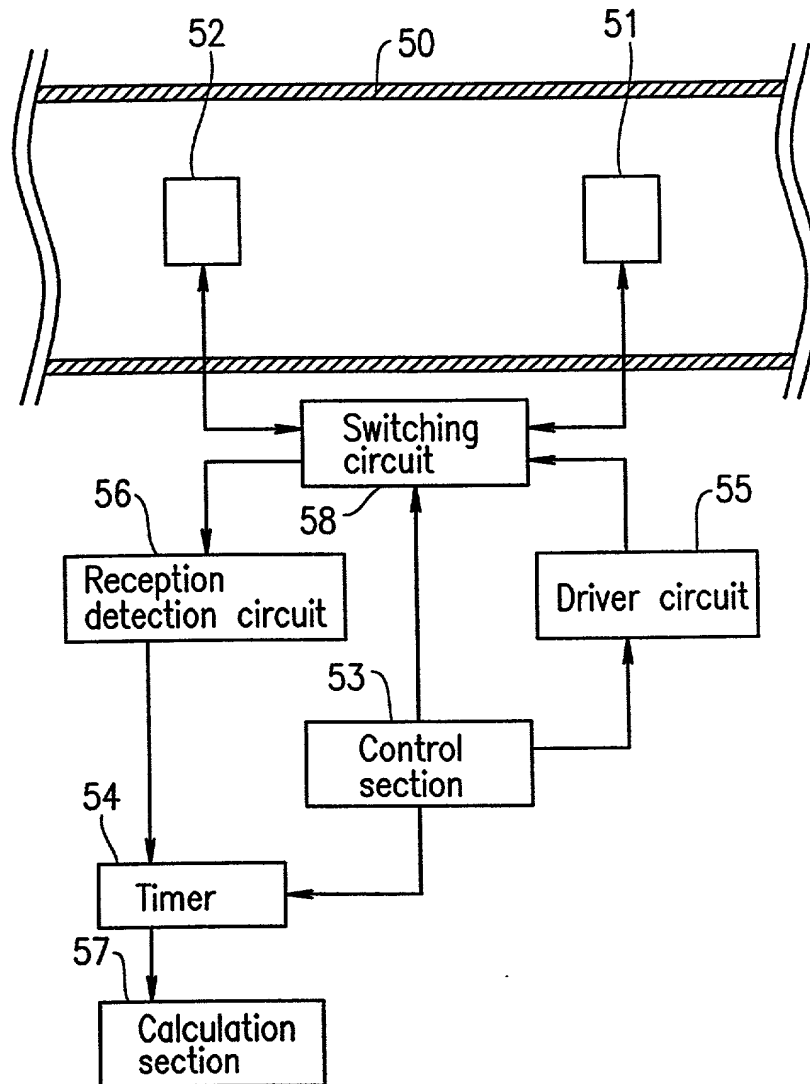


FIG. 68

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12/97)

Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) <input type="checkbox"/> Declaration Submitted with Initial Filing OR <input checked="" type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16(e)) required)	Attorney Docket Number	29288.4600
	First Named Inventor	Yasuhiro UMEKAGE
	COMPLETE IF KNOWN	
	Application Number	10/019,418
	Filing Date	December 21, 2001
	Group Art Unit	To be assigned
	Examiner Name	To be assigned

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

FLOWMETER

the specification of which

(Title of the Invention)

☐ is attached hereto

OR

☒ was filed on (MM/DD/YYYY)

06/23/2000

as United States Application Number or PCT International

Application Number **PCT/JP00/04165** and was amended on (MM/DD/YYYY) **06/08/2001** (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above:

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
11-177952	Japan	06/24/1999	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
11-182995	Japan	06/29/1999	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
2000-34677	Japan	02/14/2000	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
11-106246	Japan	04/14/1999	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

☒ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

+

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Supplemental Priority Data Sheet

Additional foreign applications: -

[illegible]

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. **DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.**

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12/97)
Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION ---- Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transmit all business in the Patent and Trademark Office connected therewith:

☒ Customer Number 20322 OR
☐ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☒ Customer Number or Bar Code Label 20322 OR ☐ Correspondence address below

Name	Michael K. Kelly				
Address	SNELL & WILMER, LLP				
Address	One Arizona Center, 400 E. Van Buren Street				
City	Phoenix	State	AZ	ZIP	85004-2202
Country	USA	Telephone	602-382-6291	Fax	602-382-6070

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: ☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))		Family Name or Surname					
<u>Yasuhiro</u>		<u>UMEKAGE</u>					
Inventor's Signature	<u>Yasuhiro Umekage</u>			Date	<u>12/18/01</u>		
Residence: City	<u>Kurita-gun</u>	State	<u>Shiga</u>	Country	<u>Japan</u>	Citizenship	<u>Japan</u>
Post Office Address	<u>525, Ryosenji, Rittocho, Kurita-gun, Shiga Japan</u>						
Post Office Address							
City	<u>Kurita-gun</u>	State	<u>Shiga</u>	ZIP	<u>520-3035</u>	Country	<u>Japan</u>

☒ Additional inventors are being named on the 4 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (11-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S)

Supplemental Sheet

Page 1 of 4

Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
<u>Yukio</u>		<u>NAGAOKA</u>	
Inventor's Signature <u>Yukio Nagaoka</u>		Date <u>12/18/01</u>	
Residence: City <u>Soraku-gun</u>	State <u>Kyoto</u>	Country <u>Japan</u>	Citizenship <u>Japan</u>
Mailing Address <u>5-20-25, Saganakadai, Kizucho, Soraku-gun, Kyoto Japan</u>			
Mailing Address			
City <u>Soraku-gun</u>	State <u>Kyoto</u>	ZIP <u>619-0223</u>	Country <u>Japan</u>
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
<u>Osamu</u>		<u>EGUCHI</u>	
Inventor's Signature <u>Osamu H Eguchi</u>		Date <u>12/18/01</u>	
Residence: City <u>Kitakatsuragi-gun</u>	State <u>Nara</u>	Country <u>Japan</u>	Citizenship <u>Japan</u>
Mailing Address <u>2-5-6, Kumigaoka, Kawaicho, Kitakatsuragi-gun,</u>			
Mailing Address <u>Nara Japan</u>			
City <u>Kitakatsuragi-gun</u>	State <u>Nara</u>	ZIP <u>636-0063</u>	Country <u>Japan</u>
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
<u>Shuji</u>		<u>ABE</u>	
Inventor's Signature <u>Shuji Ahe</u>		Date <u>12/18/01</u>	
Residence: City <u>Nara</u>	State <u>Nara</u>	Country <u>Japan</u>	Citizenship <u>Japan</u>
Mailing Address <u>21-37-201, Tezukayama 2-chome, Nara-shi, Nara Japan</u>			
Mailing Address			
City <u>Nara</u>	State <u>Nara</u>	ZIP <u>631-0062</u>	Country <u>Japan</u>

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (11-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION	ADDITIONAL INVENTOR(S) Supplemental Sheet Page <u>2</u> of <u>4</u>
--------------------	--

Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle [if any])		Family Name or Surname	
<u>Yuji</u>		<u>NAKABAYASHI</u>	
Inventor's Signature <u>Yuji Nakabayashi</u>		Date <u>12/18/01</u>	
Residence: City <u>Nara</u>	State <u>Nara</u>	Country <u>Japan</u>	Citizenship <u>Japan</u>
Mailing Address <u>A-222, 1-4, Horai, Nara-shi, Nara Japan</u>			
Mailing Address			
City <u>Nara</u>	State <u>Nara</u>	ZIP <u>631-0845</u>	Country <u>Japan</u>
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle [if any])		Family Name or Surname	
<u>Kenzo</u>		<u>OHJI</u>	
Inventor's Signature <u>Kenzo Ohji</u>		Date <u>12/18/01</u>	
Residence: City <u>Ikoma</u>	State <u>Nara</u>	Country <u>Japan</u>	Citizenship <u>Japan</u>
Mailing Address <u>1-680-72, Satsukidai, Ikoma-shi, Nara Japan</u>			
Mailing Address			
City <u>Ikoma</u>	State <u>Nara</u>	ZIP <u>630-0221</u>	Country <u>Japan</u>
Name of Additional Joint Inventor, if any:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle [if any])		Family Name or Surname	
<u>Fumikazu</u>		<u>SHIBA</u>	
Inventor's Signature <u>Fumikazu Shiba</u>		Date <u>12/18/01</u>	
Residence: City <u>Nara</u>	State <u>Nara</u>	Country <u>Japan</u>	Citizenship <u>Japan</u>
Mailing Address <u>2-3-7-204, Omiyacho, Nara-shi, Nara Japan</u>			
Mailing Address			
City <u>Nara</u>	State <u>Nara</u>	ZIP <u>630-8115</u>	Country <u>Japan</u>

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (11-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S)

Supplemental Sheet

Page 3 of 4

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Akihisa

ADACHI

Inventor's
Signature

Akihisa Adachi

Date 12/19/01

Residence: City

Kawasaki

Kanagawa
State

Country

Japan

Citizenship

Japan

Mailing Address

5-40-1-306, Kamiasao, Asao-ku, Kawasaki-shi,

Mailing Address

Kanagawa Japan

City

Kawasaki

Kanagawa
State

ZIP

215-0021

Country

Japan

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Masahiko

HASHIMOTO

Inventor's
Signature

Masahiko Hashimoto

Date 12/20/01

Residence: City

Ota-ku

Tokyo
State

Country

Japan

Citizenship

Japan

Mailing Address

2-3-16-311, Ishikawacho, Ota-ku, Tokyo Japan

Mailing Address

City

Ota-ku

Tokyo
State

ZIP

145-0016

Country

Japan

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Toshiharu

SATO

Inventor's
Signature

Toshiharu Sato

Date 12/25/01

Residence: City

Kawasaki

Kanagawa
State

Country

Japan

Citizenship

Japan

Mailing Address

4-8-7-203, Minamiikuta, Tama-ku, Kawasaki-shi,

Mailing Address

Kanagawa Japan

City

Kawasaki

Kanagawa
State

ZIP

214-0036

Country

Japan

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (11-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S)

Supplemental Sheet

Page 4 of 4

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Yuji

FUJII

Inventor's
Signature

Yuji Fujii

Date 12/19/01

Residence: City

Ikoma

State

Nara

Country

Japan

Citizenship

Japan

Mailing Address

879-14, Tsujimachi, Ikoma-shi, Nara Japan

Mailing Address

City

Ikoma

State

Nara

ZIP 630-0212

Country

Japan

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Inventor's
Signature

Date

Residence: City

State

Country

Citizenship

Mailing Address

Mailing Address

City

State

ZIP

Country

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Inventor's
Signature

Date

Residence: City

State

Country

Citizenship

Mailing Address

Mailing Address

City

State

ZIP

Country

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.